





Manufactured to match its big brothers Ledge and Strato, the Switchback is designed to be an accessible climber, an industry first! The lowest platform of the Switchback conforms to guidelines for transfer platforms. Manufactured with various handholds and climbing surfaces, the four sides all vary in climbing difficulty. The Switchback also accepts 3' slides, so reward the little ones that reach the summit!

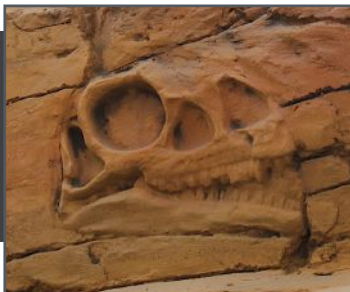

Embedded Fossils

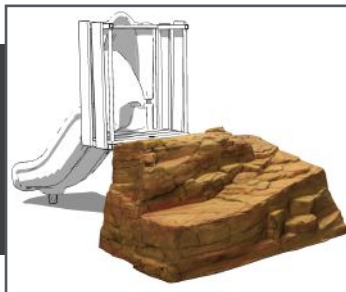

**Switchback Rock Climber
w/Slide Attachment**

L: 6'-10" x W: 5'-1" x H: 3'-0"
1,400 LBS




Integrated Handholds



Switchback Rock Climber with Slide Attachment

Installation Instructions

Product: 1000033


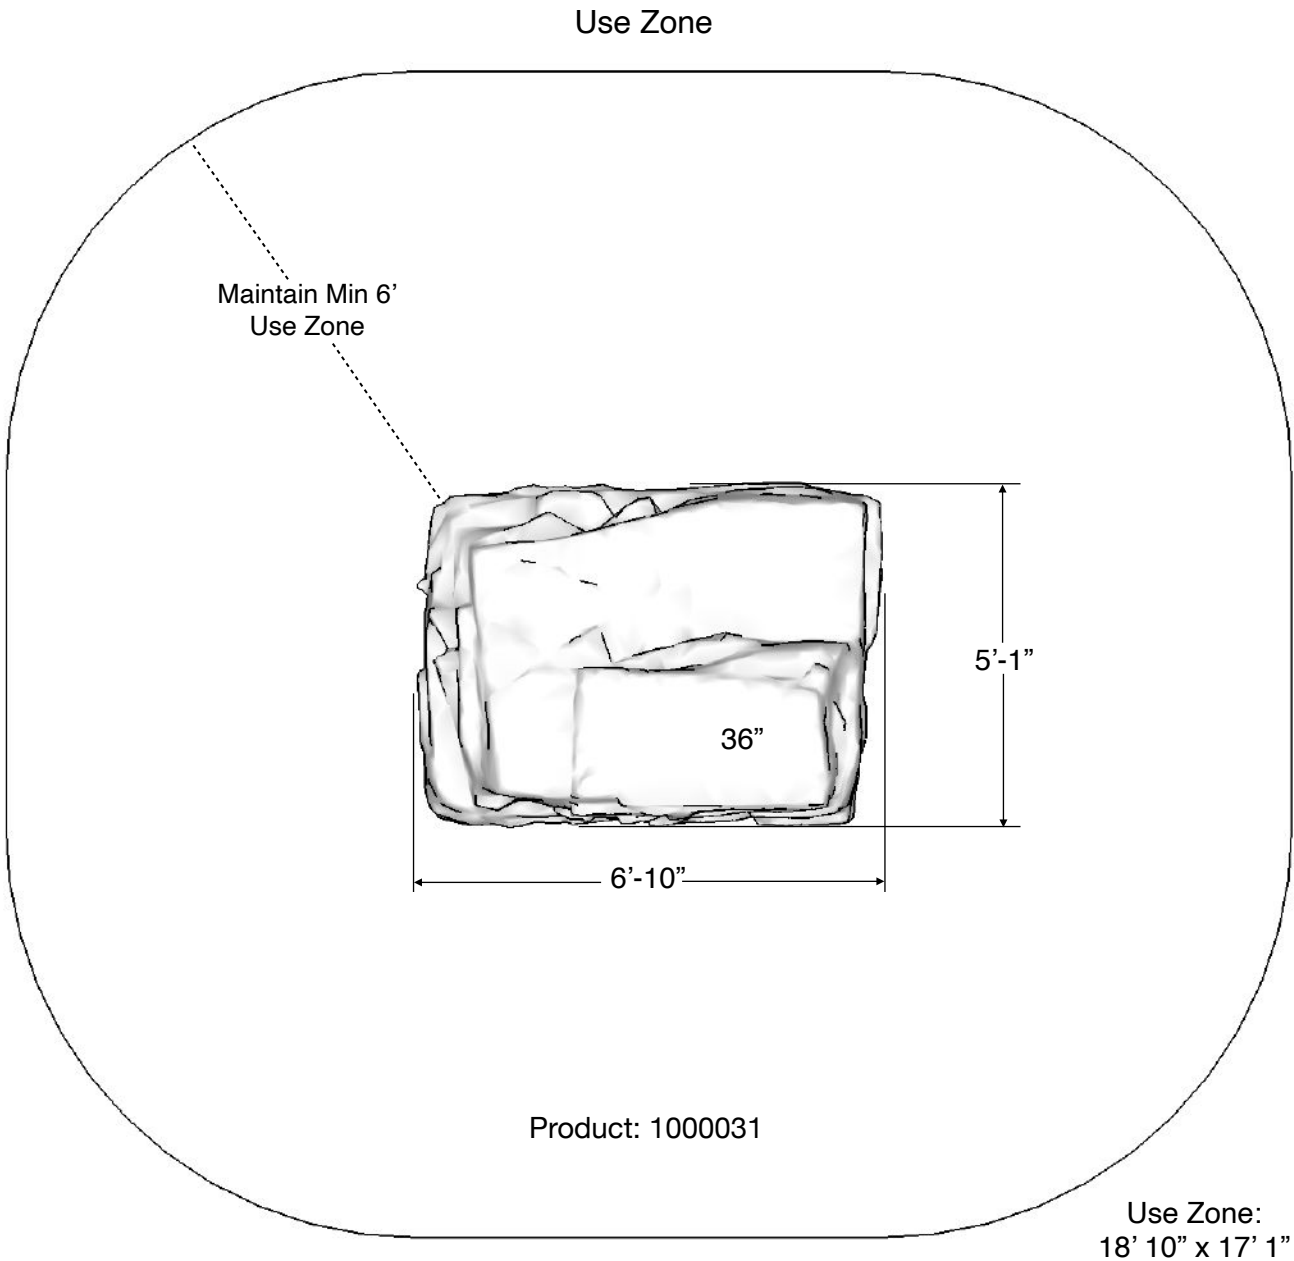


Included Items:

Part #	Item	Description	Quantity
1000033	Switchback Rock Climber w/ Slide Attachment	Play Equipment	1
HK131	Anchor Bolt 5/8" x 6"	Mounting Hardware	4

~ All dimensions are approximate ~
User Group Age: 5-12
Last Revised 2/19/2026

2401 Edgewood Ave S • Suite 200
St. Louis Park, MN 55426
612.670.8195
info@cre8play.com
cre8play.com

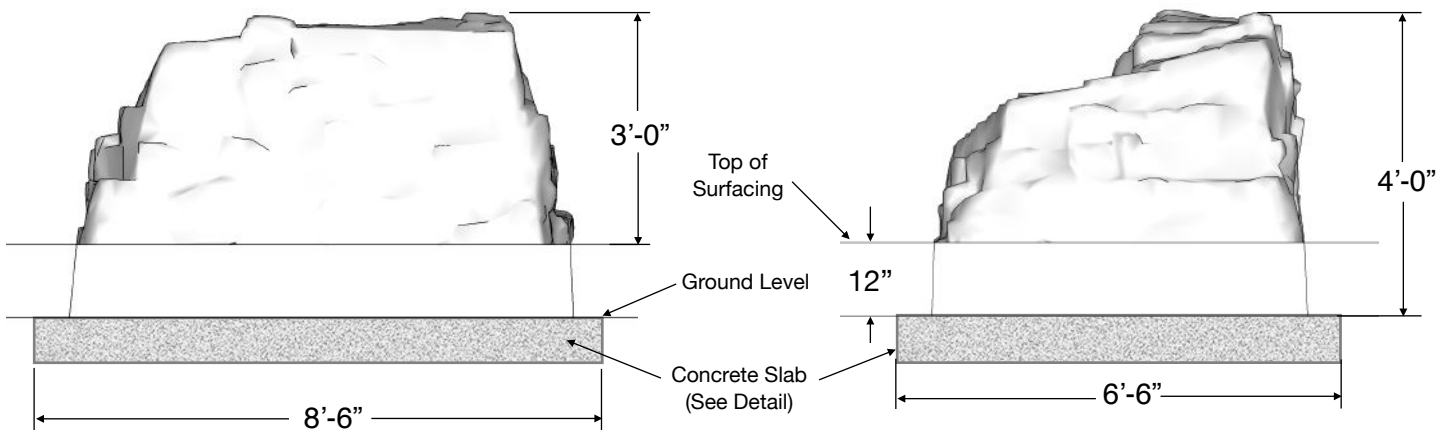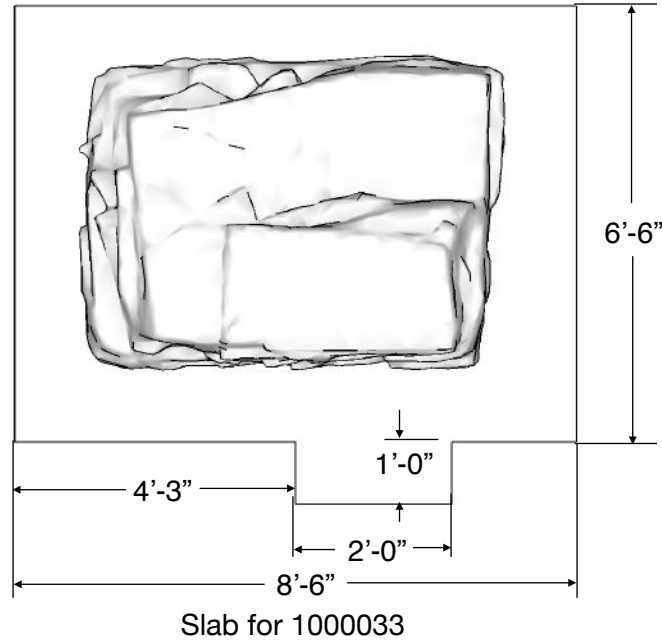

If you determine that less than 12" of surfacing is required, make sure the top of the concrete slab is 12" below the top of the protective surfacing.

NOTE: Read installation instructions thoroughly before starting installation process.

Step 1: Lay out the area and prepare the site for install. Concrete must be installed over a solid, level base. Check local soil condition and codes. See installation instructions sheet for minimum use zone requirements to ensure proper spacing and adequate surfacing area.

Step 2: Pour a concrete base for the Switchback Rock Climber. Refer to the typical slab section on this page. The concrete should be flush with the ground level. Allow time for the concrete to completely cure before continuing.

Step 3: Using an appropriate lull-type forklift or boom, place Switchback Rock Climber into final installation location. See the hardware recommendation page for information on anchoring equipment down to your slab. Refer to the surfacing manufacturer for installation of an approved impact attenuating play surface around the Switchback Rock Climber with a minimum of 6 feet in every direction.


Step 4: Locate your anchor bolts, supplied by Cre8Play. Using the proper standard drill bit size noted in the installation table, drill the concrete to the appropriate hole depth (C).


Step 5: Insert the anchor bolt into the hole and tighten until the bolt is fully seated. Do NOT over tighten the anchor bolts.

Note: See separate installation instructions for Switchback Slides to install Switchback Rock Climber product number 200052 or 200053.

NOTES PRIOR TO CONSTRUCTION:

- Use appropriate equipment to lift and move the play equipment.
- Check local codes and requirements prior to digging or installing any equipment.

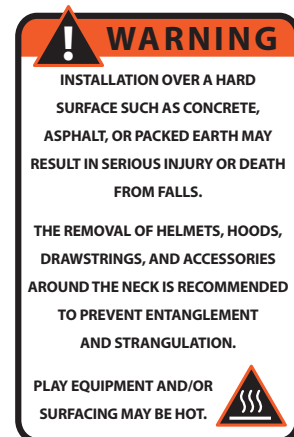


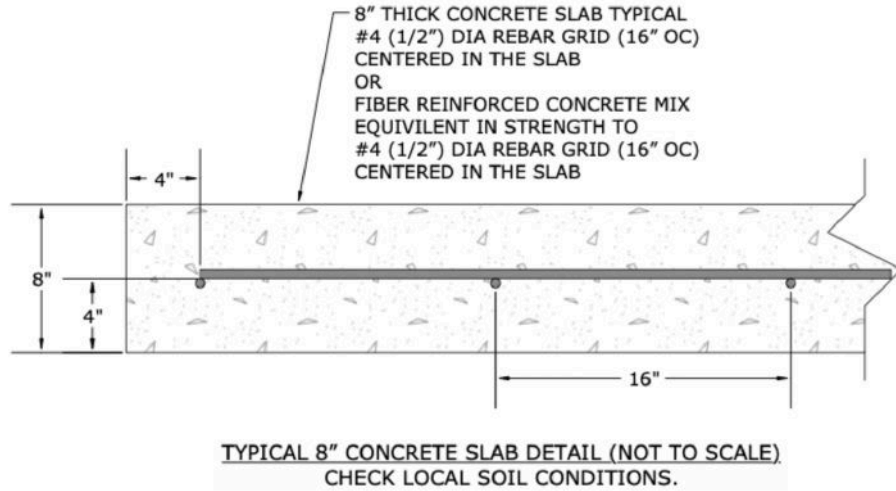


Installation Table

Anchor Bolt Size	ANSI Standard Drill Bit Diameter	Anchor Head (Socket Size) Diameter (A)	Minimum Embedment (B)	Hole Depth (C)
5/8" x 6"	1/2"	13/16"	5 1/2"	6 1/2"


Anchor Bolt (Large Diameter Tapcon)
Installation:




Mounting Detail
(Not to Scale)

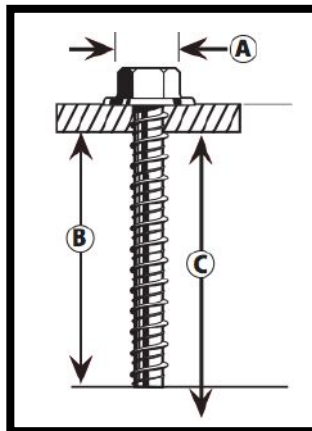

Step 1: Drill

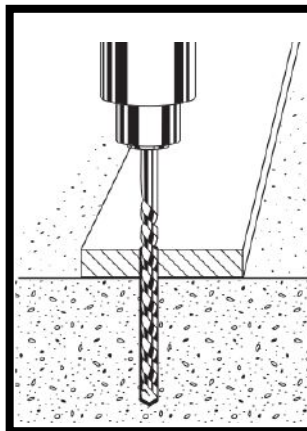

Step 2: Anchor

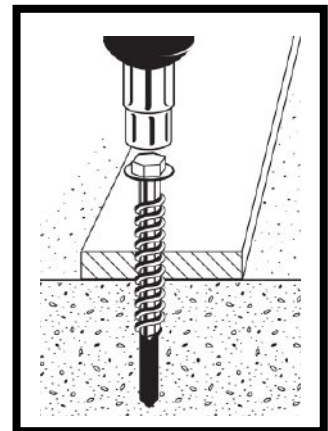

NOTE: Always wear eye protection appropriate to the task at hand.

~ All dimensions are approximate ~

User Group Age: 5-12

Last Revised 2/19/2026