





| # | Part #   | Component                         | Install # | Qua |
|---|----------|-----------------------------------|-----------|-----|
| A | TF48R    | Base-48 (Tree Fort)               | TF24      | 1   |
| B | TF72     | Base-72 (Tree Fort)               | TF24      | 1   |
| C | TP36T    | Base-36 (Tree Post)               | TP24      | 1   |
| D | FA4000   | Log Transfer Platform - 3'        | FA4000    | 1   |
| E | FA4301   | Accessible Step Link - 2' Rise    | FA4300    | 1   |
| F | FA4307   | Valley Crossing Climber - 1' Rise | FA4303    | 1   |
| G | FA4308   | Timber Ridge Climber - 2' Rise    | FA4303    | 1   |
| H | FA4701   | Stream Slide - 3'                 | FA4701    | 1   |
| I | FA4704   | Stream Slide - 6'                 | FA4701    | 1   |
| J | FA4901   | Tin Roof (Tree Fort)              | FA4900    | 1   |
| K | FA4902   | Pine Tree Topper (TP) - 2' to 6'  | FA4902    | 2   |
| L | FA5102   | Big Oak Climber - 6'              | FA5100    | 1   |
| M | FA5104   | Ladder Climber - 4'               | FA5103    | 1   |
| N | FA5118   | Oak Slice - 4'-SM                 | FA5117    | 1   |
| O | FA5132   | Boulder Climber (Lg) - 3'         | FA5109    | 1   |
| P | FA3000   | Tree House - 8'                   | FA3000    | 1   |
| Q | FA5138   | Climbing Wall - 8'                | FA5134    | 1   |
| R | FA5140   | Rope Ladder - 8'                  | FA5126    | 1   |
| S | FA4705   | Tube Slide Entrance Panel         | FA4705    | 1   |
| T | ZZUN3007 | Tube Slide Straight Section       | ZZCH3006  | 1   |
| U | ZZUN3009 | Tube Slide Right Section          | ZZCH3006  | 5   |
| V | ZZUN3475 | Spiral Tube Slide Support - 9'    | ZZUN3475  | 1   |
| W | VA3003   | 5-12 Age Plaque                   | Installed | 1   |
| X | FA4505L  | Enclosure-15"-Left Hand           | FA4505    | 6   |
| Y | FA4505R  | Enclosure-15"-Right Hand          | FA4505    | 6   |




FA3000 - TREE HOUSE  
6'-6" X 7'-9" X 8'-2" H  
1,300 LBS

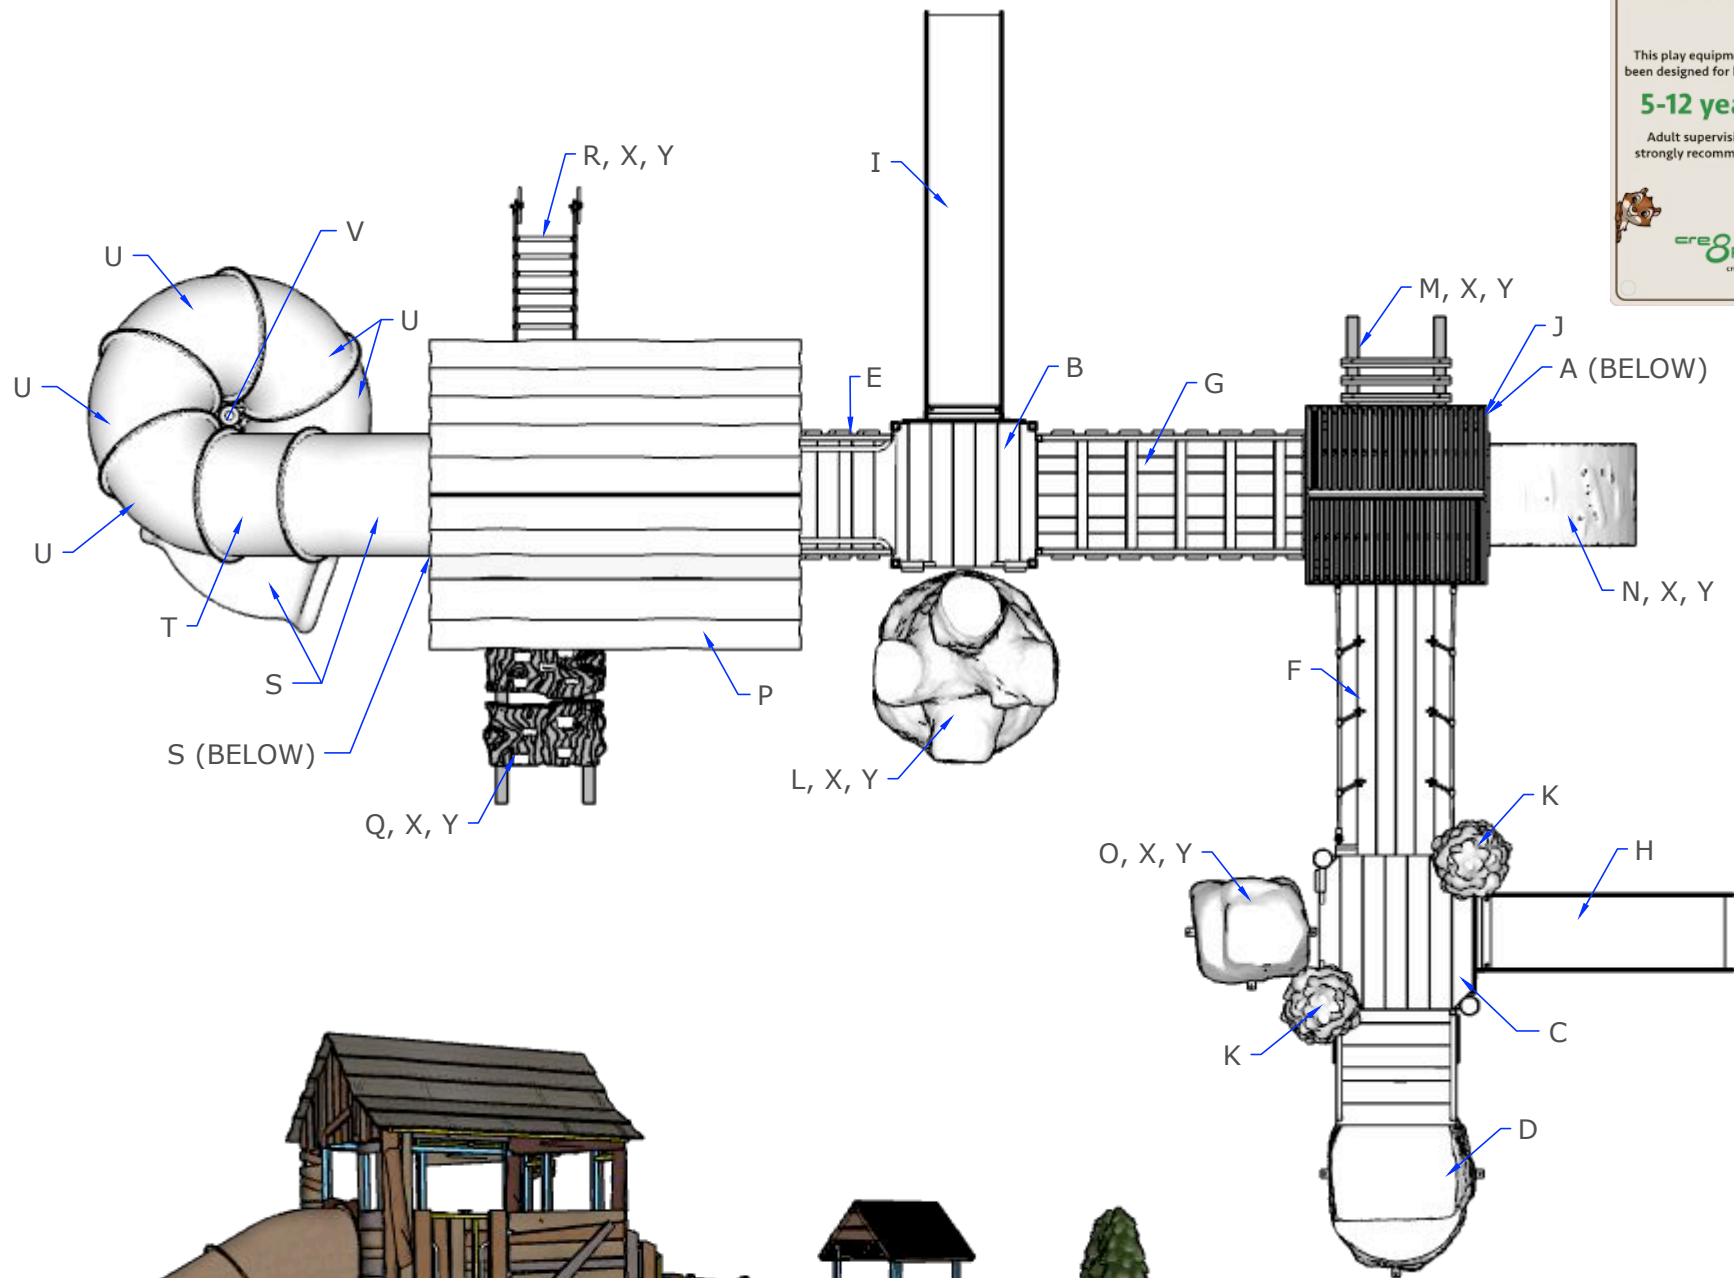


FA3000 - TREE BASE  
6'-4" X 7'-0" X 9'-0" H  
3,900 LBS

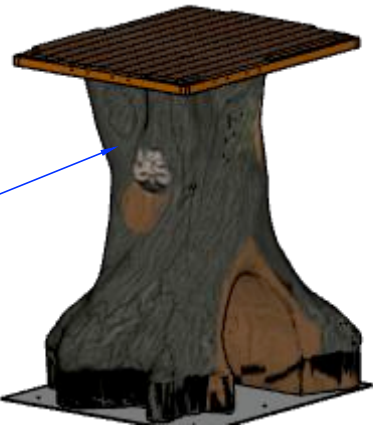

NOTE - IF THE SLIDE CONFIGURATION CHANGES, THE CONCRETE FOOTINGS MUST BE ADJUSTED.

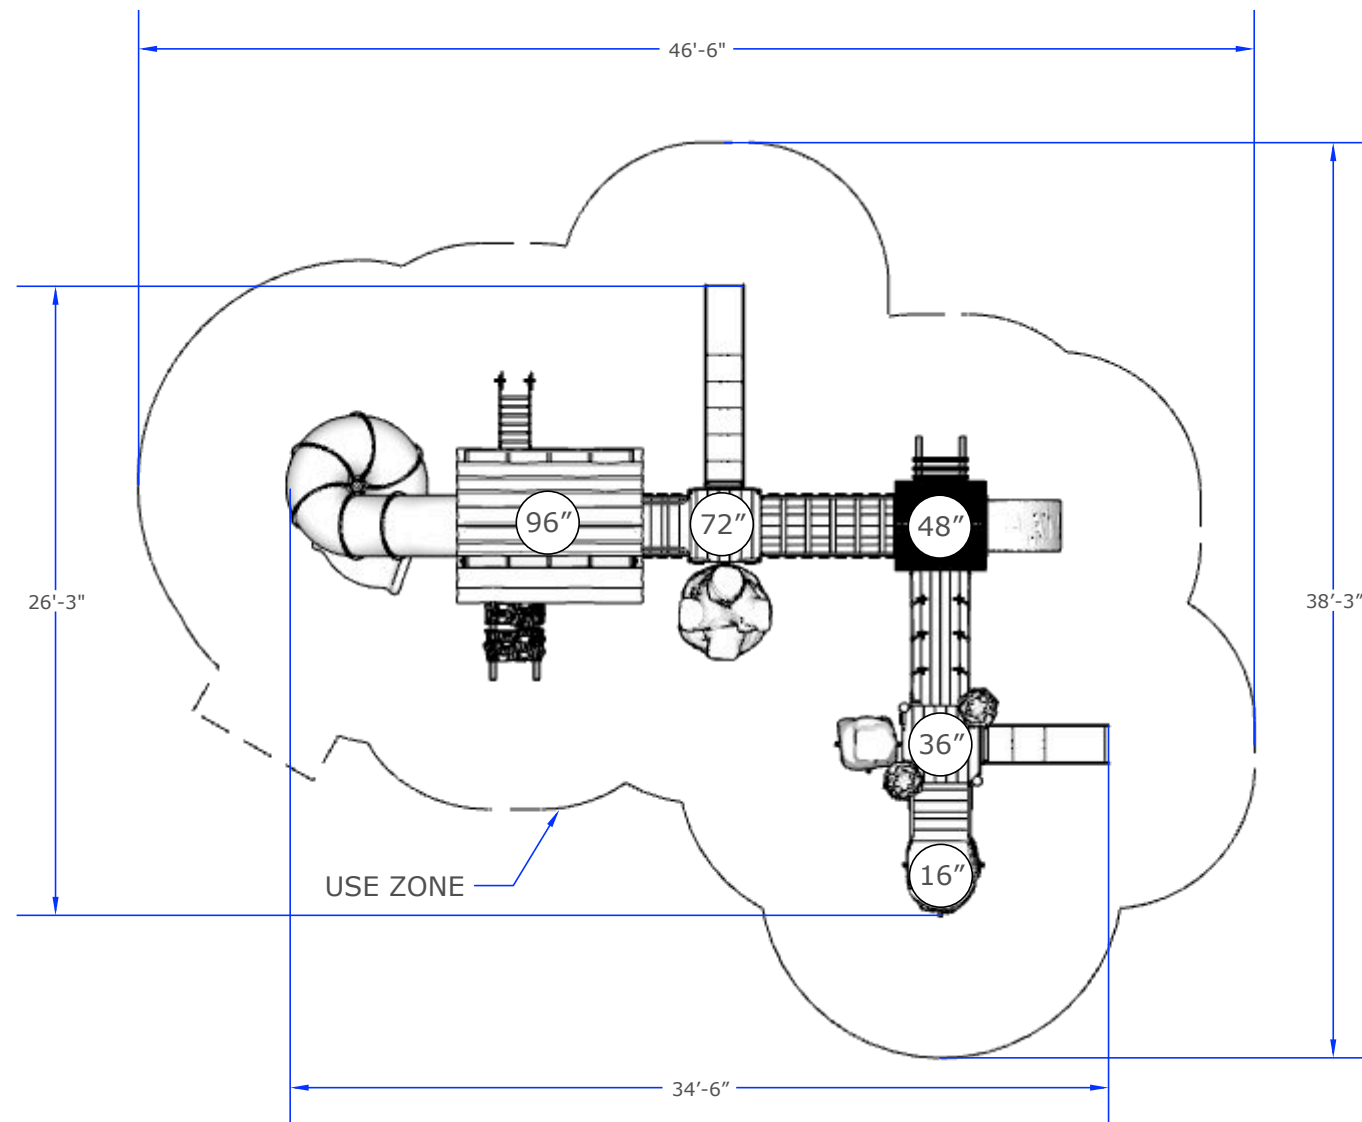


**A**  
2 80007-ADVENTUREVILLE  
PLAN VIEW

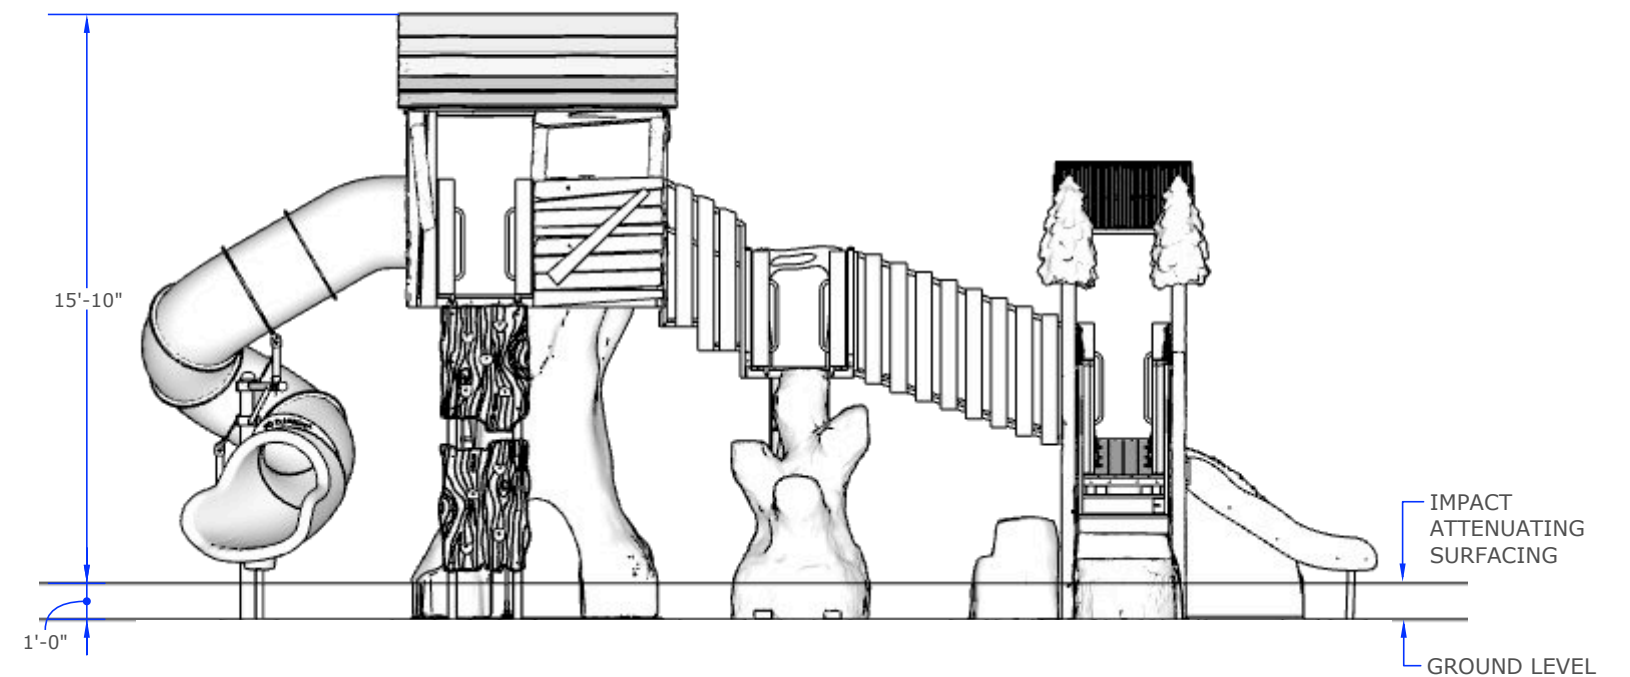

**B**  
2 80007-ADVENTUREVILLE  
ELEVATION


**Installation Notes:**

- 1- Paved surfaces, such as asphalt and concrete, are NOT acceptable for use under your structure.
- 2- It is the consumer's responsibility to check with local utilities prior to excavating footings for any underground utility lines that may exist within the installation area.
- 3- It is the consumer's responsibility to check local soil conditions and drainage within the site area. Inquire with local contractors for appropriate recommendations.
- 4- Assemble the entire structure BEFORE anchoring to concrete unless instructed in the individual component installation instructions.
- 5- Read the installation instructions provided prior to beginning construction.
- 6- The complete area under and around your play structure must be covered with impact attenuating material.

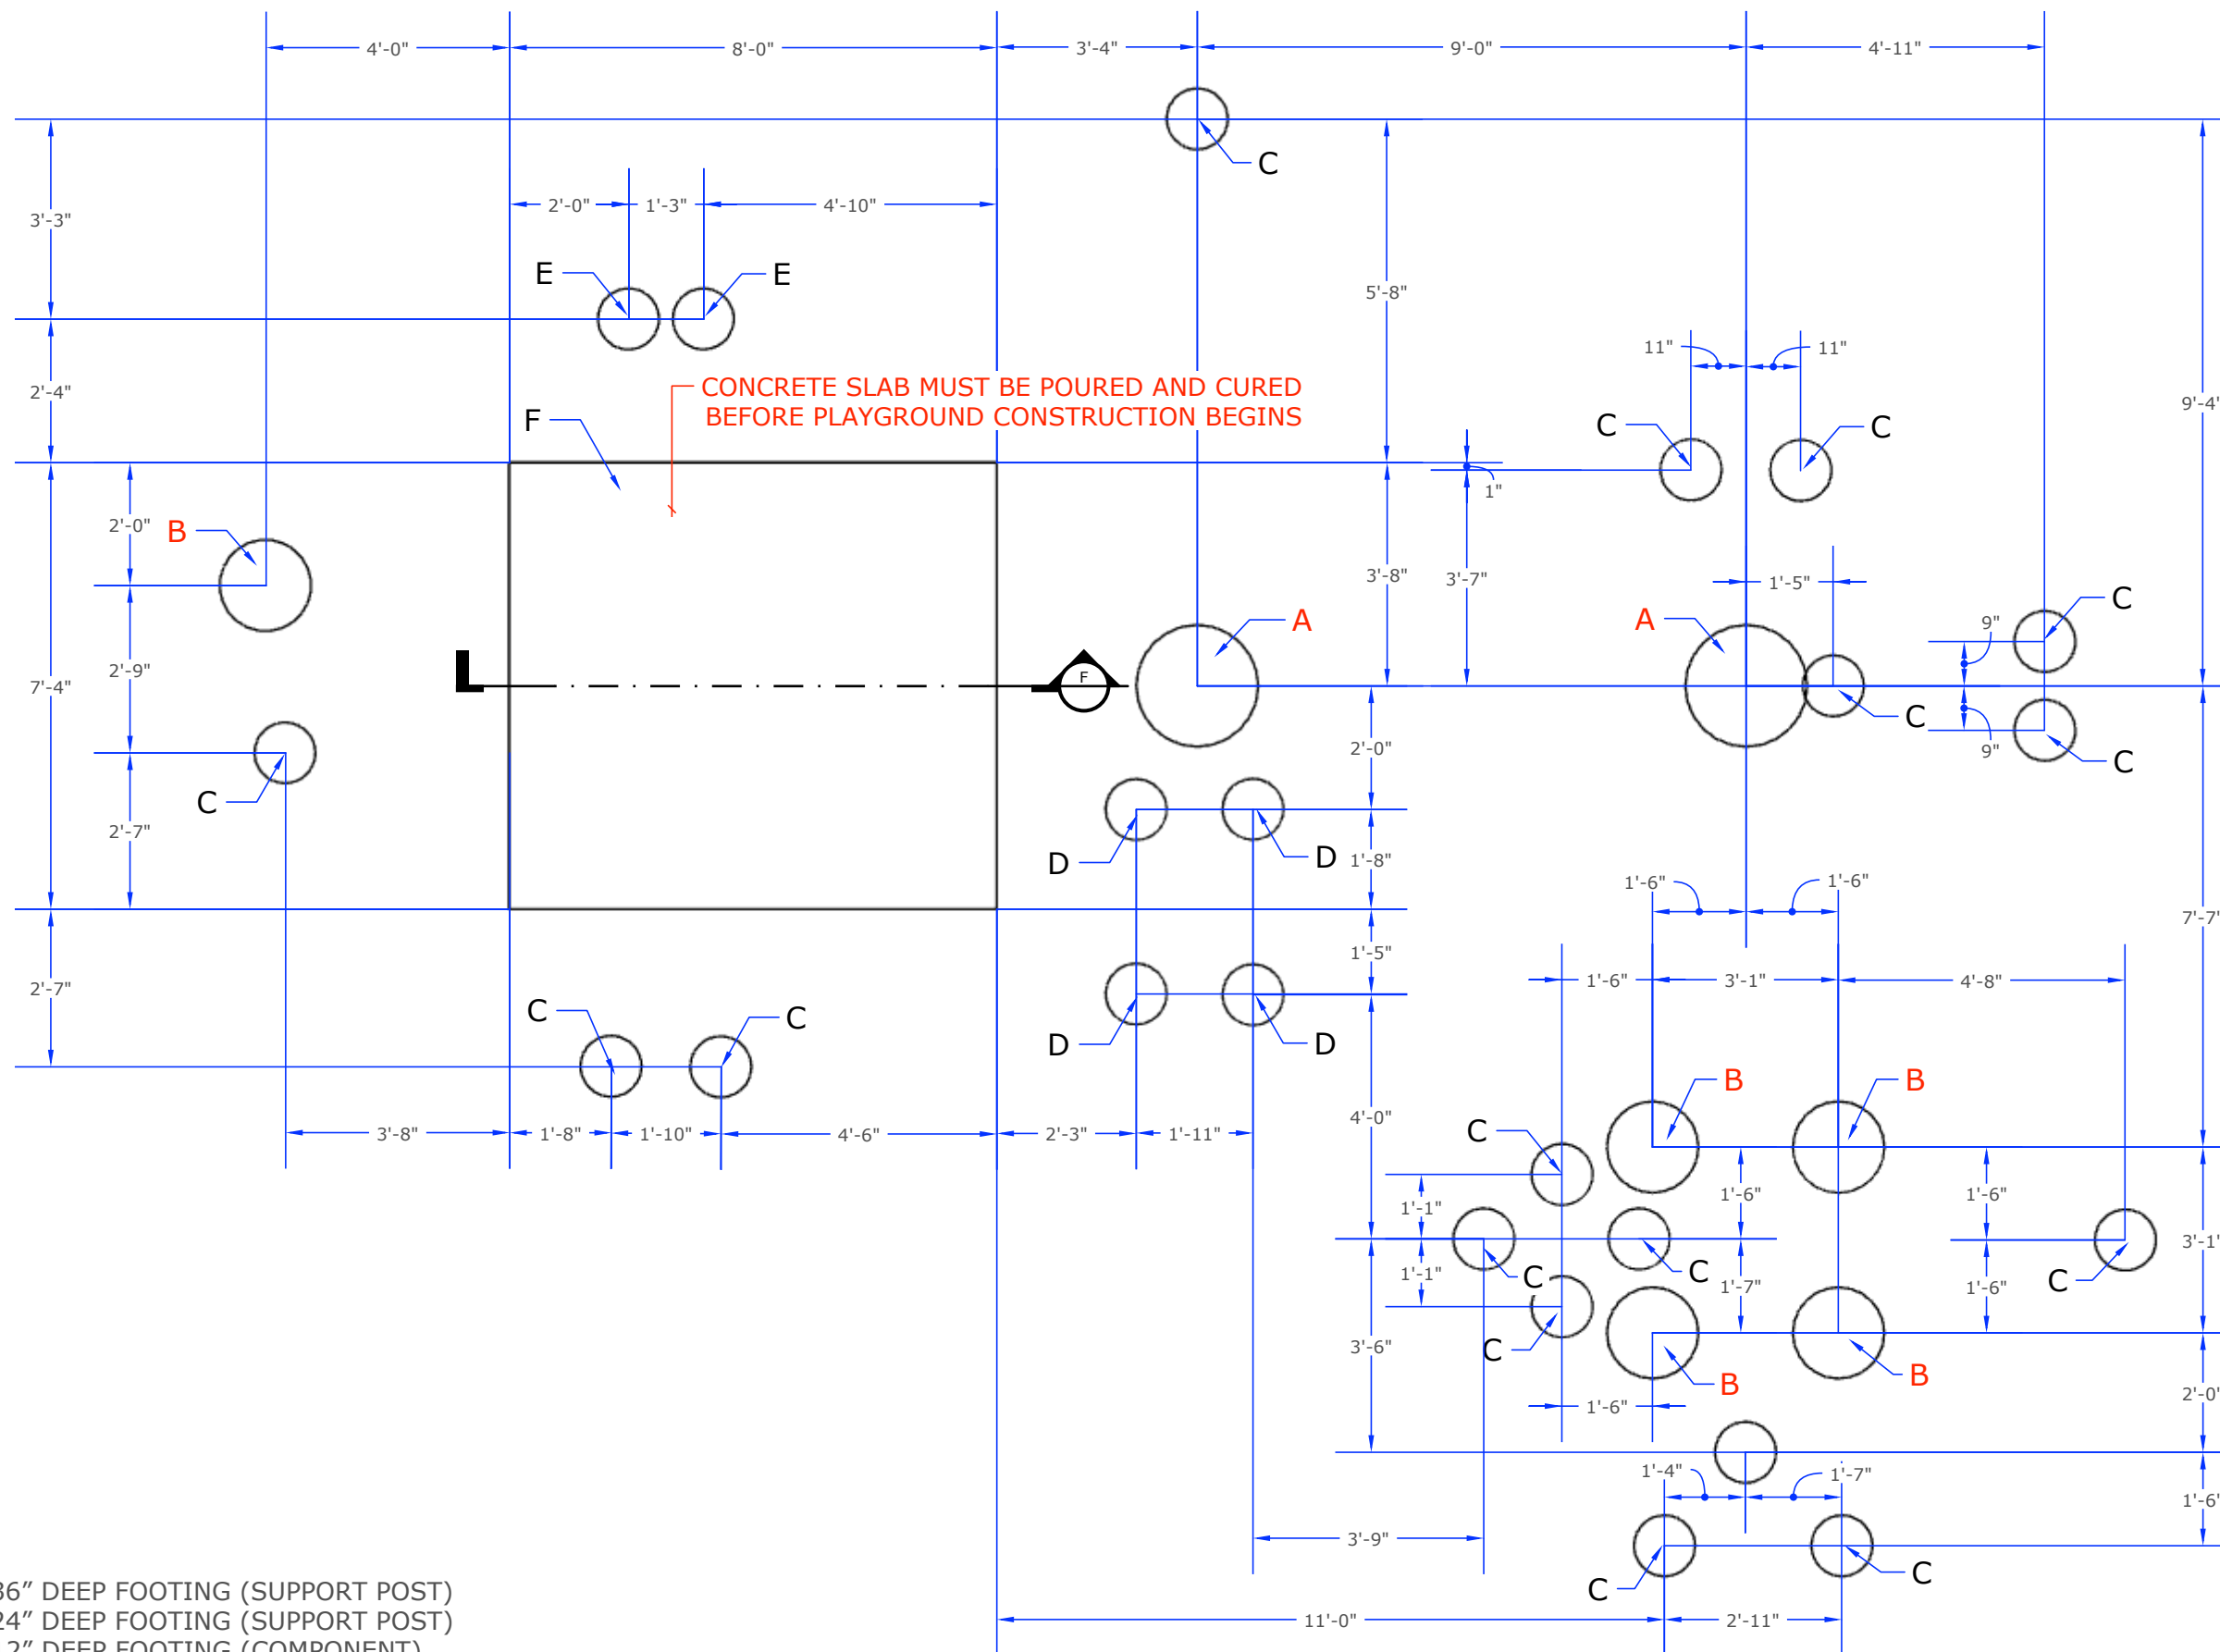


- A = 24" DIAMETER X 36" DEEP FOOTING (SUPPORT POST)
- B = 18" DIAMETER X 24" DEEP FOOTING (SUPPORT POST)
- C = 12" DIAMETER X 12" DEEP FOOTING (COMPONENT)
- D = 12" DIAMETER X 18" DEEP FOOTING (COMPONENT)
- E = 12" DIAMETER X 24" DEEP FOOTING (COMPONENT)
- F = 15" DEEP SLAB (SEE PAGE 6)


**A**  
3 CONCRETE FOOTERS  
PLAN VIEW

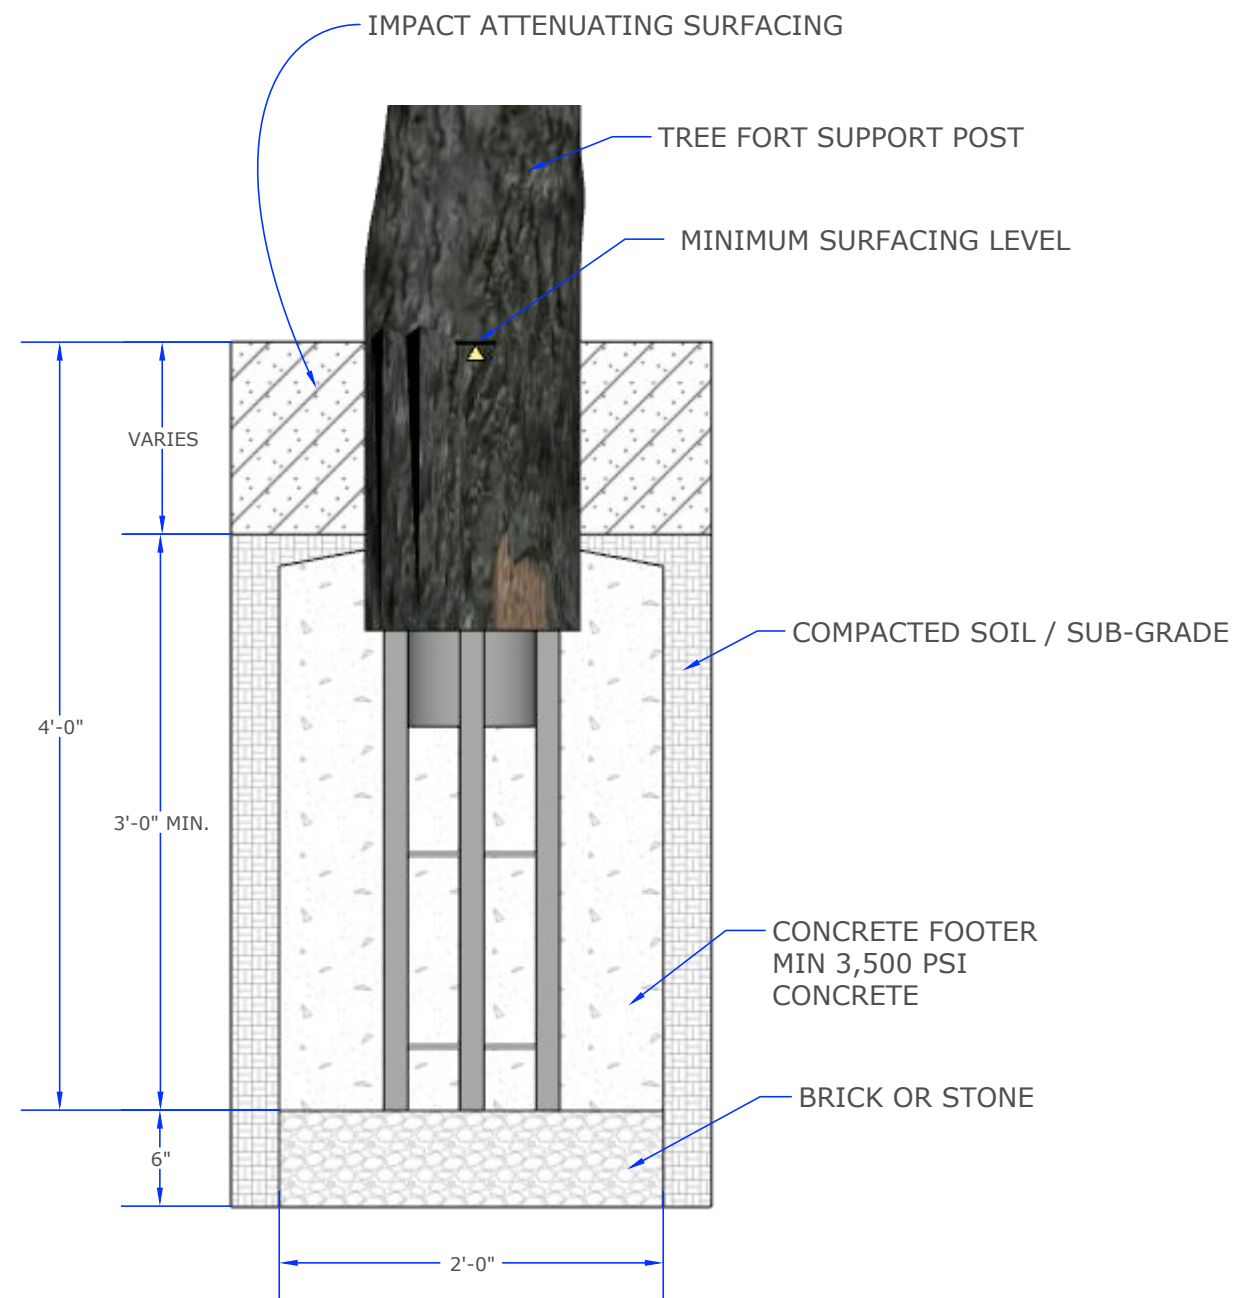

**A** CONCRETE FOOTING SECTION  
SECTION-ELEVATION

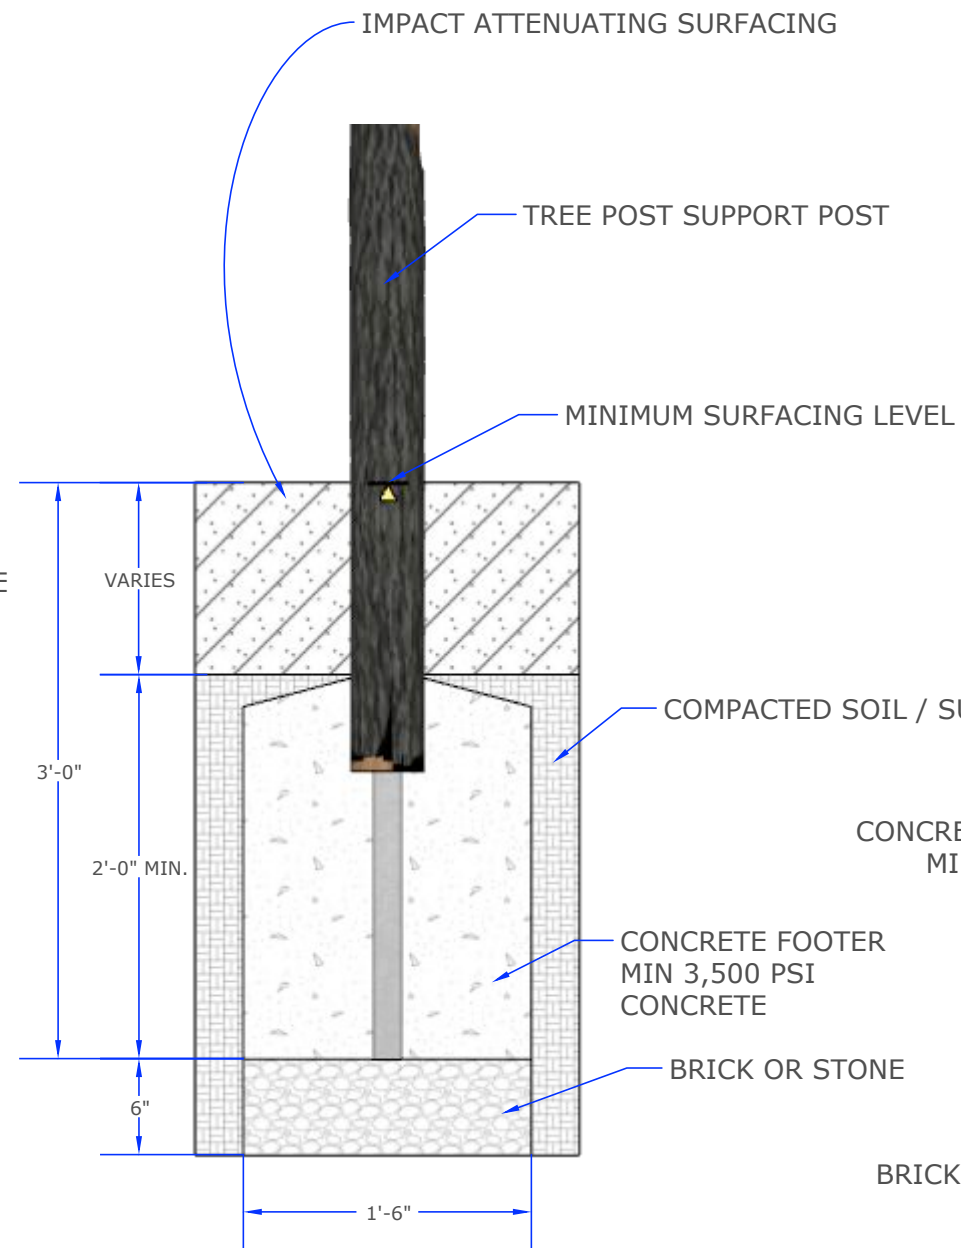


**B** CONCRETE FOOTING SECTION  
SECTION-ELEVATION

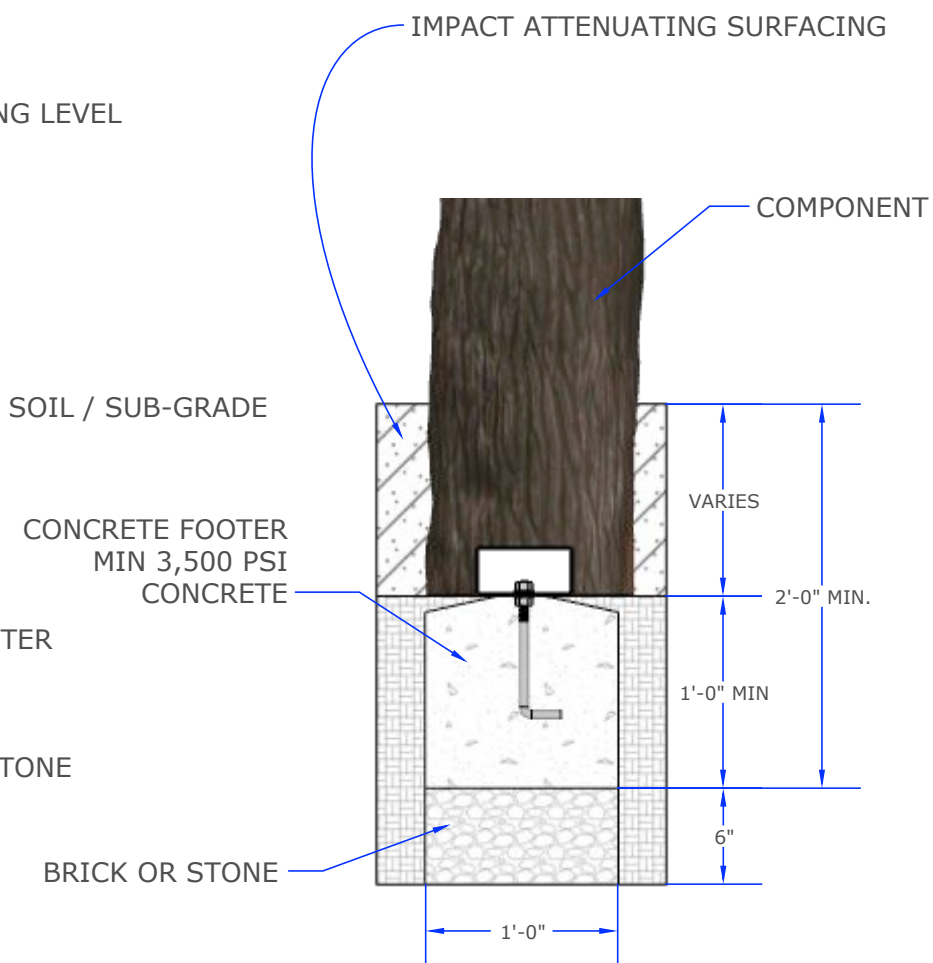


**C** CONCRETE FOOTING SECTION  
SECTION-ELEVATION

**Concrete Footing Notes:**

- 1- Do not encase the bottom of the support post in concrete. Place the post directly on packed stone or brick.
- 2- The footings shown in this document are recommendations based on historical performance in average soil conditions. Footing dimensions may be modified by owner based on actual soil conditions. Before changing footing dimensions, we strongly recommend the footings be reviewed and approved by a registered engineer.
- 3- The base of the footings must be below the frost line.
- 4- Assemble the entire play structure before pouring concrete unless instructed to do so in the individual play component.

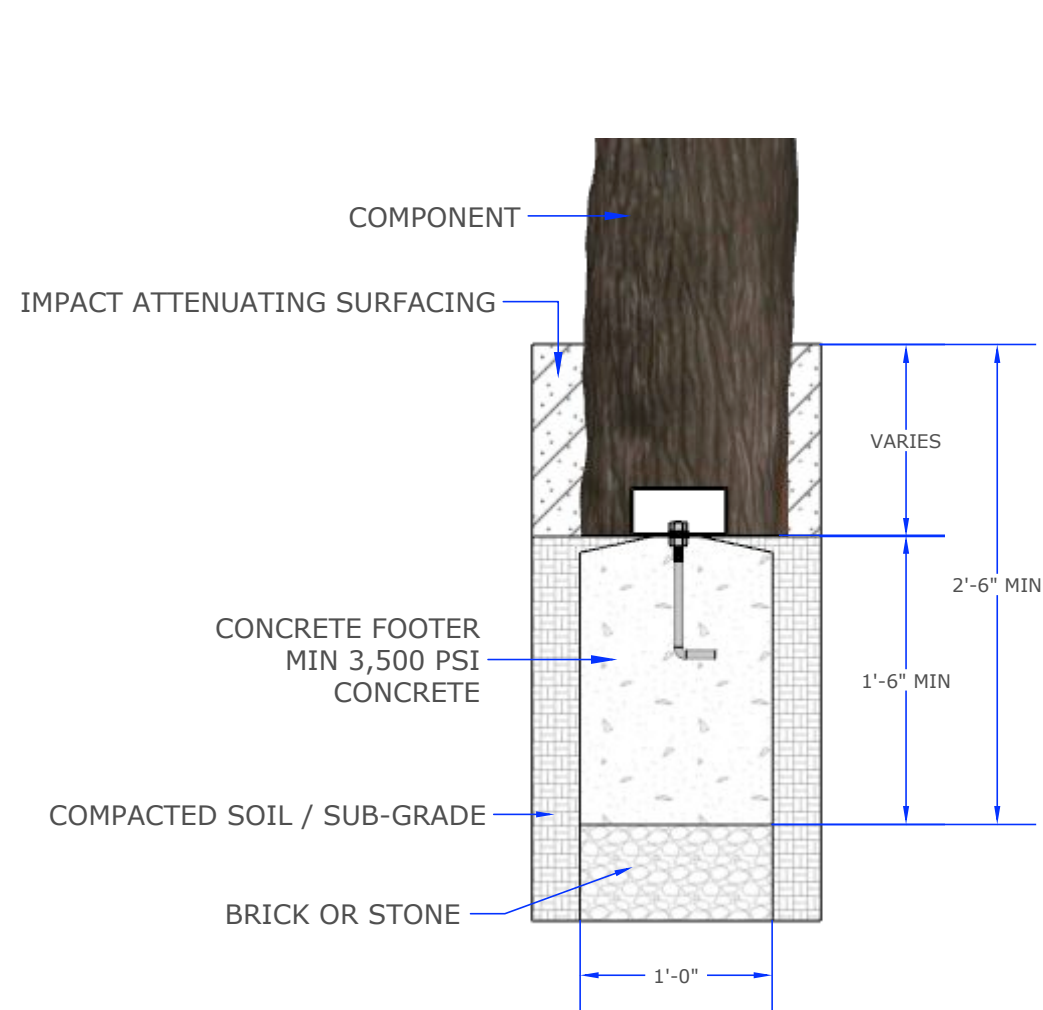


**D** CONCRETE FOOTING SECTION  
SECTION-ELEVATION

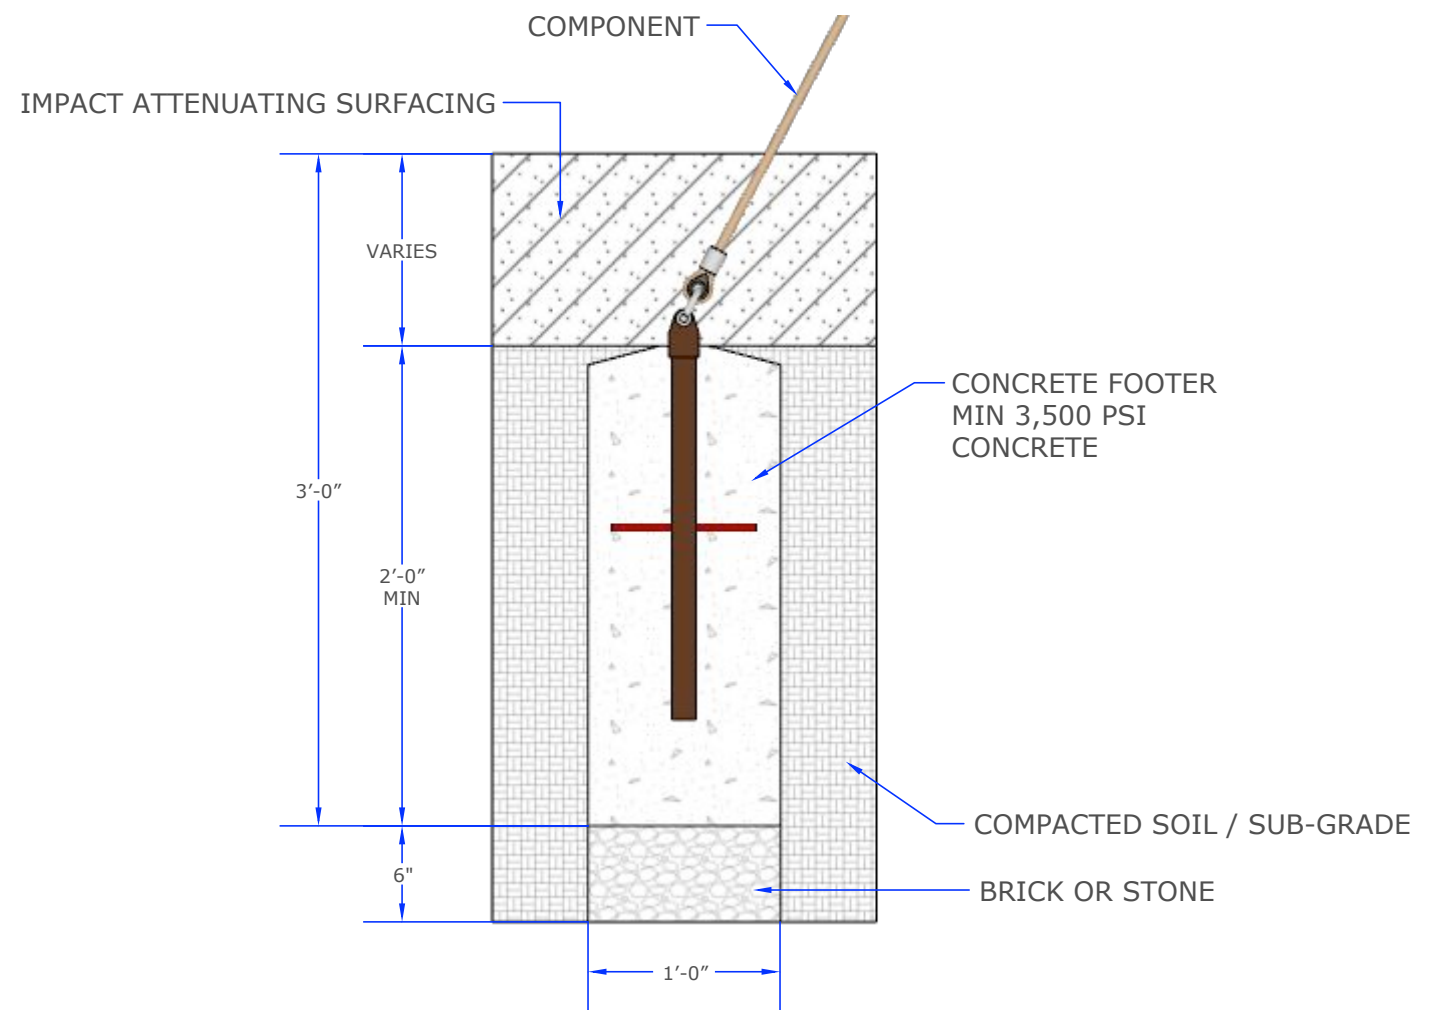

**E** CONCRETE FOOTING SECTION  
SECTION-ELEVATION

**Concrete Footing Notes:**



- 1- Do not encase the bottom of the support post in concrete. Place the post directly on packed stone or brick.
- 2- The footings shown in this document are recommendations based on historical performance in average soil conditions. Footing dimensions may be modified by owner based on actual soil conditions. Before changing footing dimensions, we strongly recommend the footings be reviewed and approved by a registered engineer.
- 3- The base of the footings must be below the frost line.
- 4- Assemble the entire play structure before pouring concrete unless instructed to do so in the individual play component.

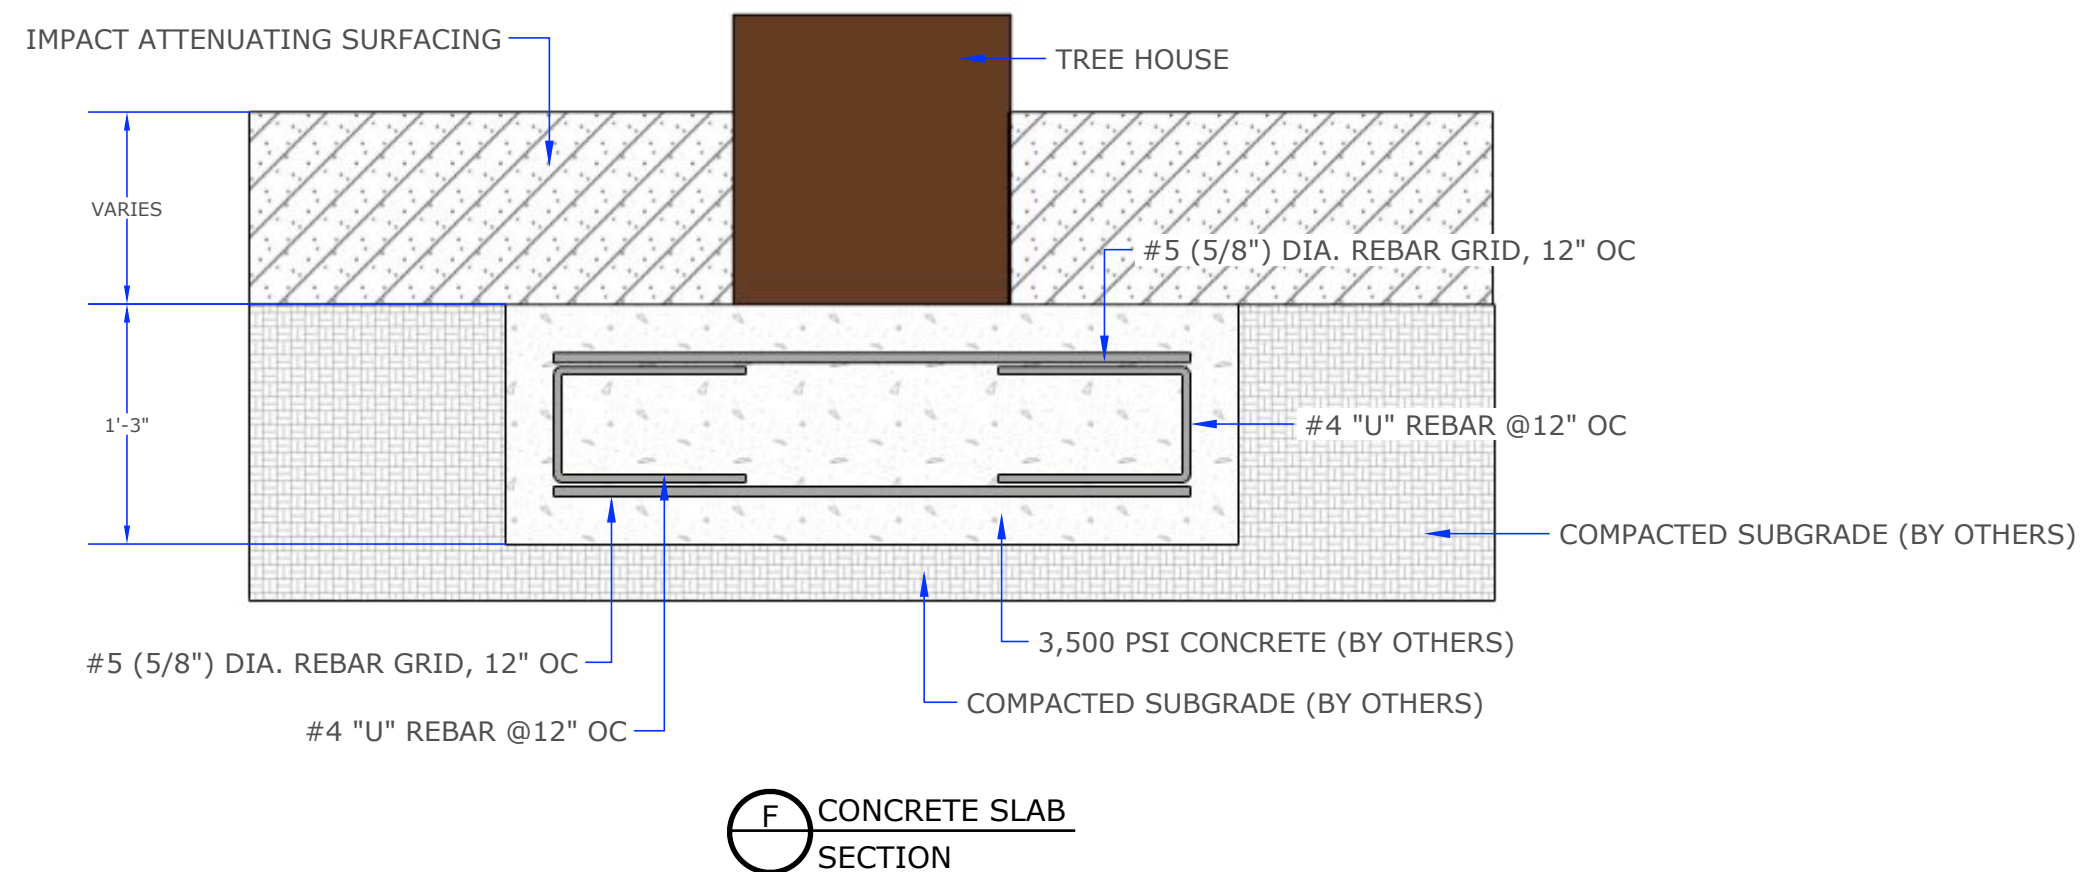

**Concrete Slab Notes:**

- 1- Concrete slabs shown in this document are recommendations based on historical performance in average soil conditions. Footing dimensions may be modified by owner based on actual soil conditions. Before changing slab dimensions, we strongly recommend the slabs be reviewed and approved by a registered engineer.
- 3- Assemble the entire play structure before anchoring it to the concrete unless instructed to do so in the individual play component.

# = ASSEMBLY SEQUENCE

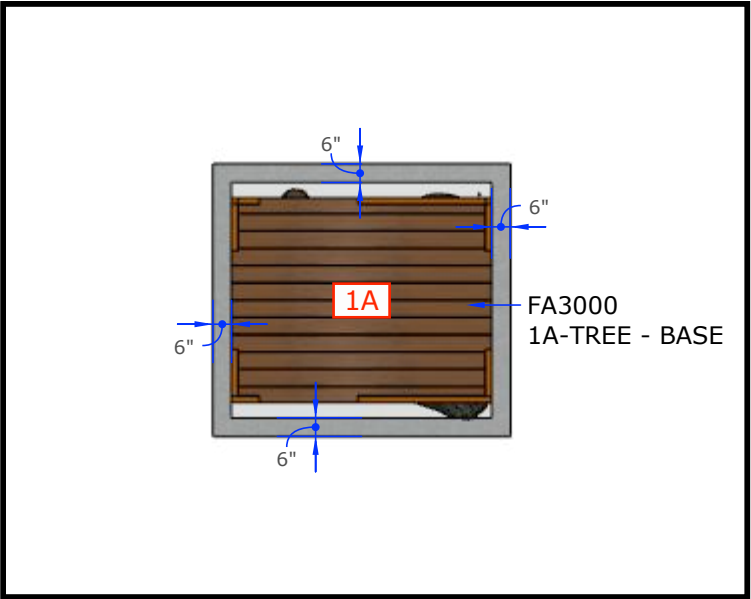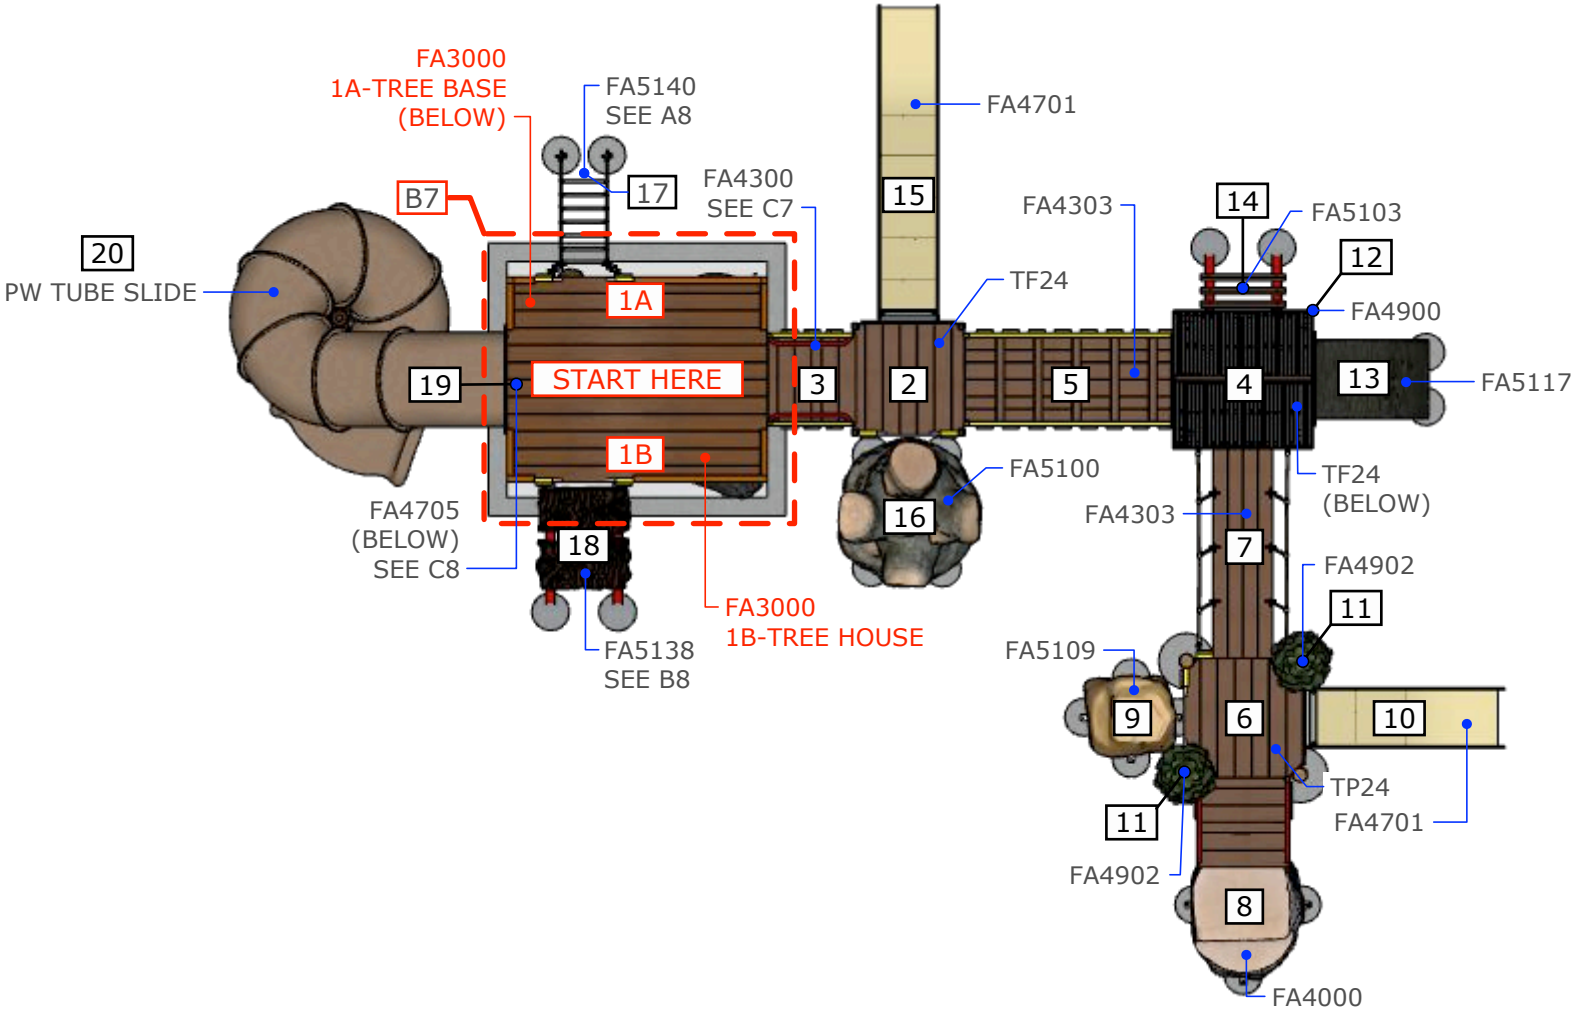

B 1A-TREE - BASE LOCATION  
7 DETAIL

A 80007-ADVENTUREVILLE  
7 PLAN VIEW