





#	Part #	Component	Install #	Qua
A	TF48RS	Base-48-SM (Tree Fort)	TF24S	1
B	TF72S	Base-72-SM (Tree Fort)	TF24S	1
C	TP36ST	Base-36-SM (Tree Post)	TP24S	1
D	FA4000S	Log Transfer Platform - 3'-SM	FA4000S	1
E	FA4301	Accessible Step Link - 2' Rise	FA4300	1
F	FA4307	Valley Crossing Climber - 1' Rise	FA4303	1
G	FA4308	Timber Ridge Climber - 2' Rise	FA4303	1
H	FA4701S	Stream Slide - 3'-SM	FA4701S	1
I	FA4704S	Stream Slide - 6'-SM	FA4701S	1
J	FA4901	Tin Roof (Tree Fort)	FA4900	1
K	FA4902S	Pine Tree Topper (TP) - 2' to 6'-SM	FA4902S	2
L	FA5102S	Big Oak Climber - 6'-SM	FA5100S	1
M	FA5104S	Ladder Climber - 4'-SM	FA5103S	1
N	FA5118S	Oak Slice - 4'-SM	FA5117S	1
O	FA5132S	Boulder Climber (Lg) - 3'-SM	FA5109S	1
P	FA3000S	Tree House - 8'-SM	FA3000S	1
Q	FA5138S	Climbing Wall - 8'-SM	FA5134S	1
R	FA5140S	Rope Ladder - 8'-SM	FA5126S	1
S	FA4705S	Tube Slide Entrance Panel - SM	FA4705S	1
T	ZZUN3007	Tube Slide Straight Section	ZZCH3006	1
U	ZZUN3009	Tube Slide Right Section	ZZCH3006	5
V	ZZUN3475S	Spiral Tube Slide Support - 9' - SM	ZZUN3475	1
W	VA3003	5-12 Age Plaque	Installed	1
X	FA4505L	Enclosure-15"-Left Hand	FA4505	6
Y	FA4505R	Enclosure-15"-Right Hand	FA4505	6

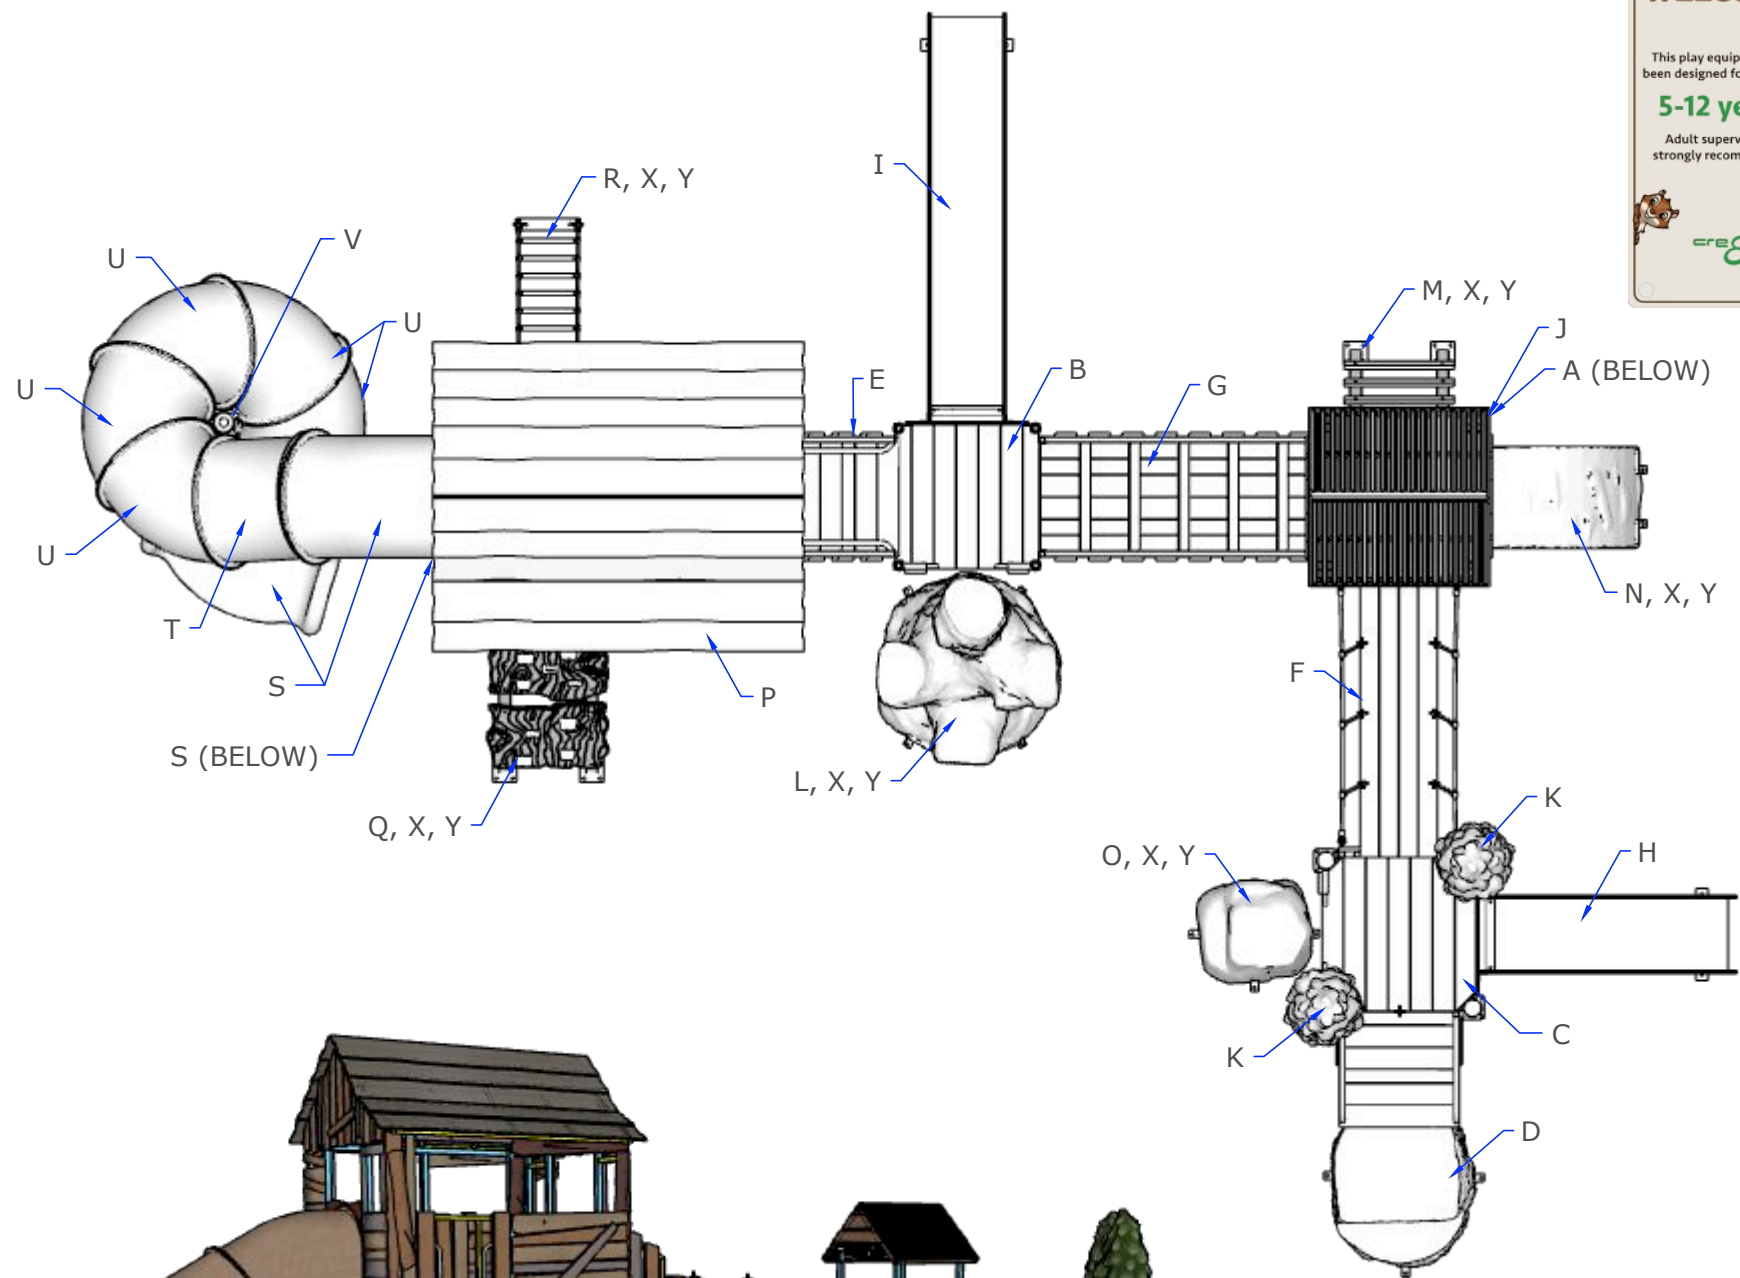



NOTE - IF THE SLIDE CONFIGURATION CHANGES, THE CONCRETE SLAB MUST BE ADJUSTED.

FA3000S - TREE HOUSE
6'-6" X 7'-9" X 8'-2" H
1,300 LBS

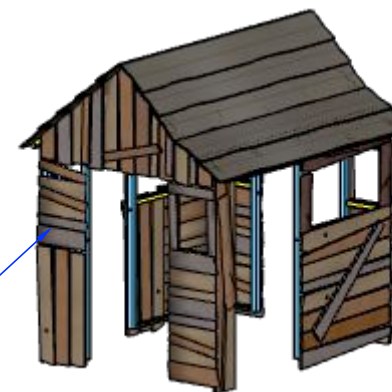


FA3000S - TREE BASE
6'-4" X 7'-0" X 8'-2" H
3,600 LBS

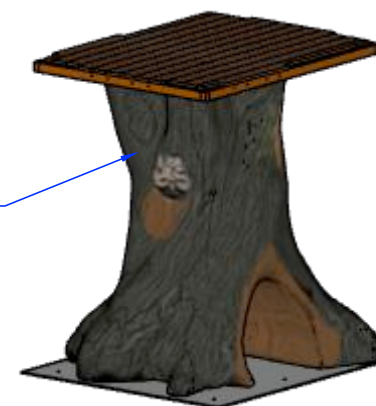

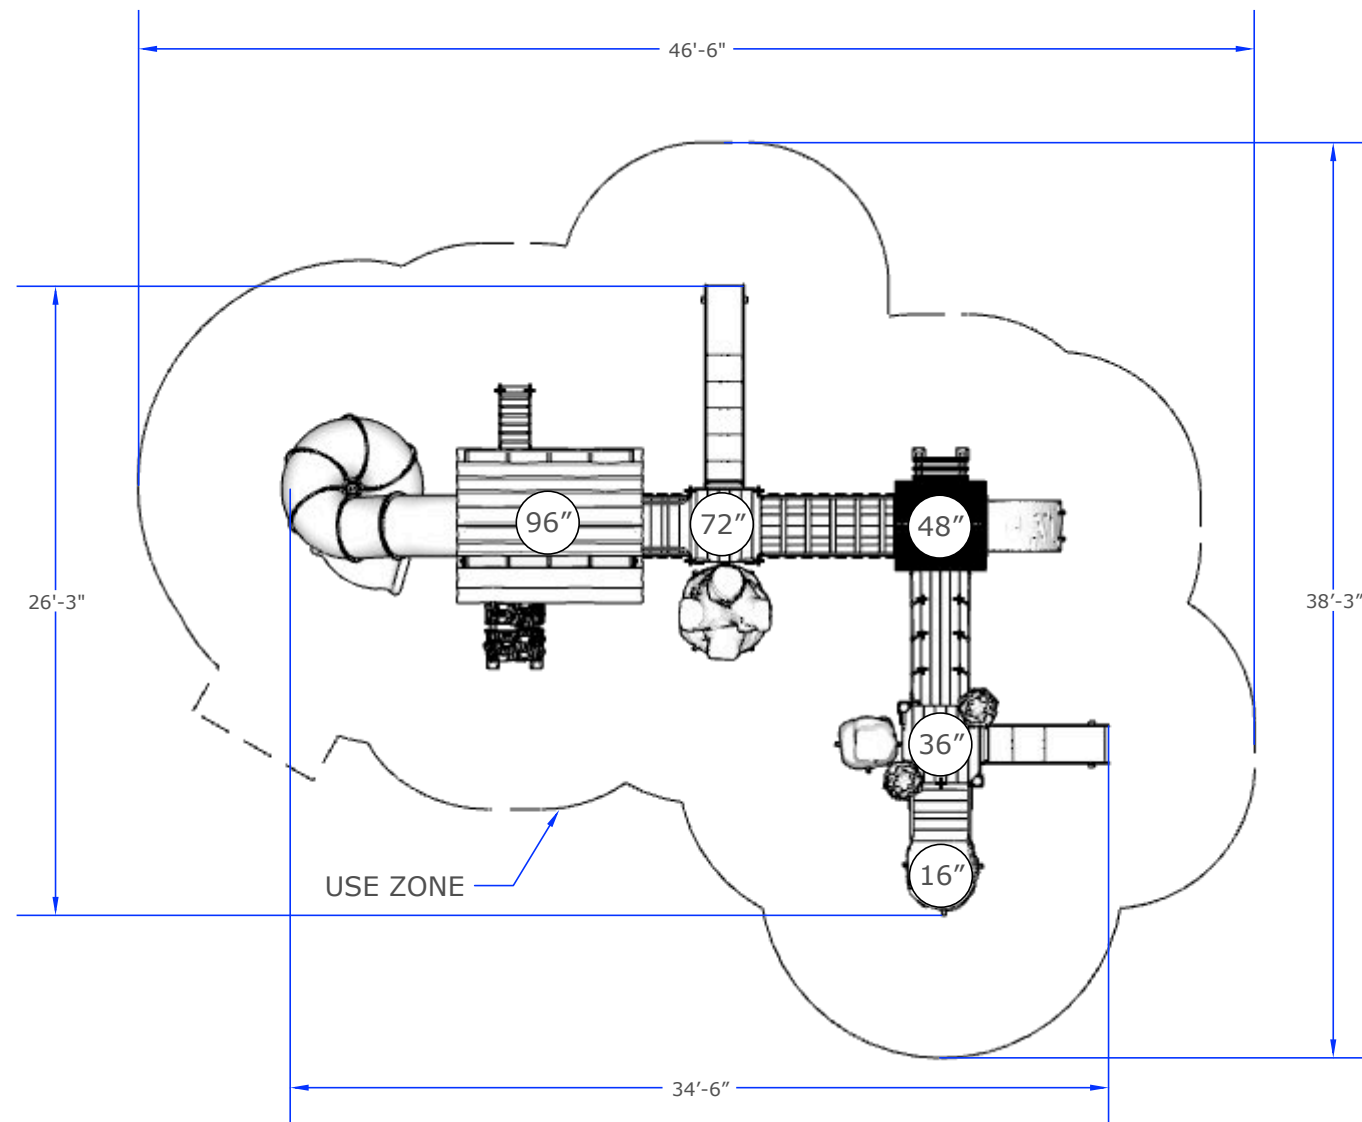

A
2 80007S-ADVENTUREVILLE
PLAN VIEW

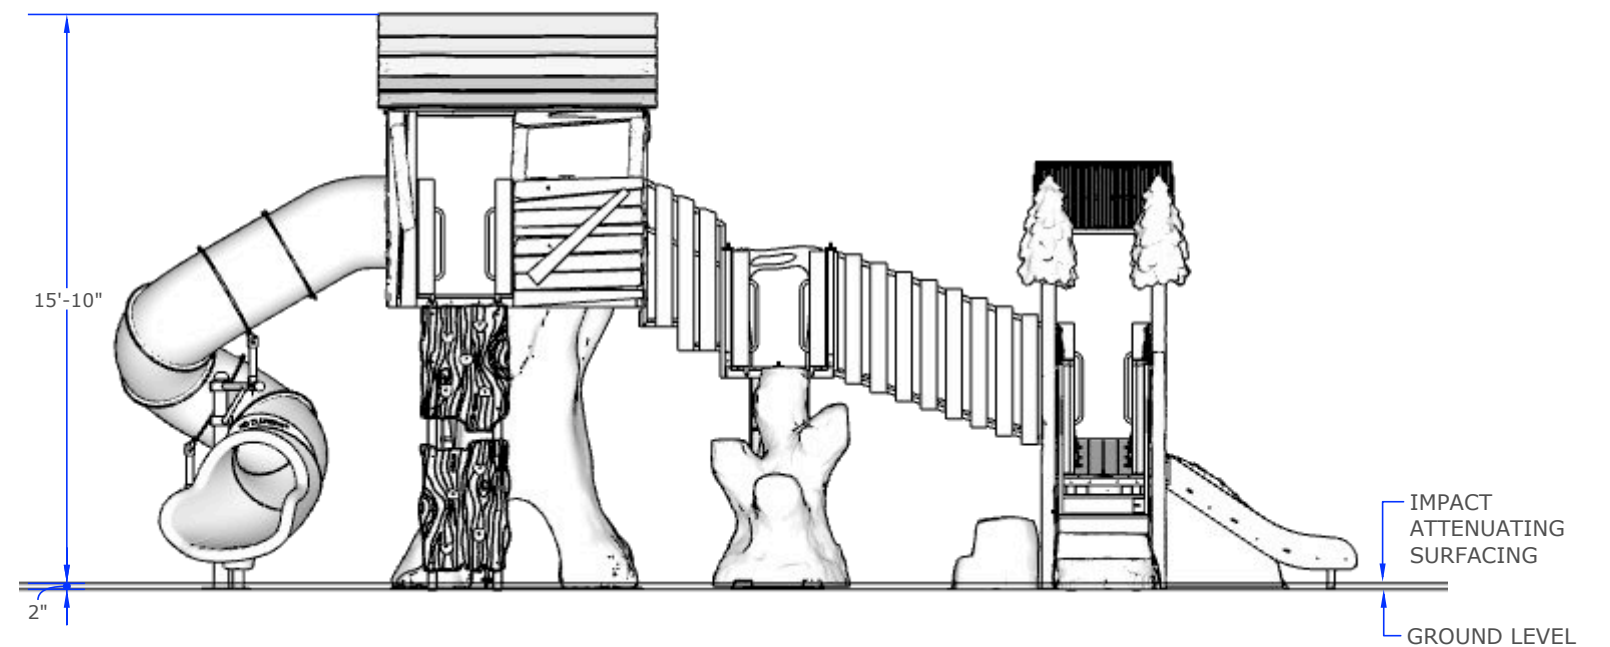


B
2 80007S-ADVENTUREVILLE
ELEVATION

Installation Notes:

- 1- Paved surfaces, such as asphalt and concrete, are NOT acceptable for use under your structure.
- 2- It is the consumer's responsibility to check with local utilities prior to excavating footings for any underground utility lines that may exist within the installation area.
- 3- It is the consumer's responsibility to check local soil conditions and drainage within the site area. Inquire with local contractors for appropriate recommendations.
- 4- Assemble the entire structure BEFORE anchoring to concrete unless instructed in the individual component installation instructions.
- 5- Read the installation instructions provided prior to beginning construction.
- 6- The complete area under and around your play structure must be covered with impact attenuating material.



4" THICK CONCRETE SLAB
TYPICAL (VERIFY FOR LOCAL CONDITIONS)
MIN 3,500 PSI CONCRETE WITH
6 X 6 WIRE MESH W2.9 X W2.9 W.W.F.
FLAT SHEETS, CENTERED IN THE SLAB
-OR-
FIBER REINFORCED CONCRETE MIX
EQUIVALENT IN STRENGTH TO
MIN 3,500 PSI CONCRETE WITH
6 X 6 WIRE MESH W2.9 X W2.9 W.W.F.
FLAT SHEETS, CENTERED IN THE SLAB
(BY OTHERS)


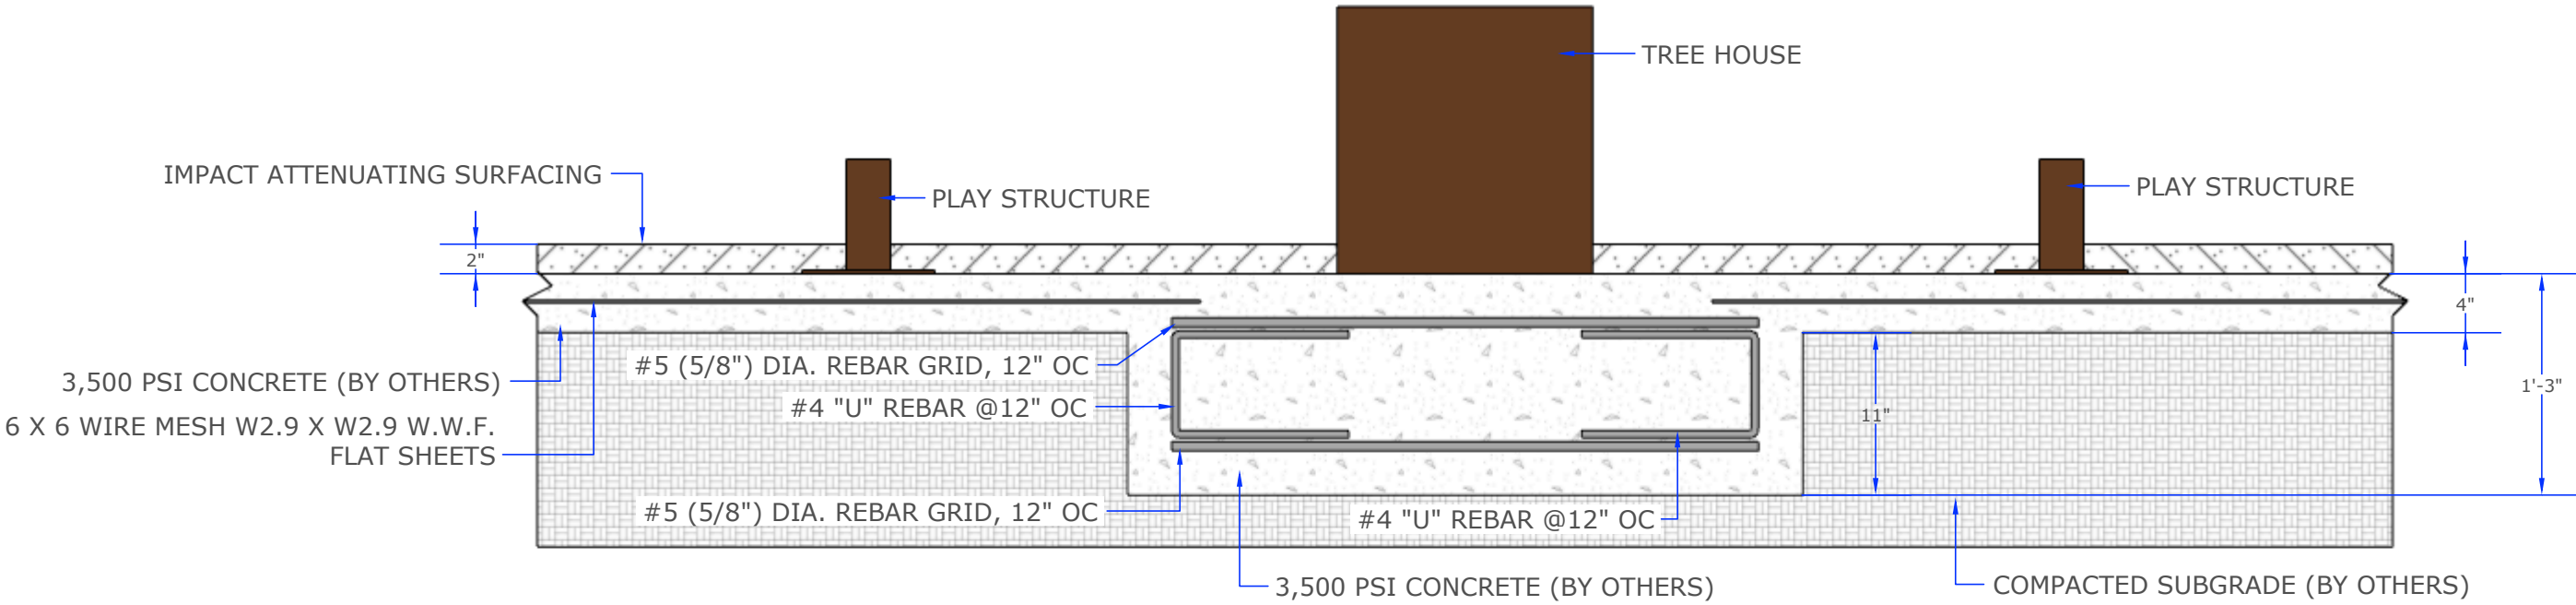


A
4 CONCRETE SLAB
SECTION

Concrete Slab Notes:

- 1- Concrete slabs shown in this document are recommendations based on historical performance in average soil conditions. Footing dimensions may be modified by owner based on actual soil conditions. Before changing slab dimensions, we strongly recommend the slabs be reviewed and approved by a registered engineer.
- 3- Assemble the entire play structure before anchoring it to the concrete unless instructed to do so in the individual play component.

= ASSEMBLY SEQUENCE

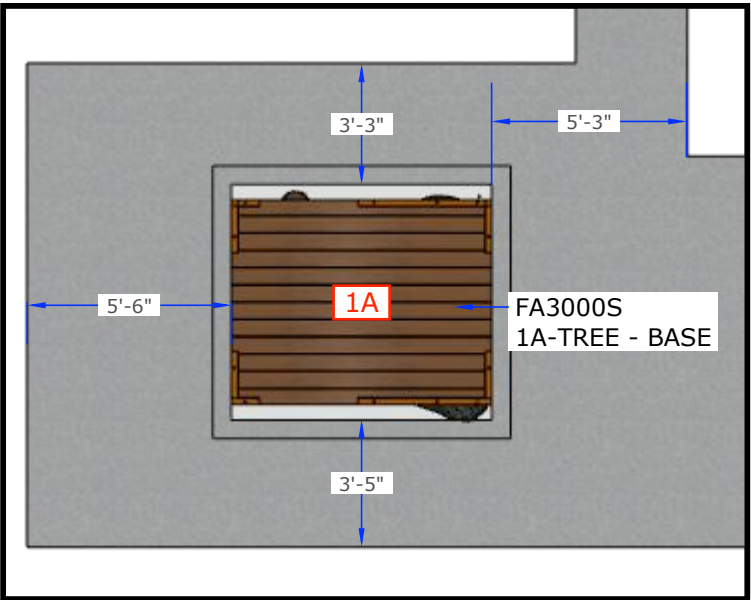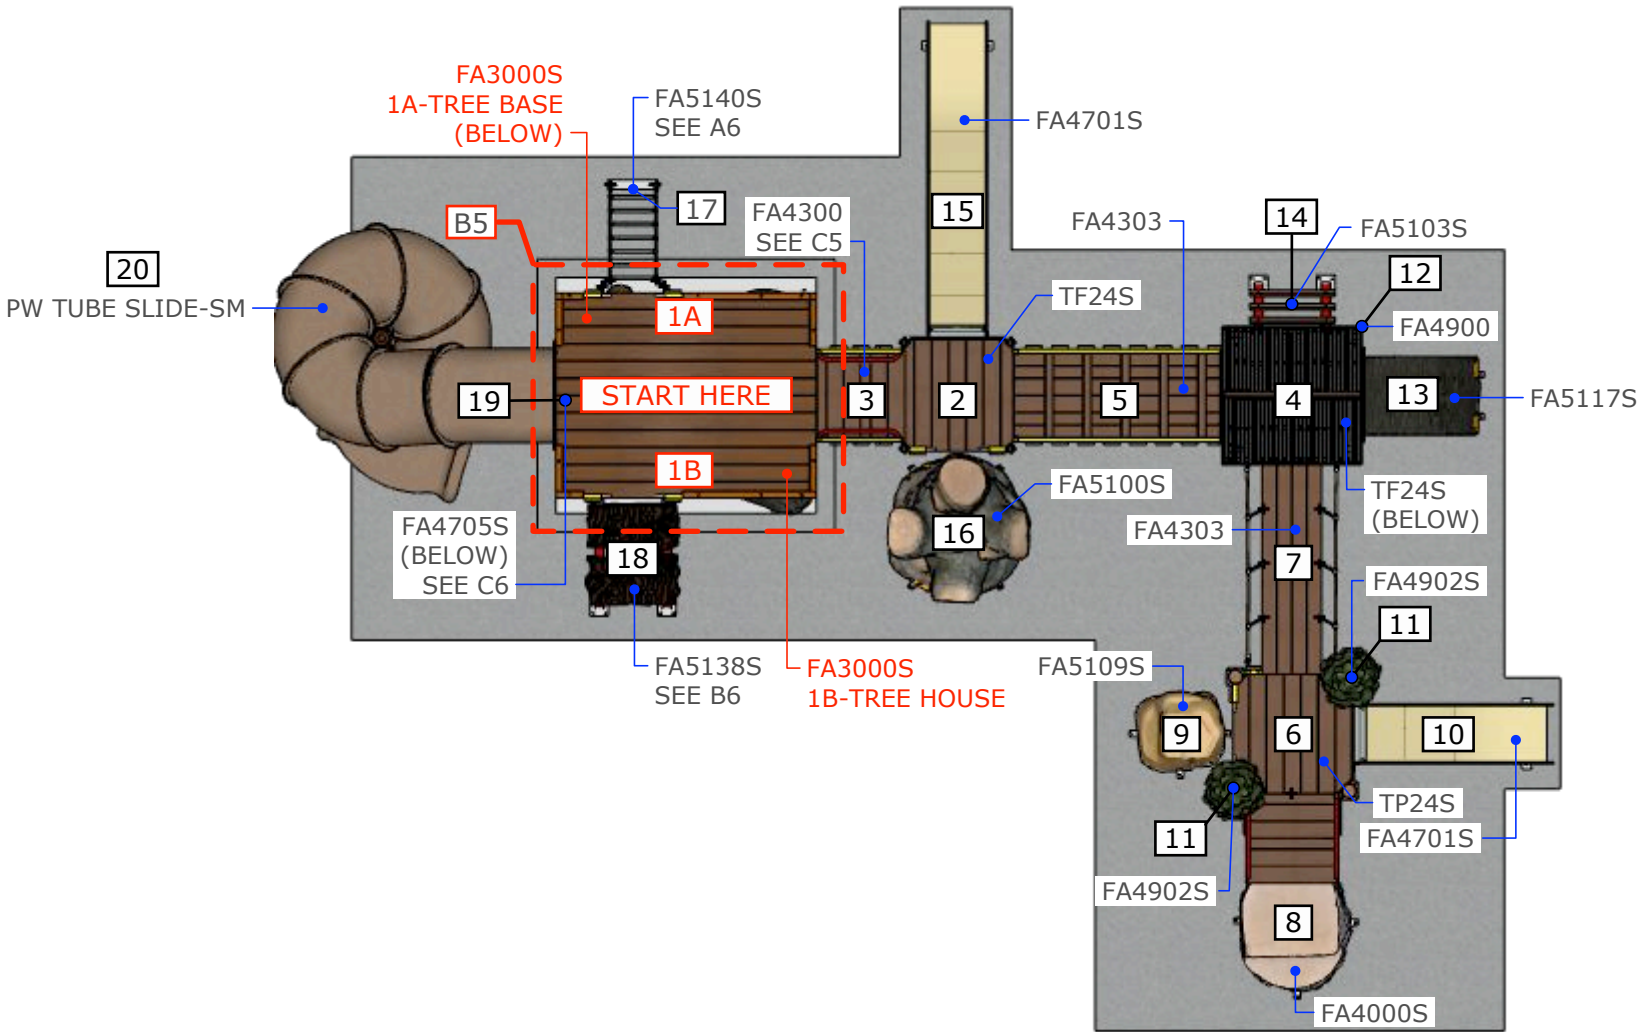

B 1A-TREE - BASE LOCATION
5 DETAIL

A 80007S-ADVENTUREVILLE
5 PLAN VIEW