


#	Part Number	Component	Install Number	Qua
A	TF72	Base-72 (Tree Fort)	TF24	1
B	TP48	Base-48 (Tree Fort)	TP24	1
C	FA3000	Tree House - 8'	FA3000	1
D	FA4004	Rock Transfer Platform - 4'	FA4003	1
E	FA4301	Accessible Step Link - 2' Rise	FA4300	1
F	FA4308	Timber Ridge Climber - 2' Rise	FA4303	1
G	FA4704	Stream Slide - 6'	FA4701	1
H	FA4710	Sectional Slide - 3' to 8'	FA4710	1
I	FA5106	Ladder Climber - 6'	FA5103	1
J	FA5110	Cargo Net Climber-4'	FA5110	1
K	FA5124	Log Pillar Climber-4'	FA5123	1
L	FA5138	Climbing Wall-8'	FA5134	1
M	FA5140	Rope Ladder - 8'	FA5126	1
N	ZZUN3402	Slide Section - Right	UN3412	3
O	ZZUN3401	Slide Section - Straight	UN3412	1
P	ZZUN3403	Slide Section - Left	UN3412	2
Q	ZZUN3412	3'-6" Slide Support	UN3412	1
R	ZZUN3414	5'-6" Slide Support	UN3412	1
S	VA3002	2-12 Age Plaque	Installed	1
T	FA4505L	Enclosure-15"-Left Hand	FA4505	5
U	FA4505R	Enclosure-15"-Right Hand	FA4505	5




WELCOME

This play equipment has been designed for kids ages **2-12 years**. Adult supervision is strongly recommended.

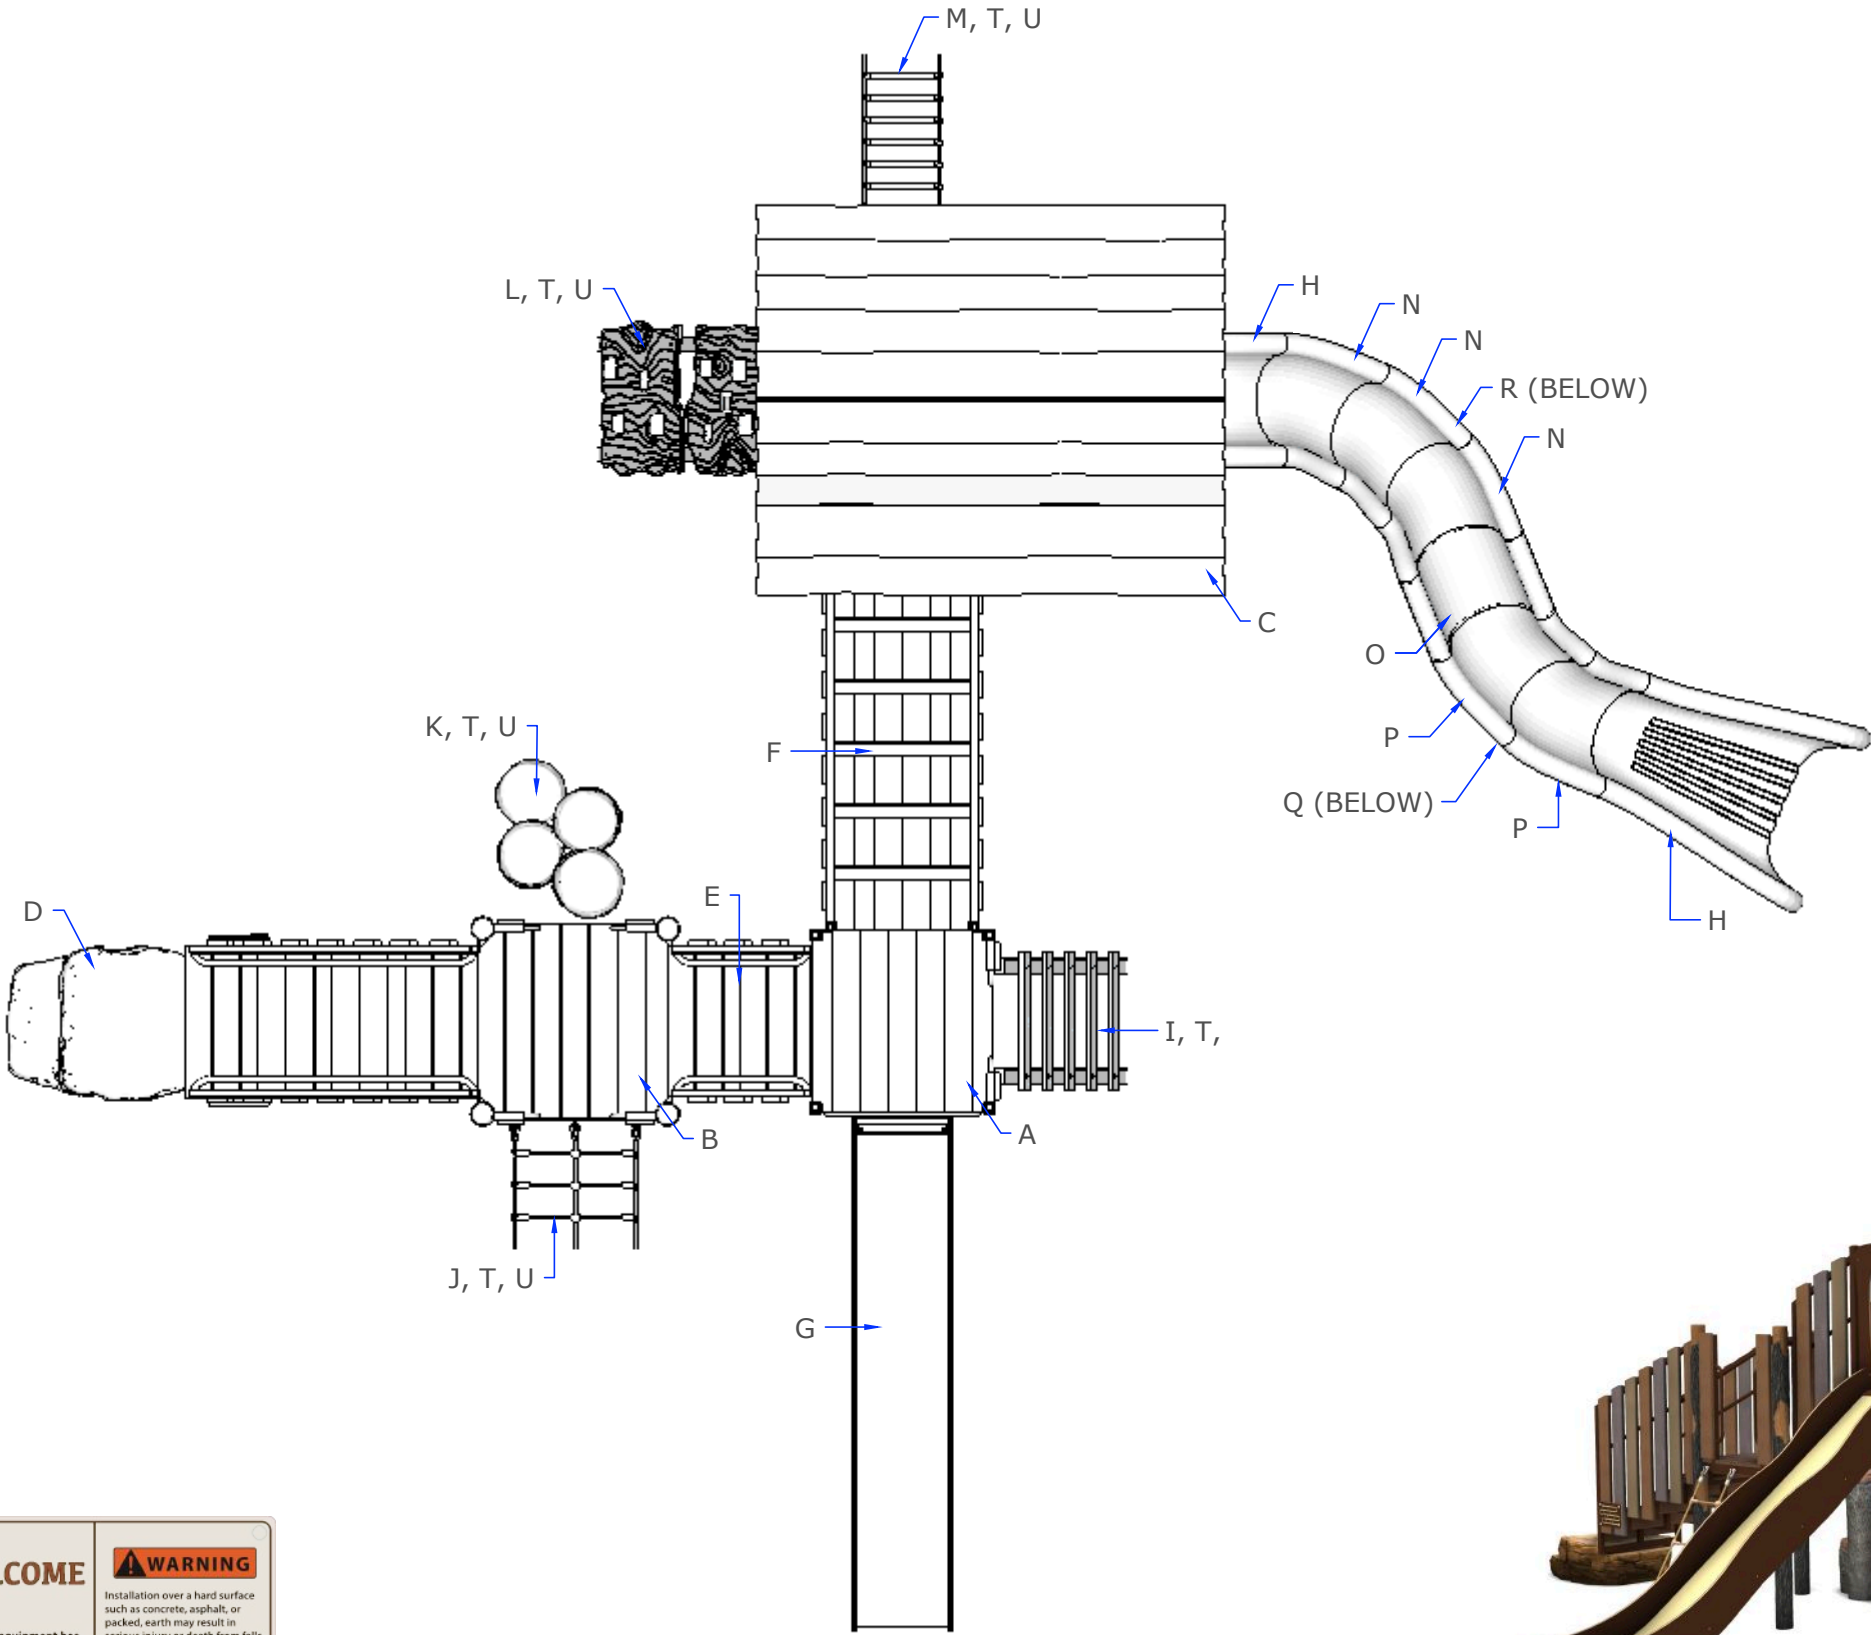


WARNING

Installation over a hard surface such as concrete, asphalt, or packed, earth may result in serious injury or death from falls. Drawstrings have entangled on slides and other playground equipment causing strangulation. REMOVE helmets, drawstrings, scarves, and other accessories around the neck prior to playing on the playground. Surfacing, and play surfaces may become HOT and cause burns. Check for hot surfaces prior to playing on the playground.

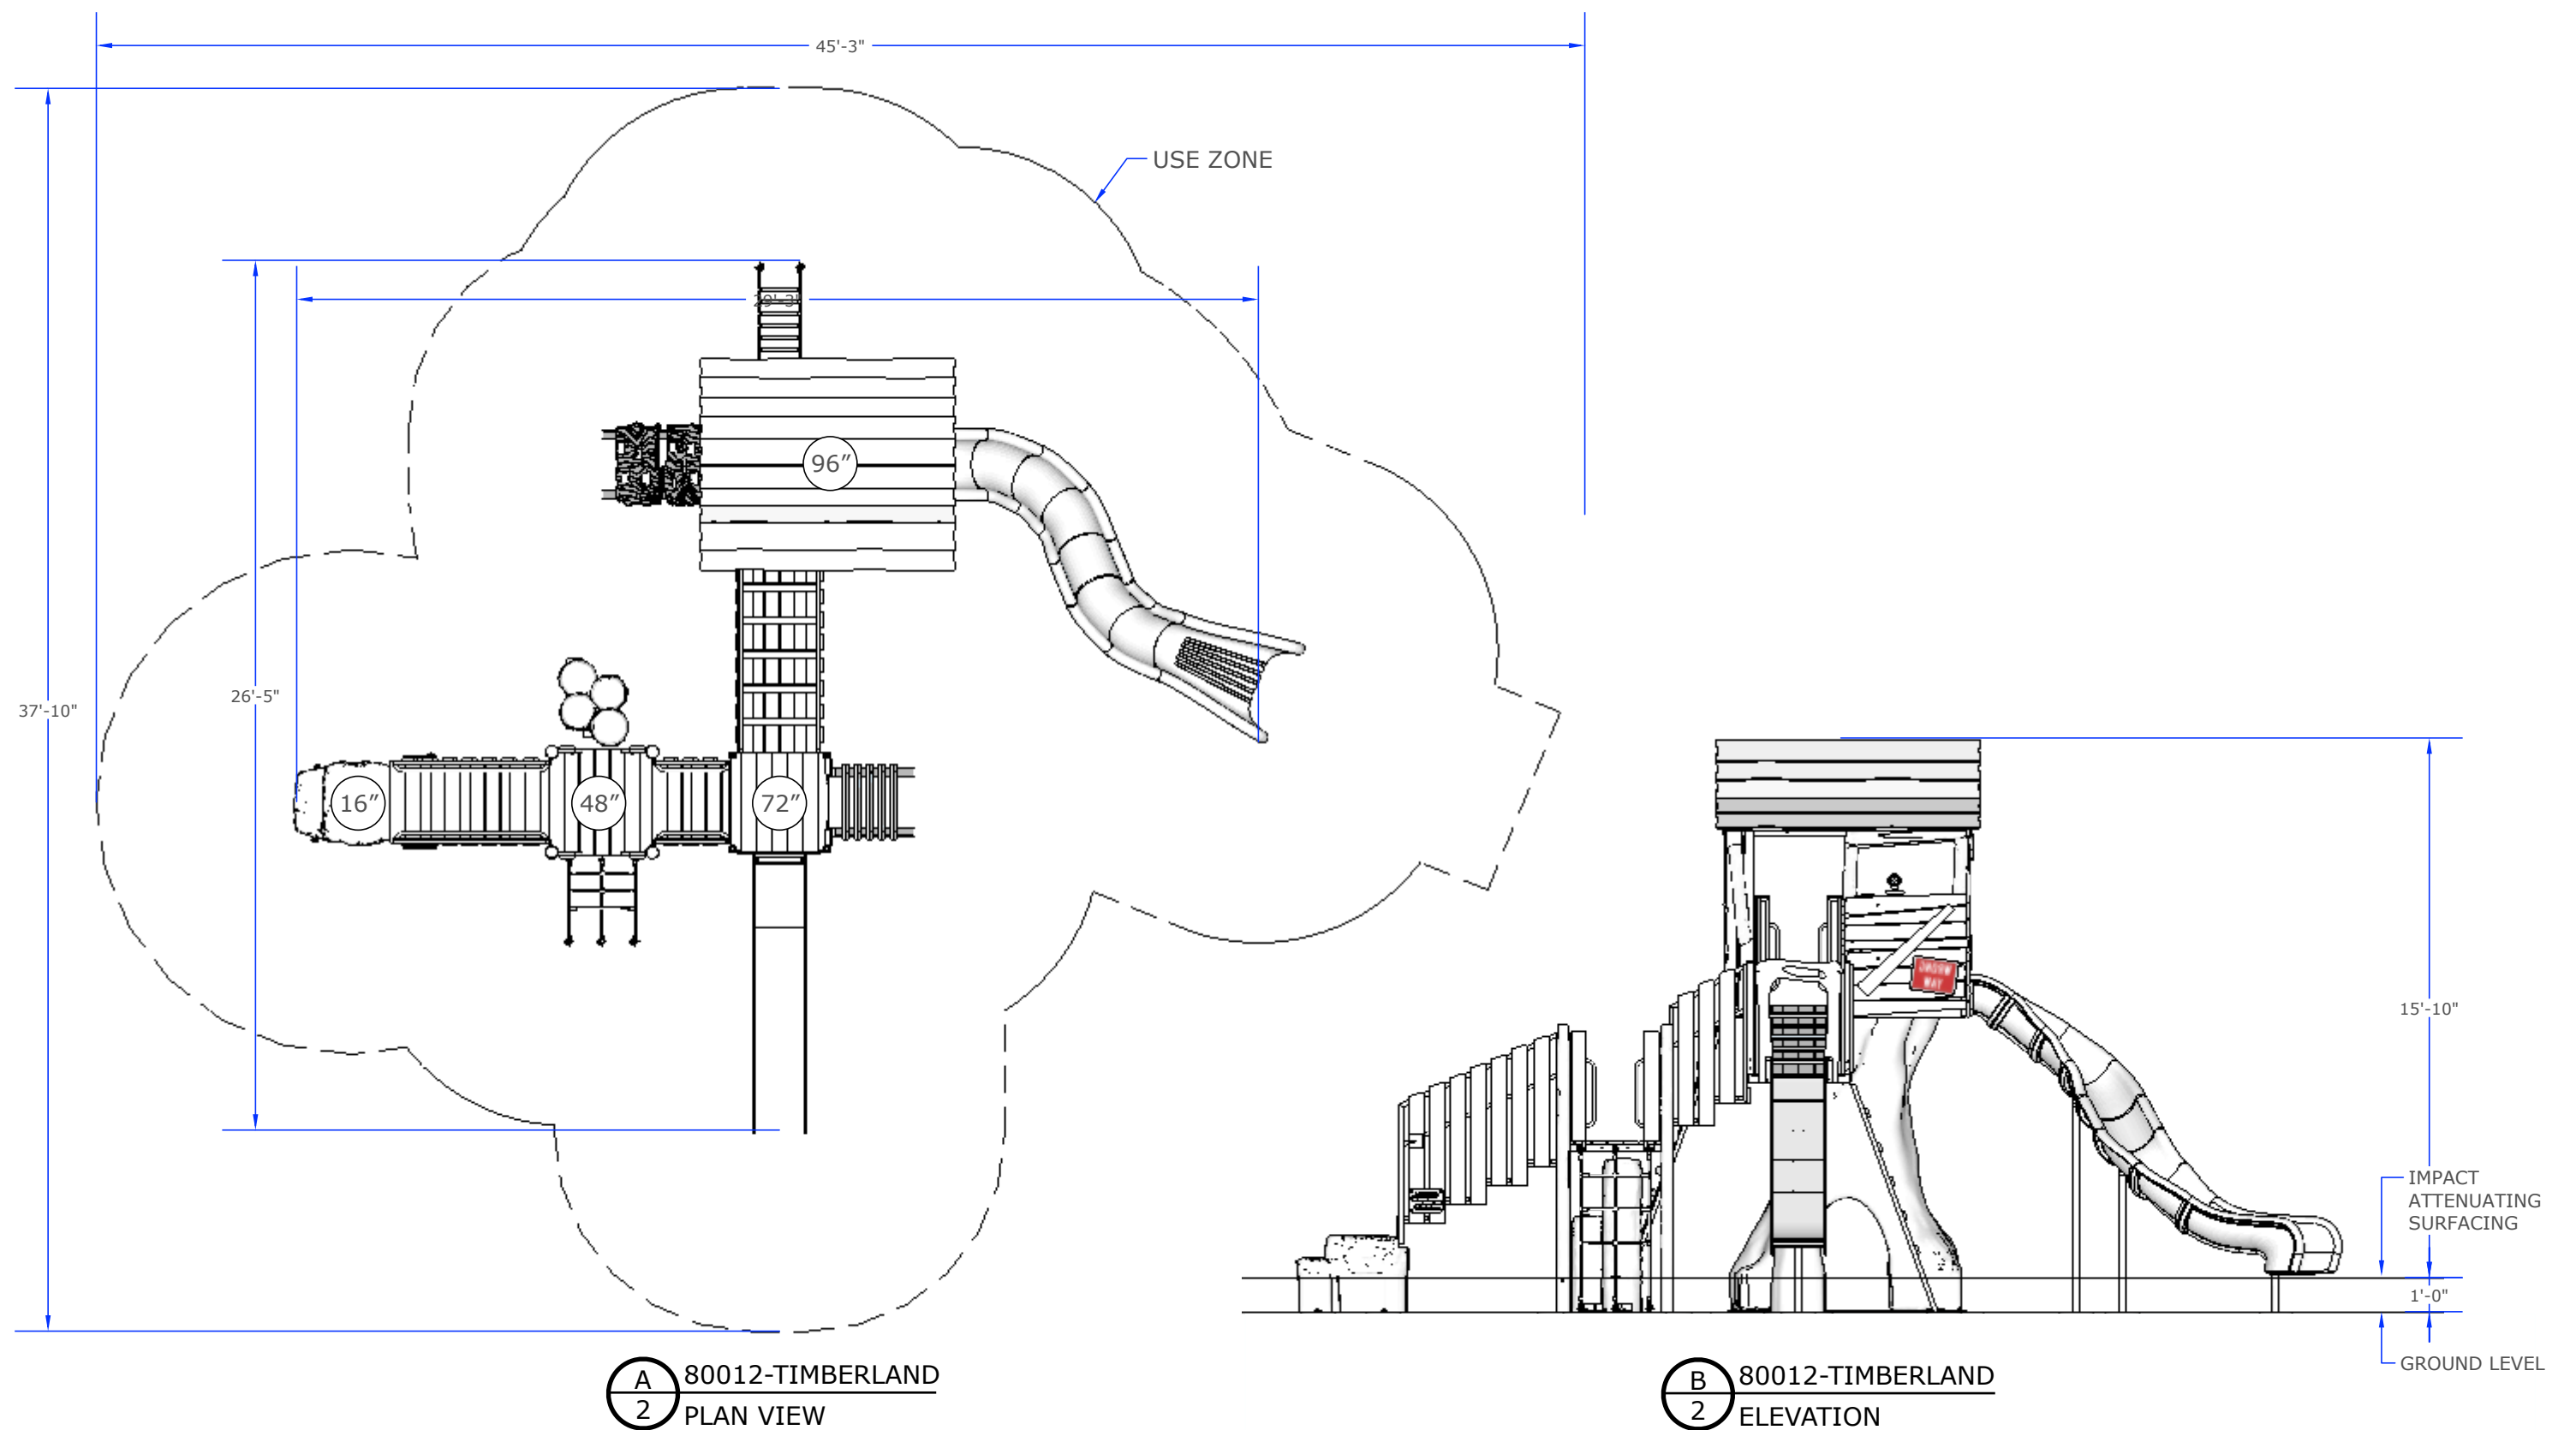


Installation Notes:

- 1- Paved surfaces, such as asphalt and concrete, are NOT acceptable for use under your structure.
- 2- It is the consumer's responsibility to check with local utilities prior to excavating footings for any underground utility lines that may exist within the installation area.
- 3- It is the consumer's responsibility to check local soil conditions and drainage within the site area. Inquire with local contractors for appropriate recommendations.
- 4- Assemble the entire structure BEFORE anchoring to concrete unless instructed in the individual component installation instructions.
- 5- Read the installation instructions provided prior to beginning construction.
- 6- The complete area under and around your play structure must be covered with impact attenuating material.

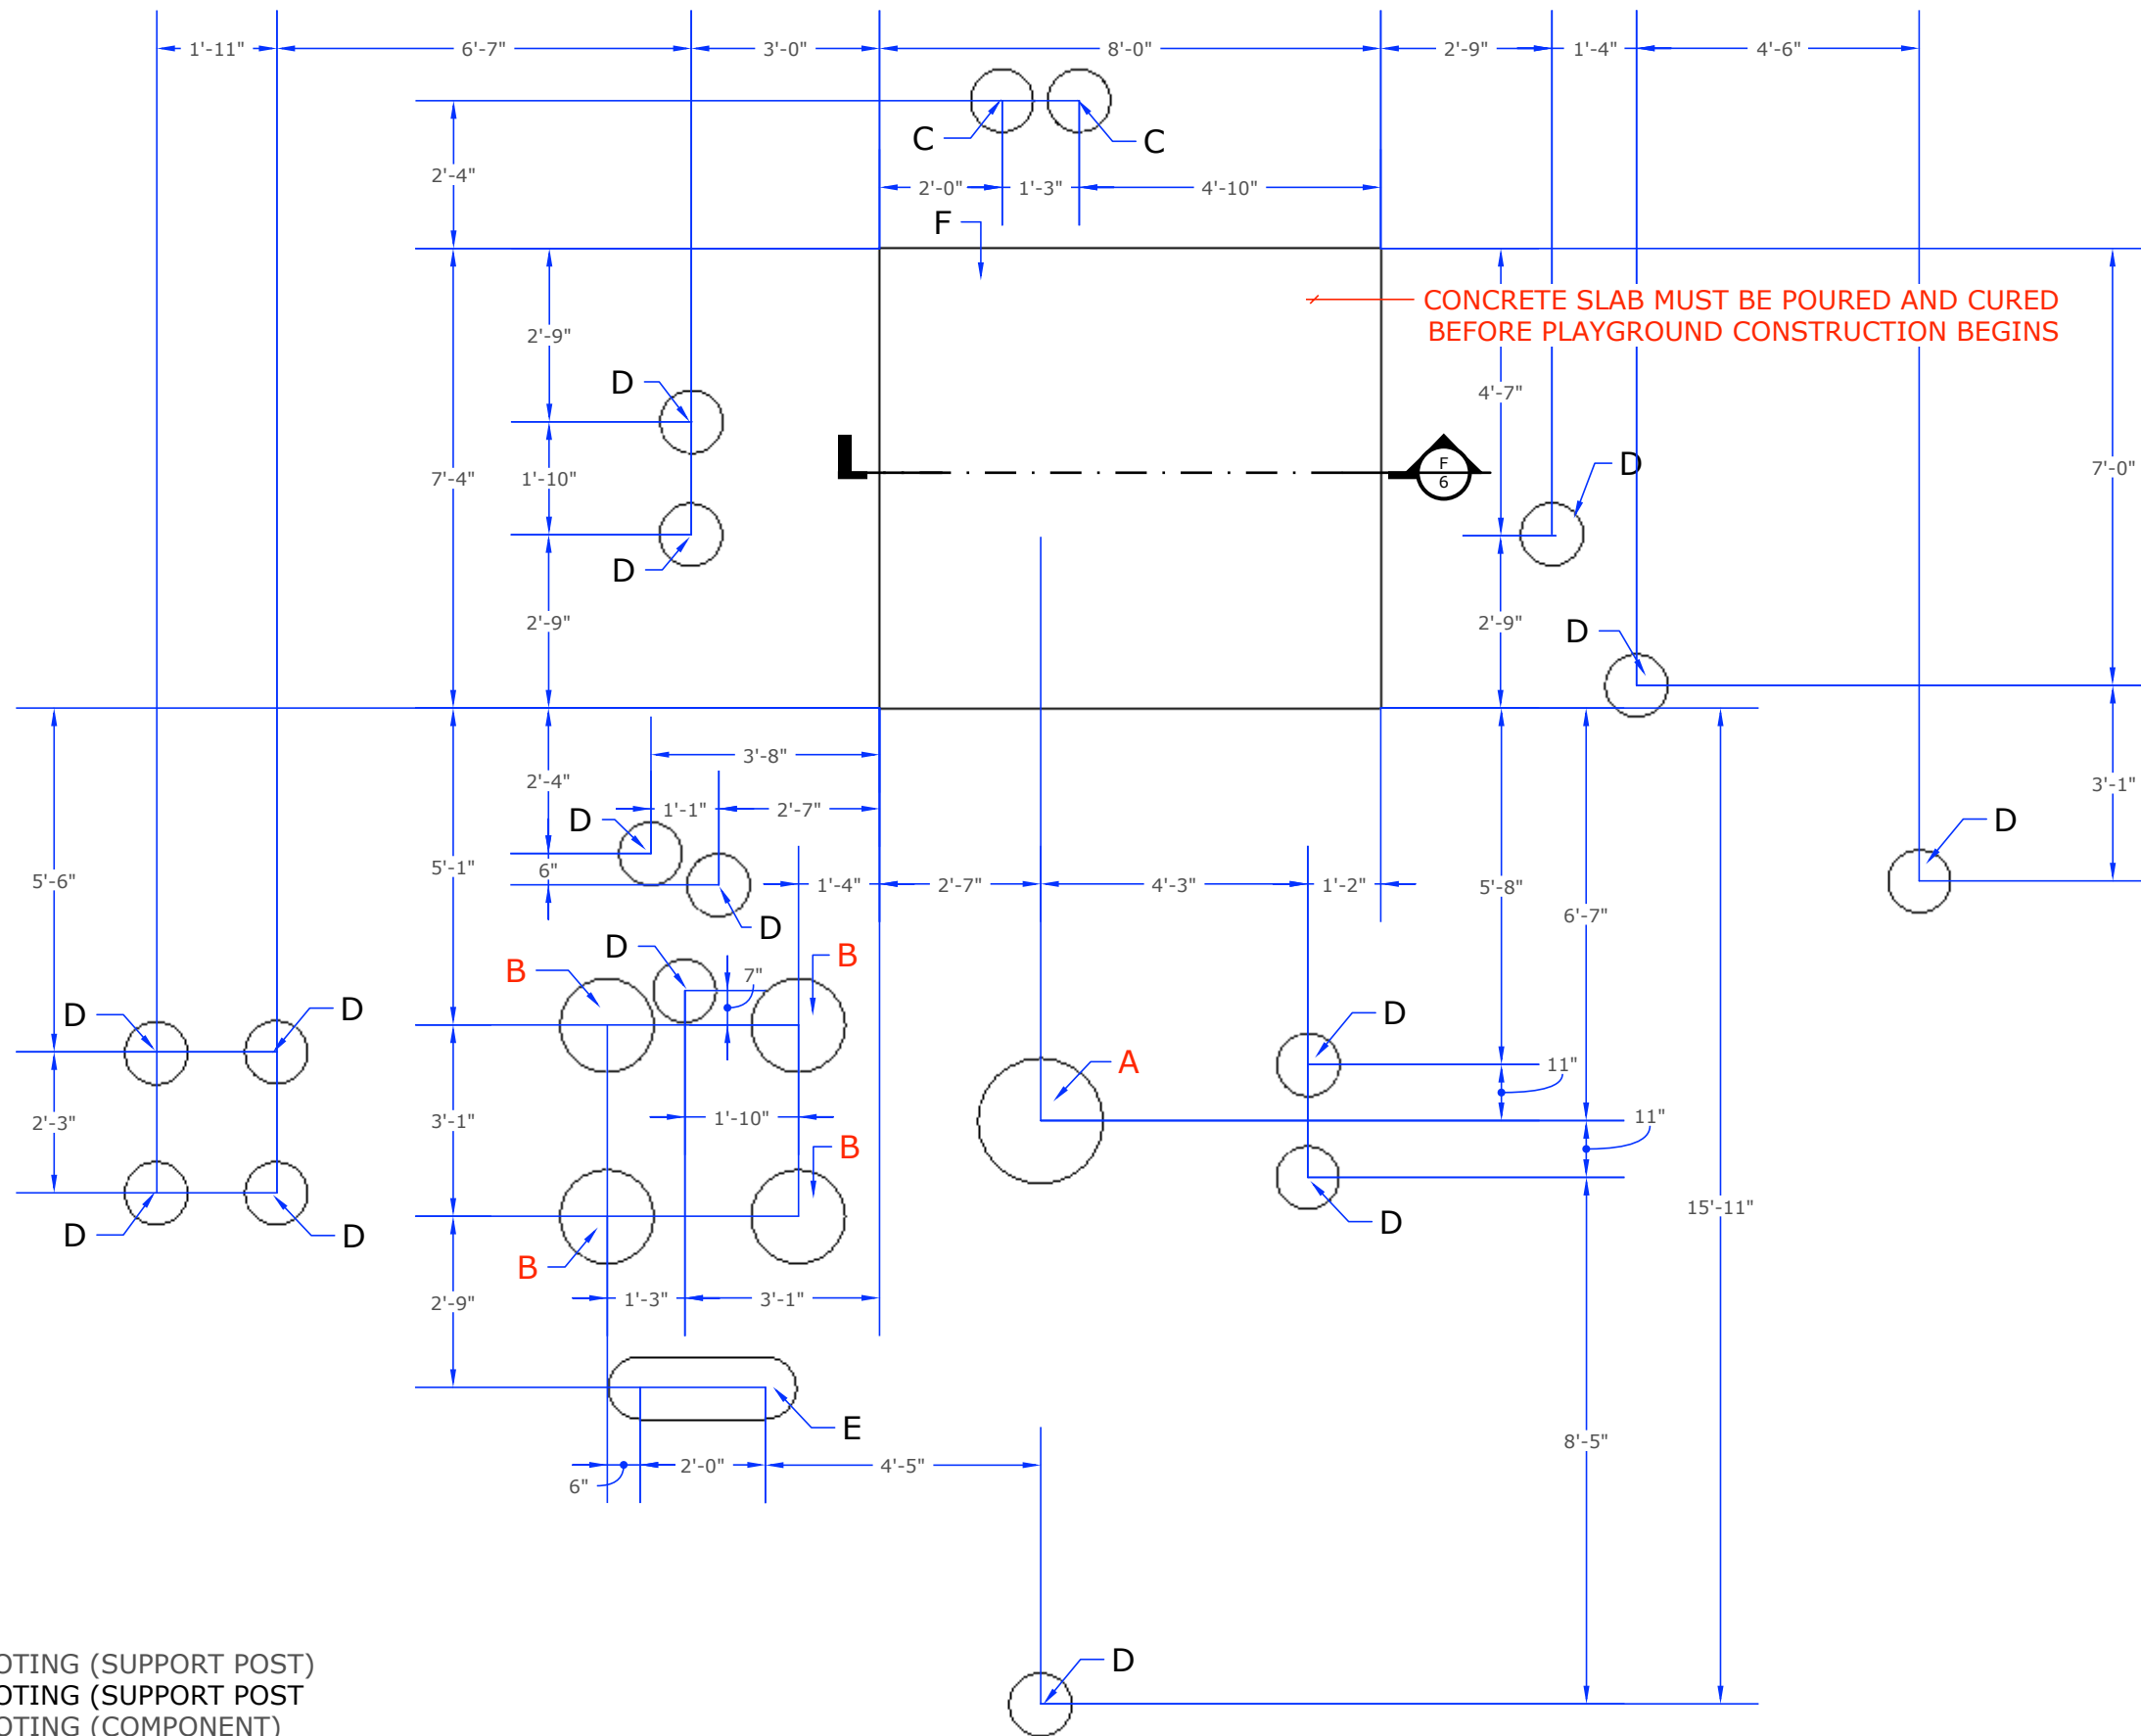


- A = 24" DIAMETER X 36" DEEP FOOTING (SUPPORT POST)
- B = 18" DIAMETER X 24" DEEP FOOTING (SUPPORT POST)
- C = 12" DIAMETER X 24" DEEP FOOTING (COMPONENT)
- D = 12" DIAMETER X 12" DEEP FOOTING (COMPONENT)
- E = 12" X 36" X 24" DEEP FOOTING (COMPONENT)
- F = 15" DEEP SLAB (SEE PAGE 6)


A
3
CONCRETE FOOTERS
 PLAN VIEW

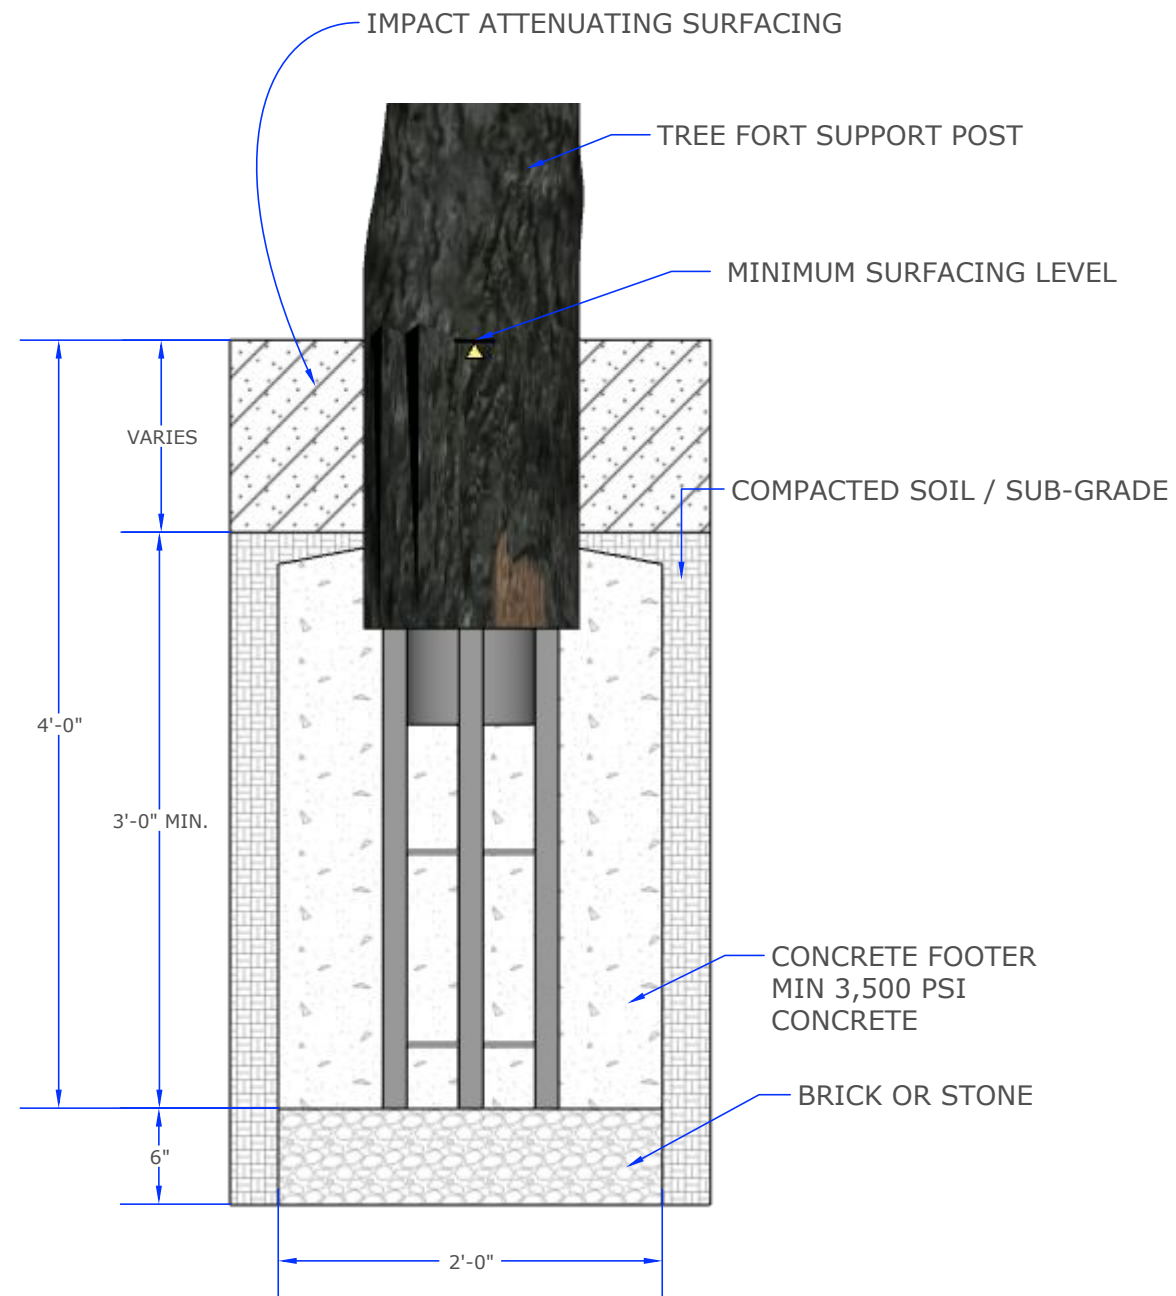

A CONCRETE FOOTING SECTION
SECTION-ELEVATION

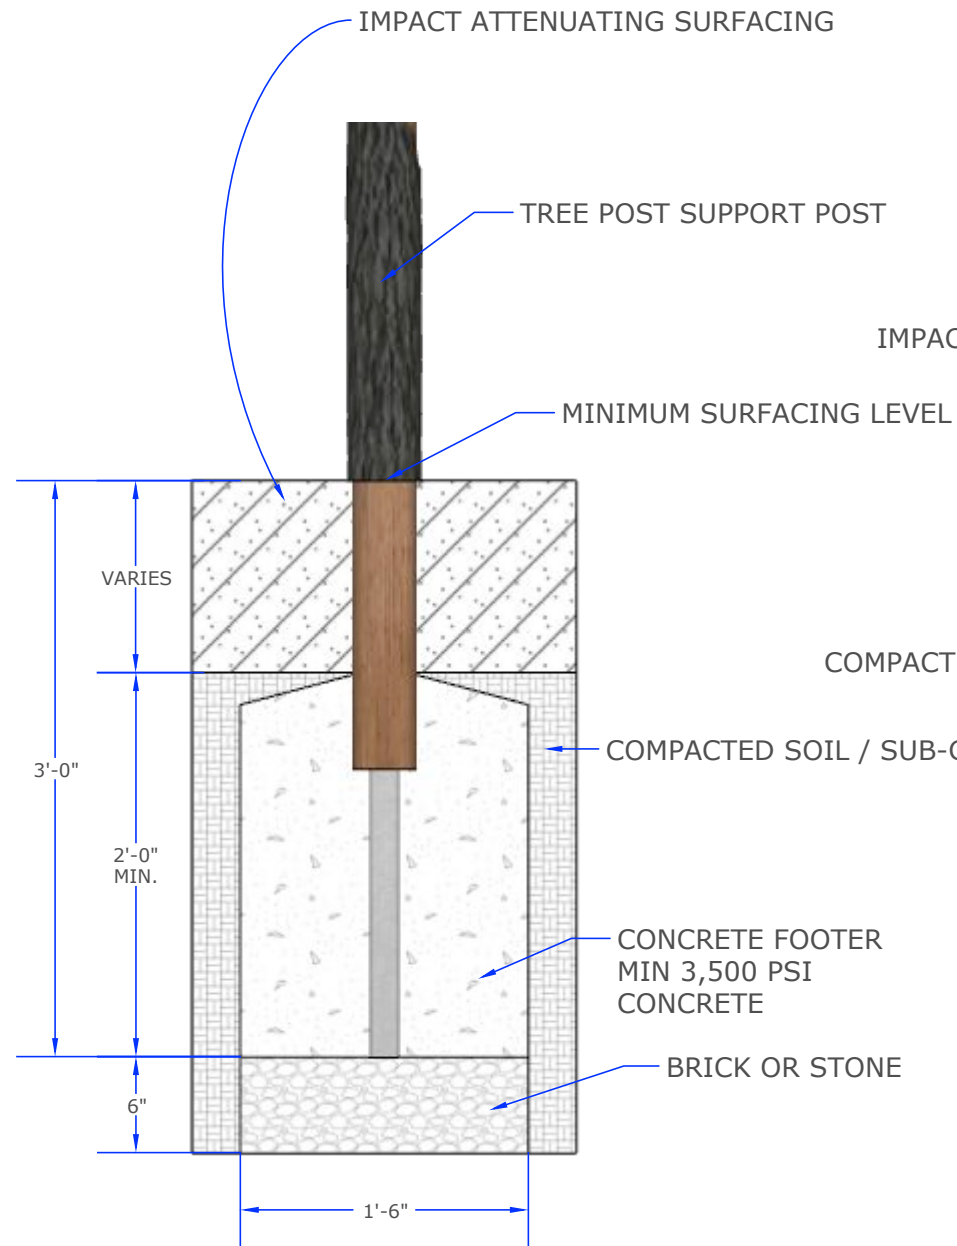


B CONCRETE FOOTING SECTION
SECTION-ELEVATION

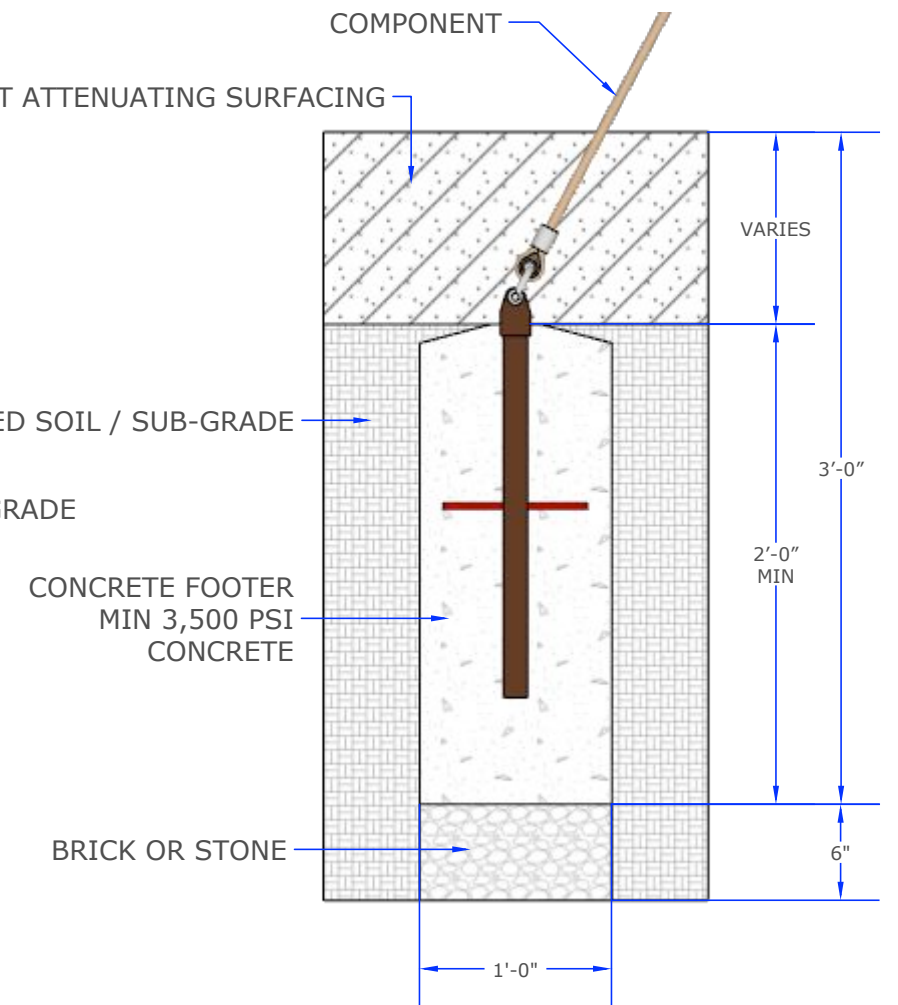


C CONCRETE FOOTING SECTION
SECTION-ELEVATION

Footing Notes:

- 1- Do not encase the bottom of the support post in concrete. Place the post directly on packed stone or brick.
- 2- The footings shown in this document are recommendations based on historical performance in average soil conditions. Footing dimensions may be modified by owner based on actual soil conditions. Before changing footing dimensions, we strongly recommend the footings be reviewed and approved by a registered engineer.
- 3- The base of the footings must be below the frost line.
- 4- Assemble the entire play structure before pouring concrete unless instructed to do so in the individual play component.

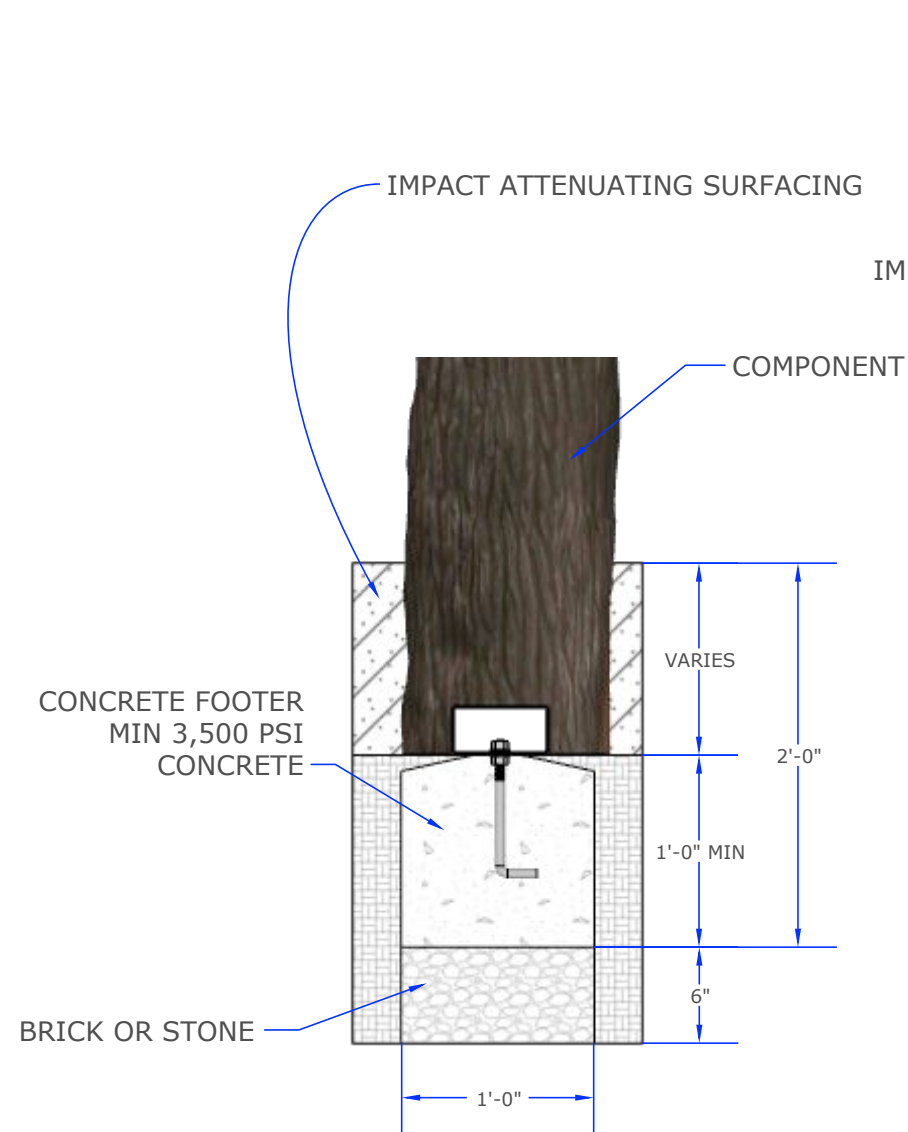


D CONCRETE FOOTING SECTION
SECTION-ELEVATION

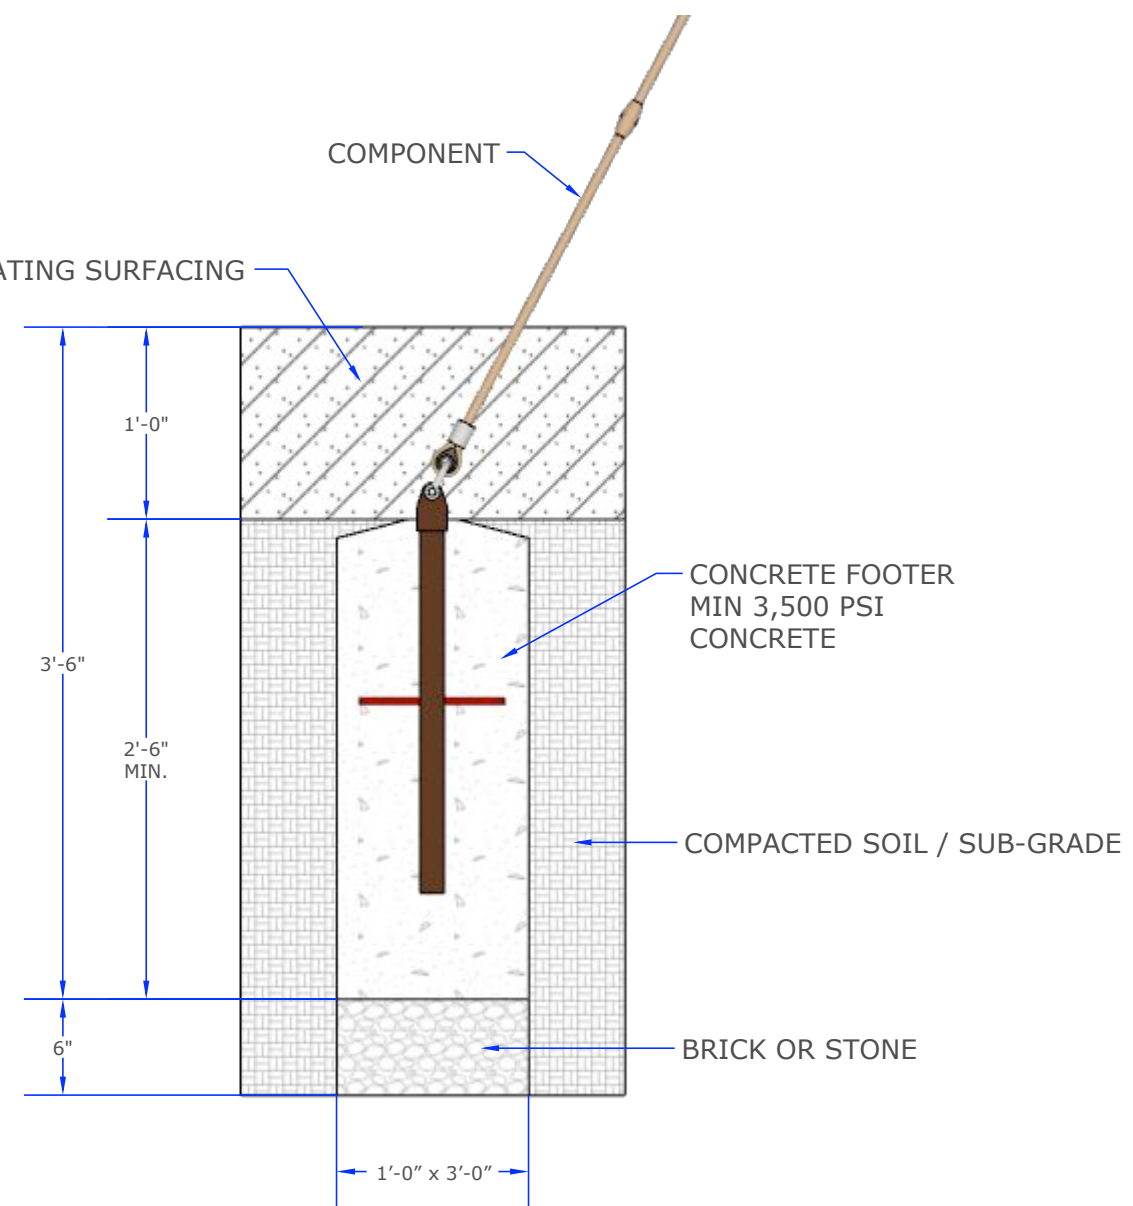

E CONCRETE FOOTING SECTION
SECTION-ELEVATION

Footing Notes:

- 1- Do not encase the bottom of the support post in concrete. Place the post directly on packed stone or brick.
- 2- The footings shown in this document are recommendations based on historical performance in average soil conditions. Footing dimensions may be modified by owner based on actual soil conditions. Before changing footing dimensions, we strongly recommend the footings be reviewed and approved by a registered engineer.
- 3- The base of the footings must be below the frost line.
- 4- Assemble the entire play structure before pouring concrete unless instructed to do so in the individual play component.

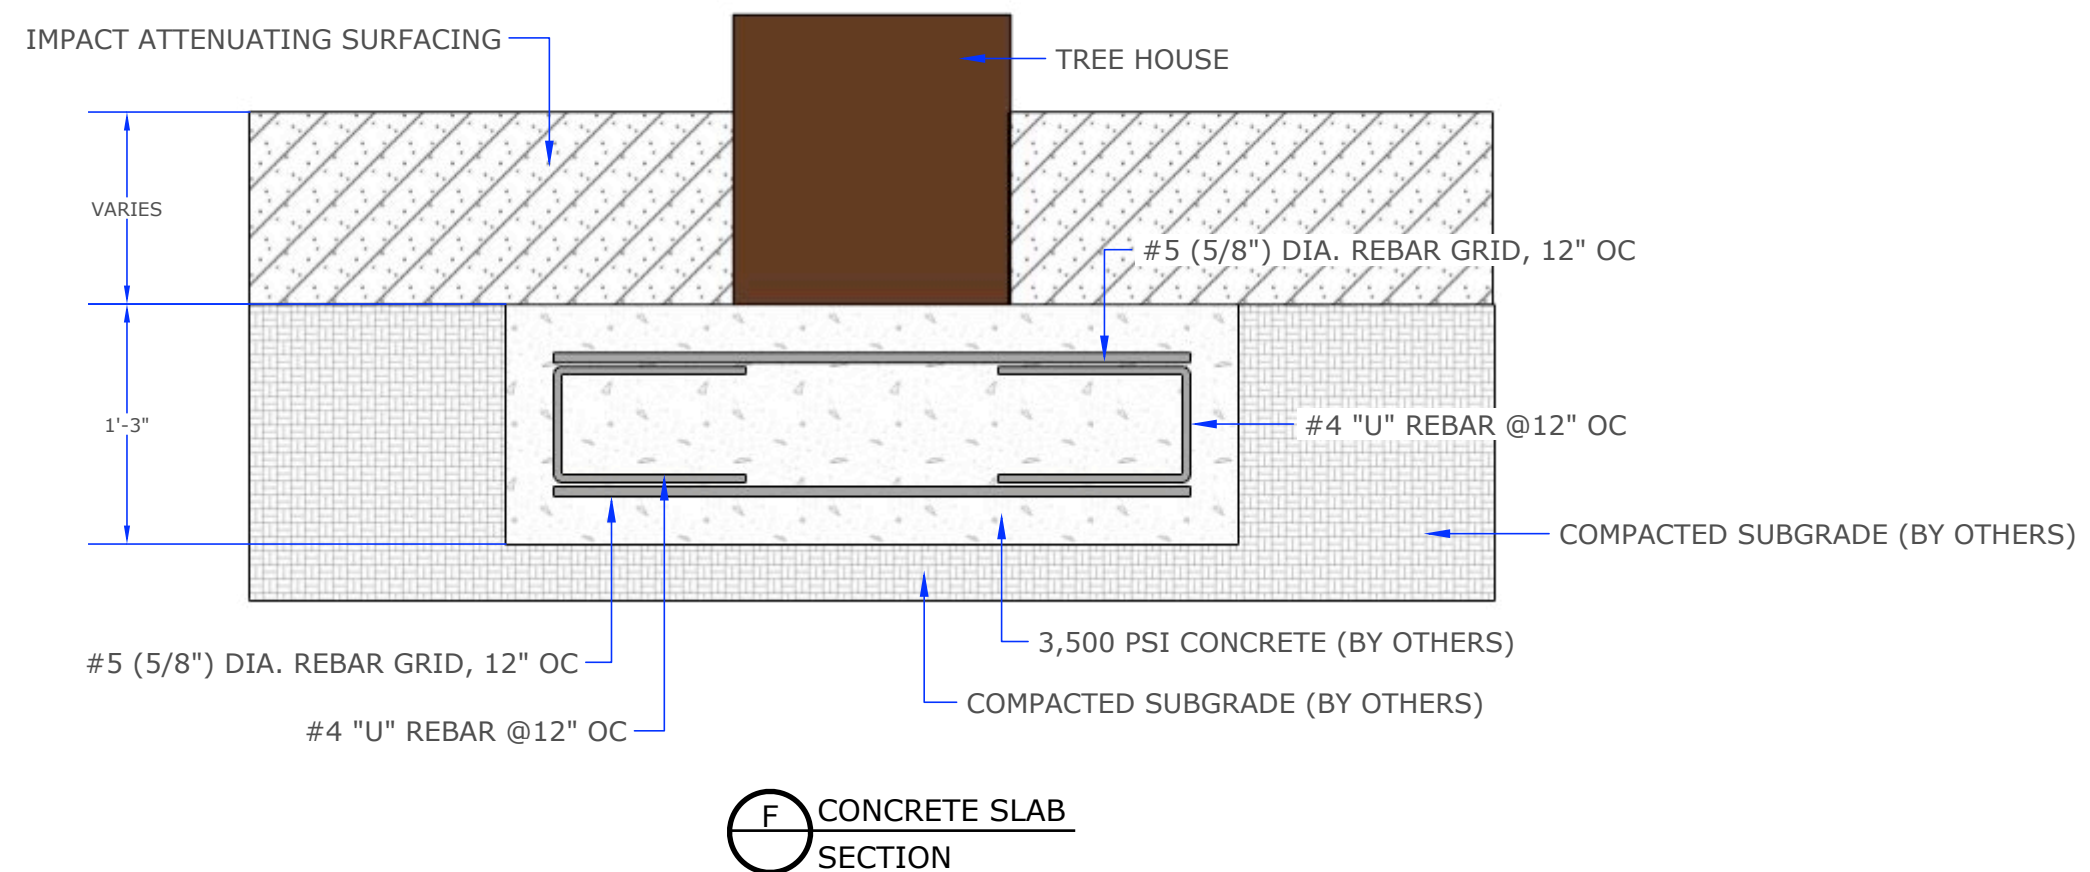

Concrete Slab Notes:

- 1- Concrete slabs shown in this document are recommendations based on historical performance in average soil conditions. Footing dimensions may be modified by owner based on actual soil conditions. Before changing slab dimensions, we strongly recommend the slabs be reviewed and approved by a registered engineer.
- 3- Assemble the entire play structure before anchoring it to the concrete unless instructed to do so in the individual play component.