







FA4604
L: 2' 10"
W: 2' 7"
H: 0' 3/4"
18 LBS

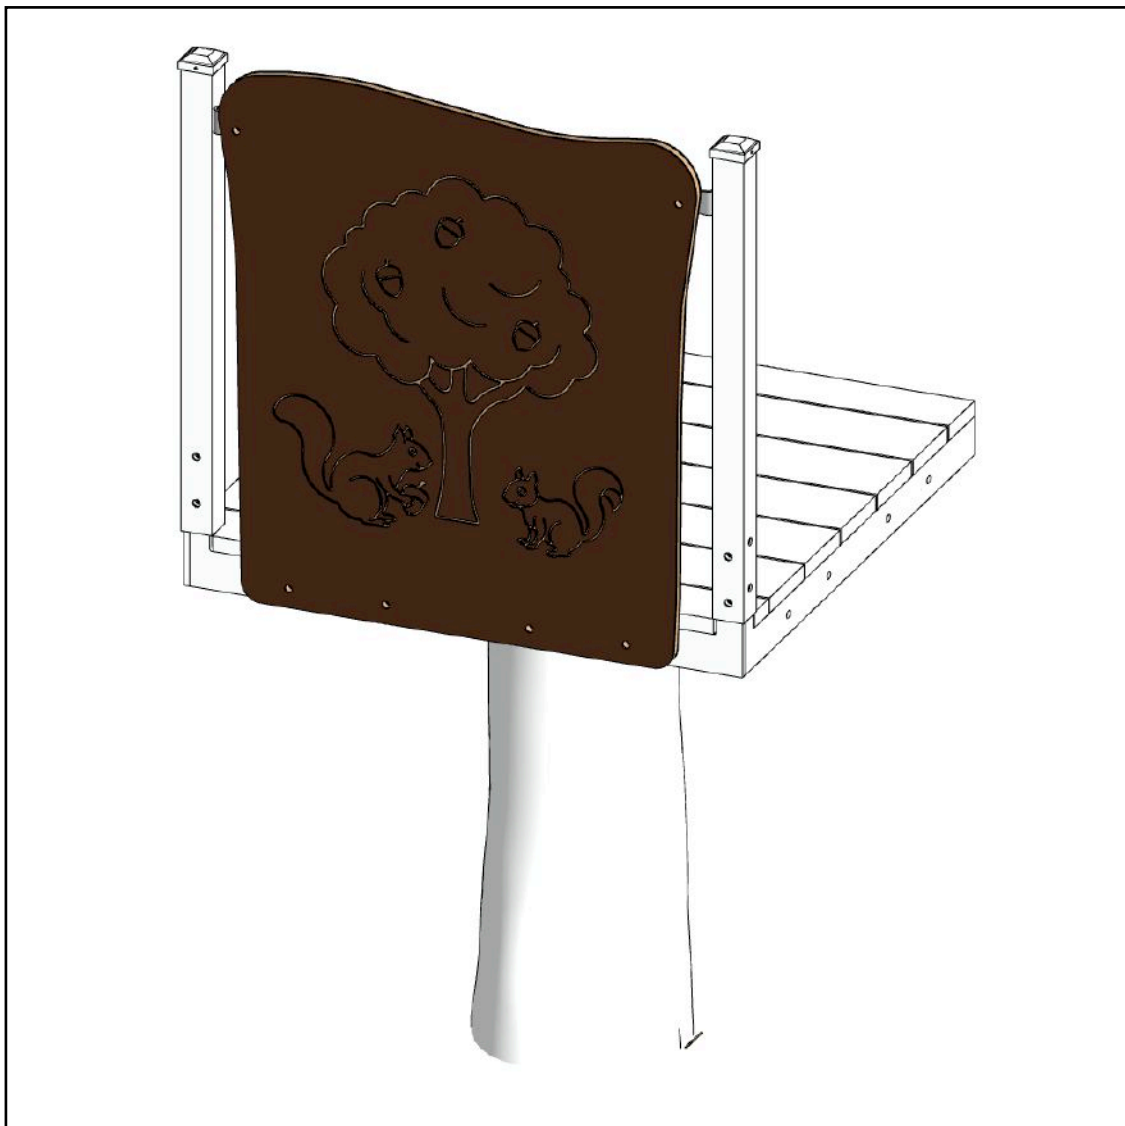


VP1015 Panel
Brackets (x2)

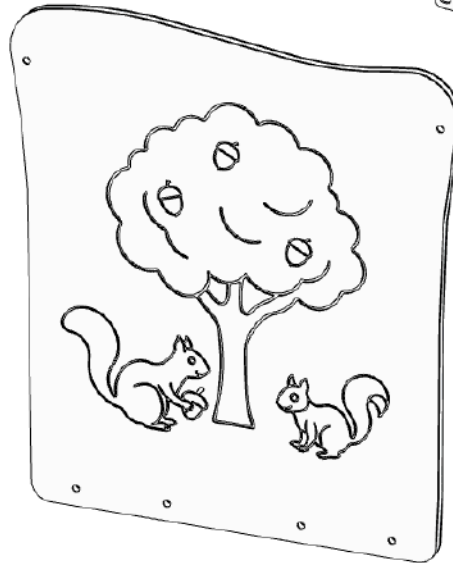

FA4604 (2-5)
Acorn Maze Panel

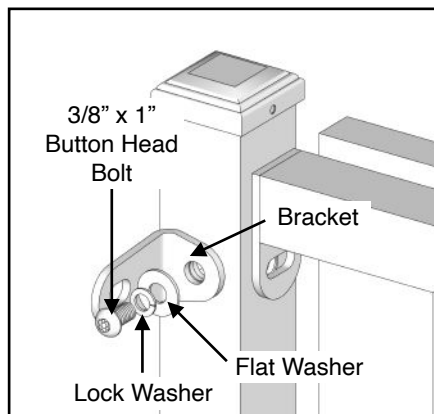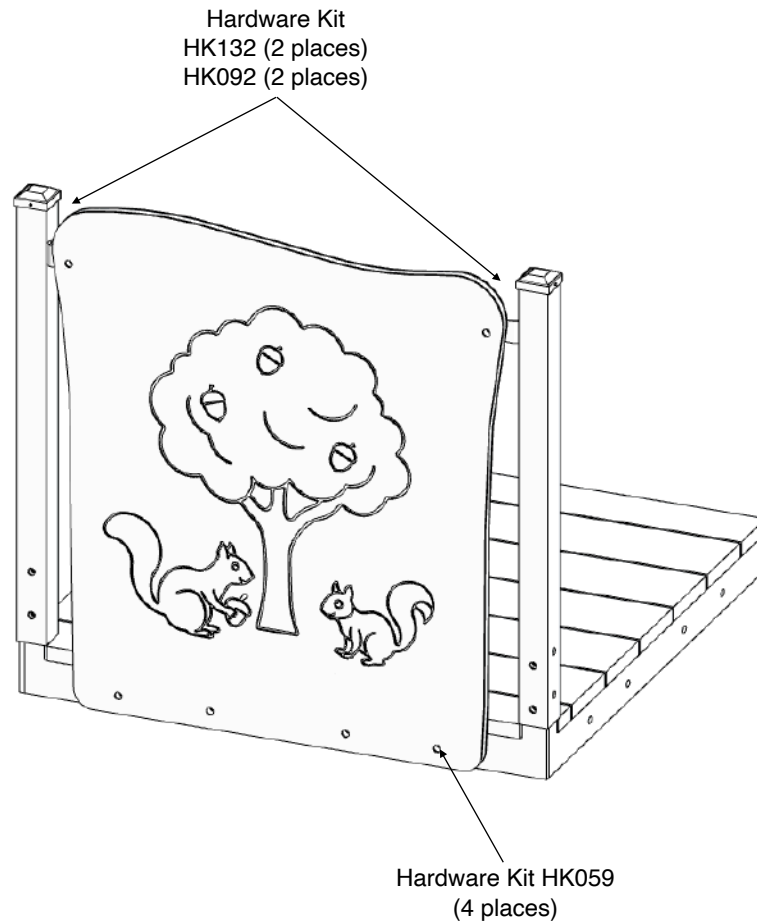

Hardware Detail HK132

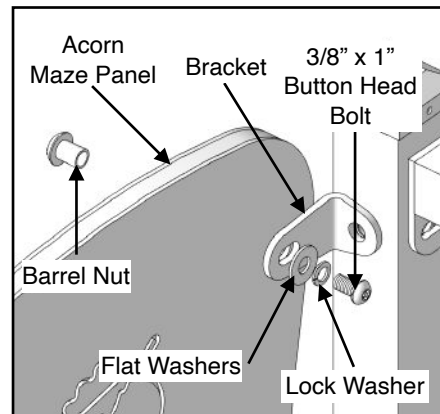

Hardware Detail HK092


NOTE: Read installation instructions thoroughly before starting installation process.

Step 1: Review the concrete plan and details specific to your site before installation begins.

Step 2: Bolt the VP1015 brackets to the posts using hardware kit HK132 (2 places).

Step 3: Place the Acorn Maze panel into its location. Bolt the panel to the deck using hardware kit HK059 (4 places).

Step 4: Bolt the VP1015 brackets to the Acorn Maze panel using hardware kit HK092 (2 places).

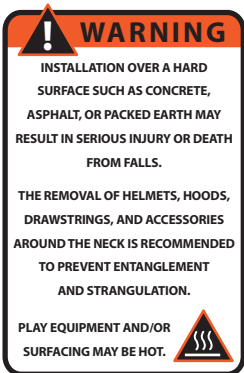

NOTES PRIOR TO CONSTRUCTION:

- Use appropriate equipment to lift and move the play equipment.
- Check local codes and requirements prior to digging or installing any equipment.

NOTE: Always wear eye protection appropriate to the task at hand.

Use thread lock on all fasteners.
Cut bolt ends off with more than 2 exposed threads.

Included Items:

Part #	Item	Description	Quantity
FA4009 (2-5)	Acorn Maze Panel	Play Equipment	1
HK132	HDW-44	3/8" x 1" Button Head Torx Pin-in Bolt, SS	2
HK132	HDW-15	3/8" Split Lock Washer, SS	2
HK132	HDW-25	3/8" Small Flat Washer, SS	2
HK132	VP1015	VP1015 Panel Bracket	2
HK059	HDW-10	3/8" x 1 3/4" Button Head Torx Pin-in Bolt, SS	4
HK059	HDW-15	3/8" Split Lock Washer, SS	4
HK059	HDW-25	3/8" Small Flat Washer, SS	8
HK059	HDW-38	3/8" Nylock Nut, SS	4
HK092	HDW-44	3/8" x 1" Button Head Torx Pin-in Bolt, SS	2
HK092	HDW-15	3/8" Split Lock Washer, SS	2
HK092	HDW-25	3/8" Small Flat Washer, SS	2
HK092	HDW-38	3/8" x 11/16" Barrel Nut, SS	2

Use thread lock on all fasteners.
Cut bolt ends off with more than 2 exposed threads.