





DOES NOT INCLUDE SURFACING MOUND ONLY
(Appx. 200 square feet of surfacing required)

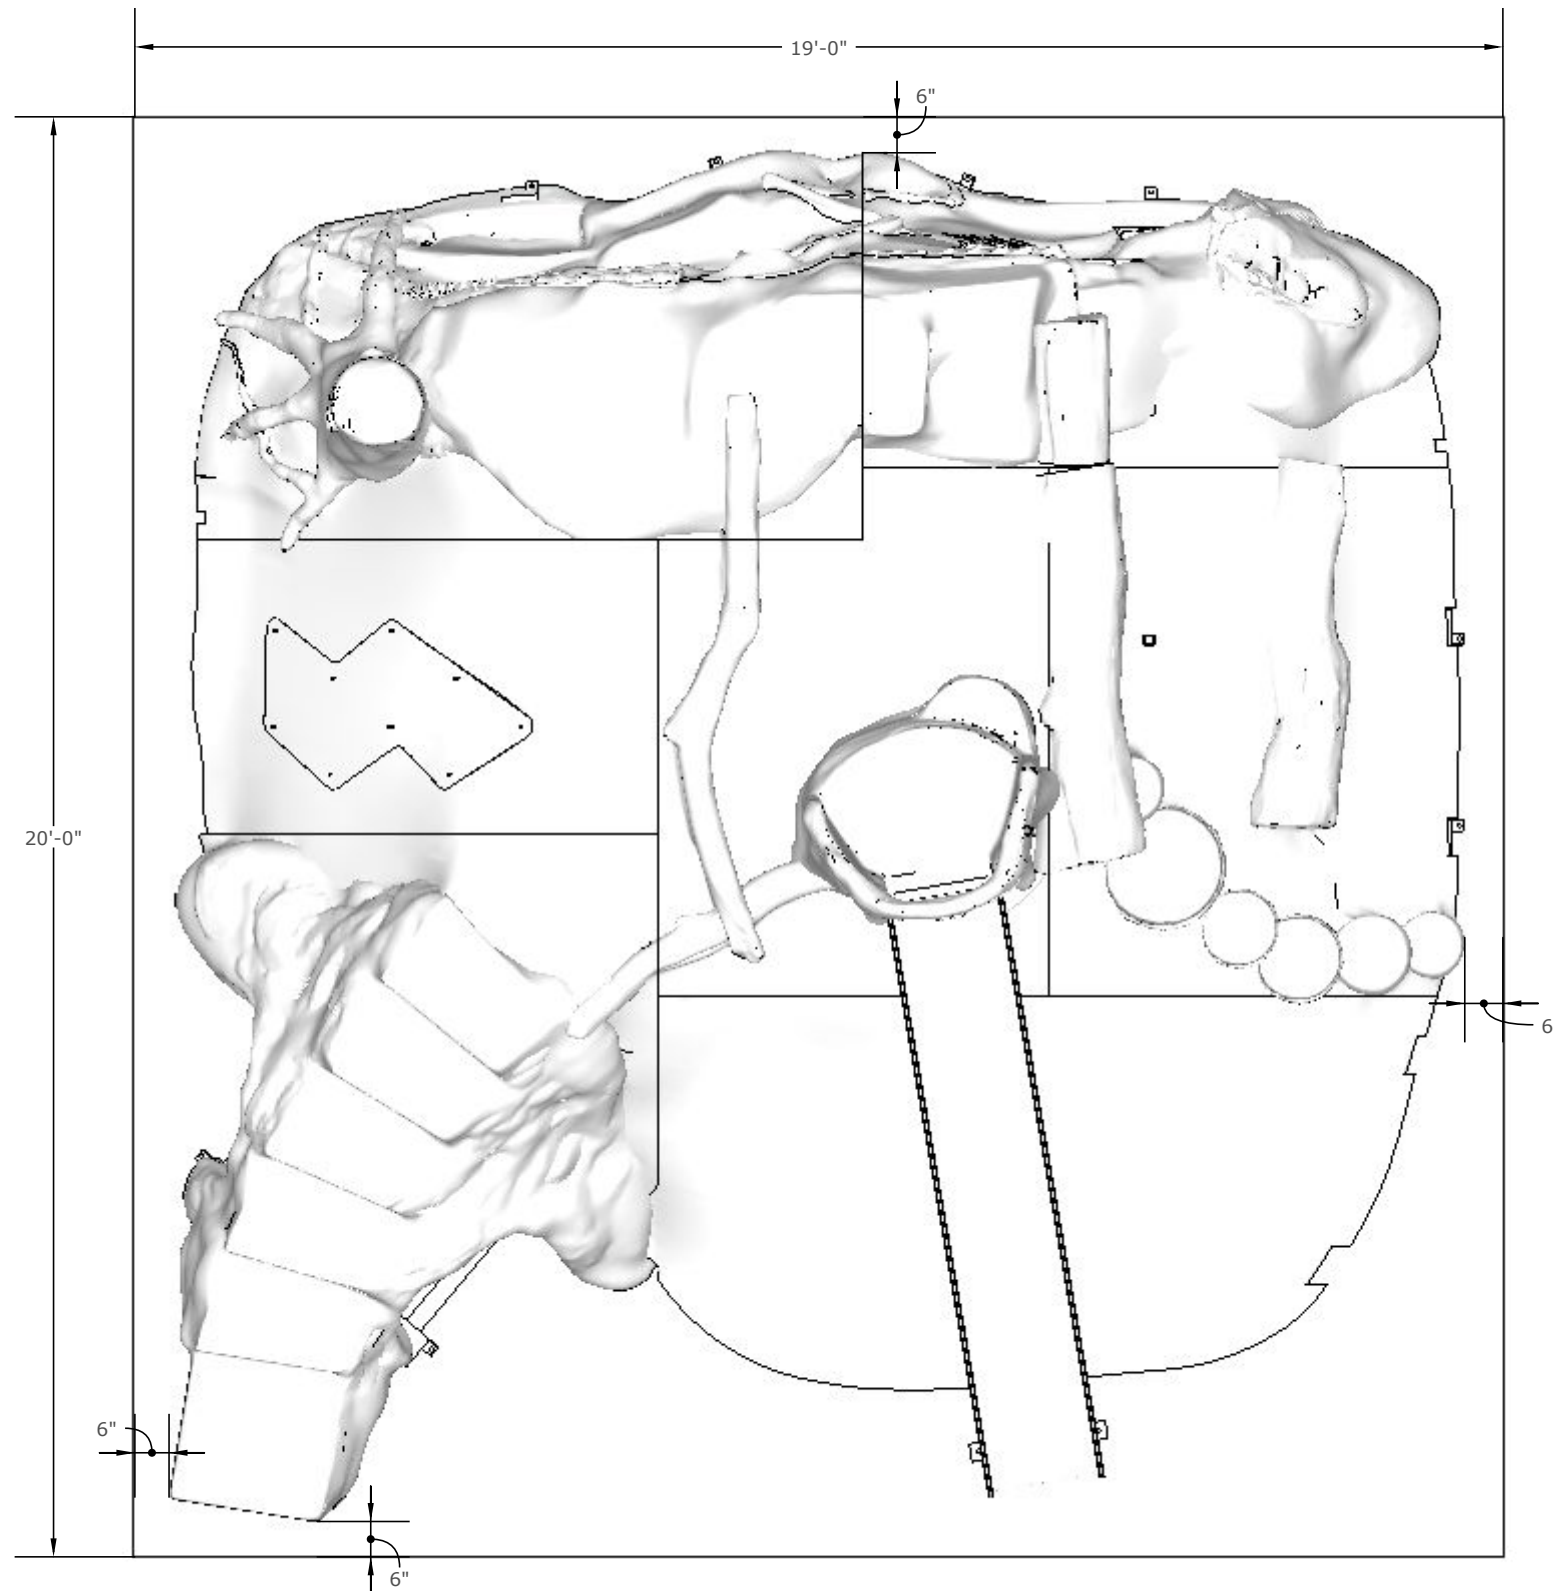


A
2 CONCRETE SLAB
PLAN VIEW

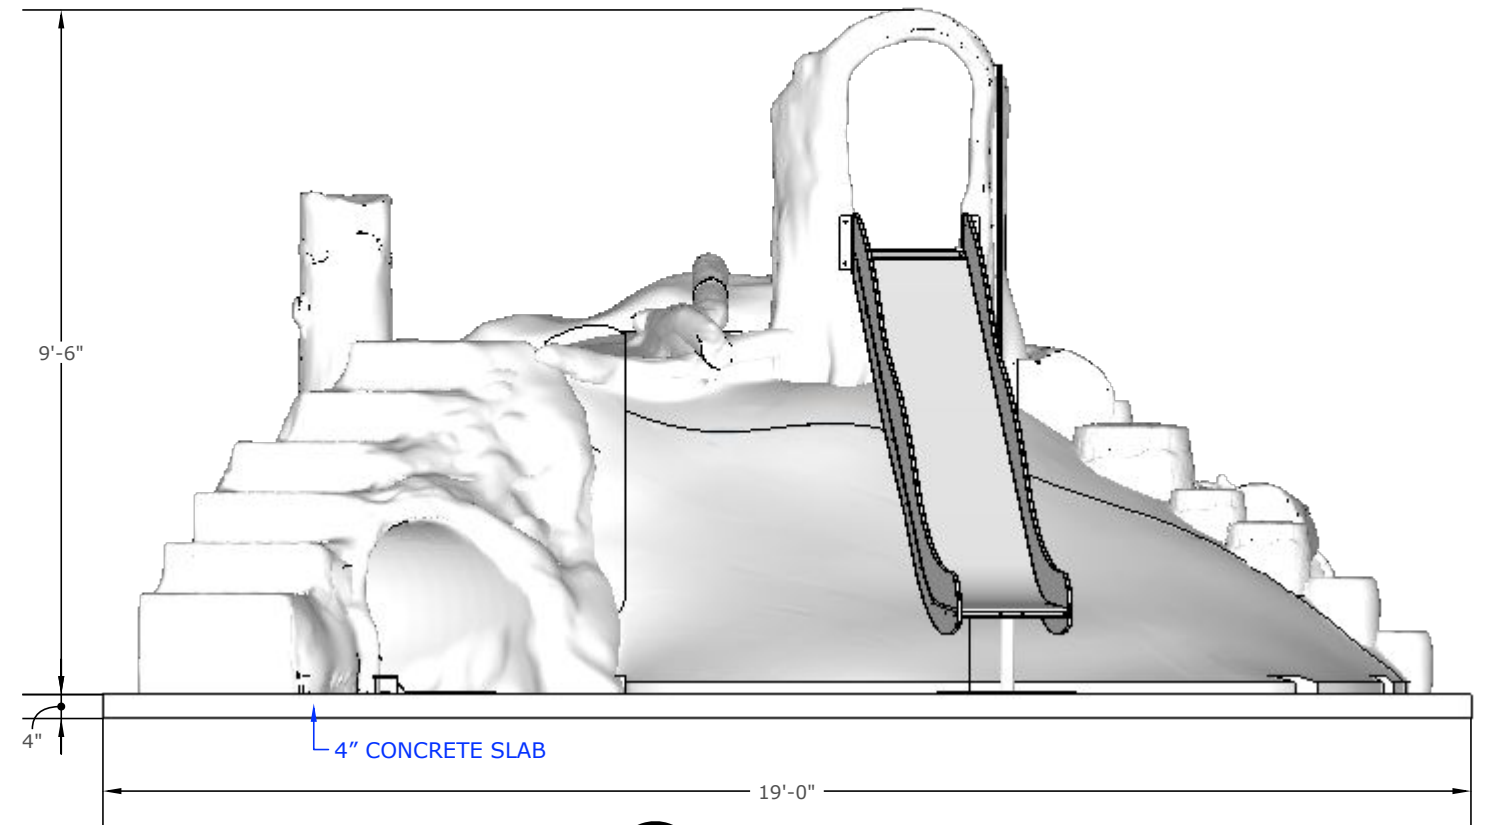


B
2 CONCRETE SLAB
ELEVATION


4" THICK CONCRETE SLAB
TYPICAL (VERIFY FOR LOCAL CONDITIONS)
MIN 3,500 PSI CONCRETE WITH
6 X 6 WIRE MESH W2.9 X W2.9 W.W.F.
FLAT SHEETS, CENTERED IN THE SLAB
-OR-
FIBER REINFORCED CONCRETE MIX
EQUIVALENT IN STRENGTH TO
MIN 3,500 PSI CONCRETE WITH
6 X 6 WIRE MESH W2.9 X W2.9 W.W.F.
FLAT SHEETS, CENTERED IN THE SLAB
(BY OTHERS)

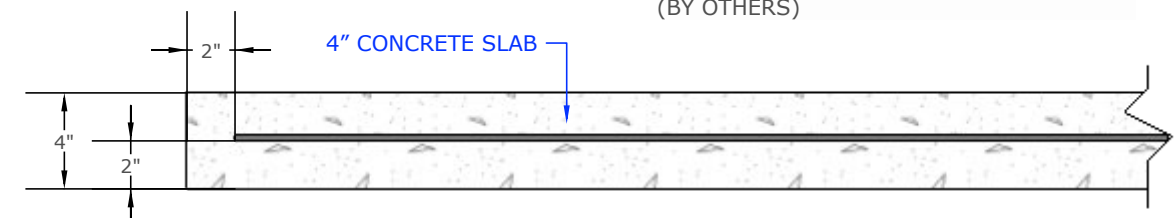


C
2 CONCRETE SLAB
SECTION

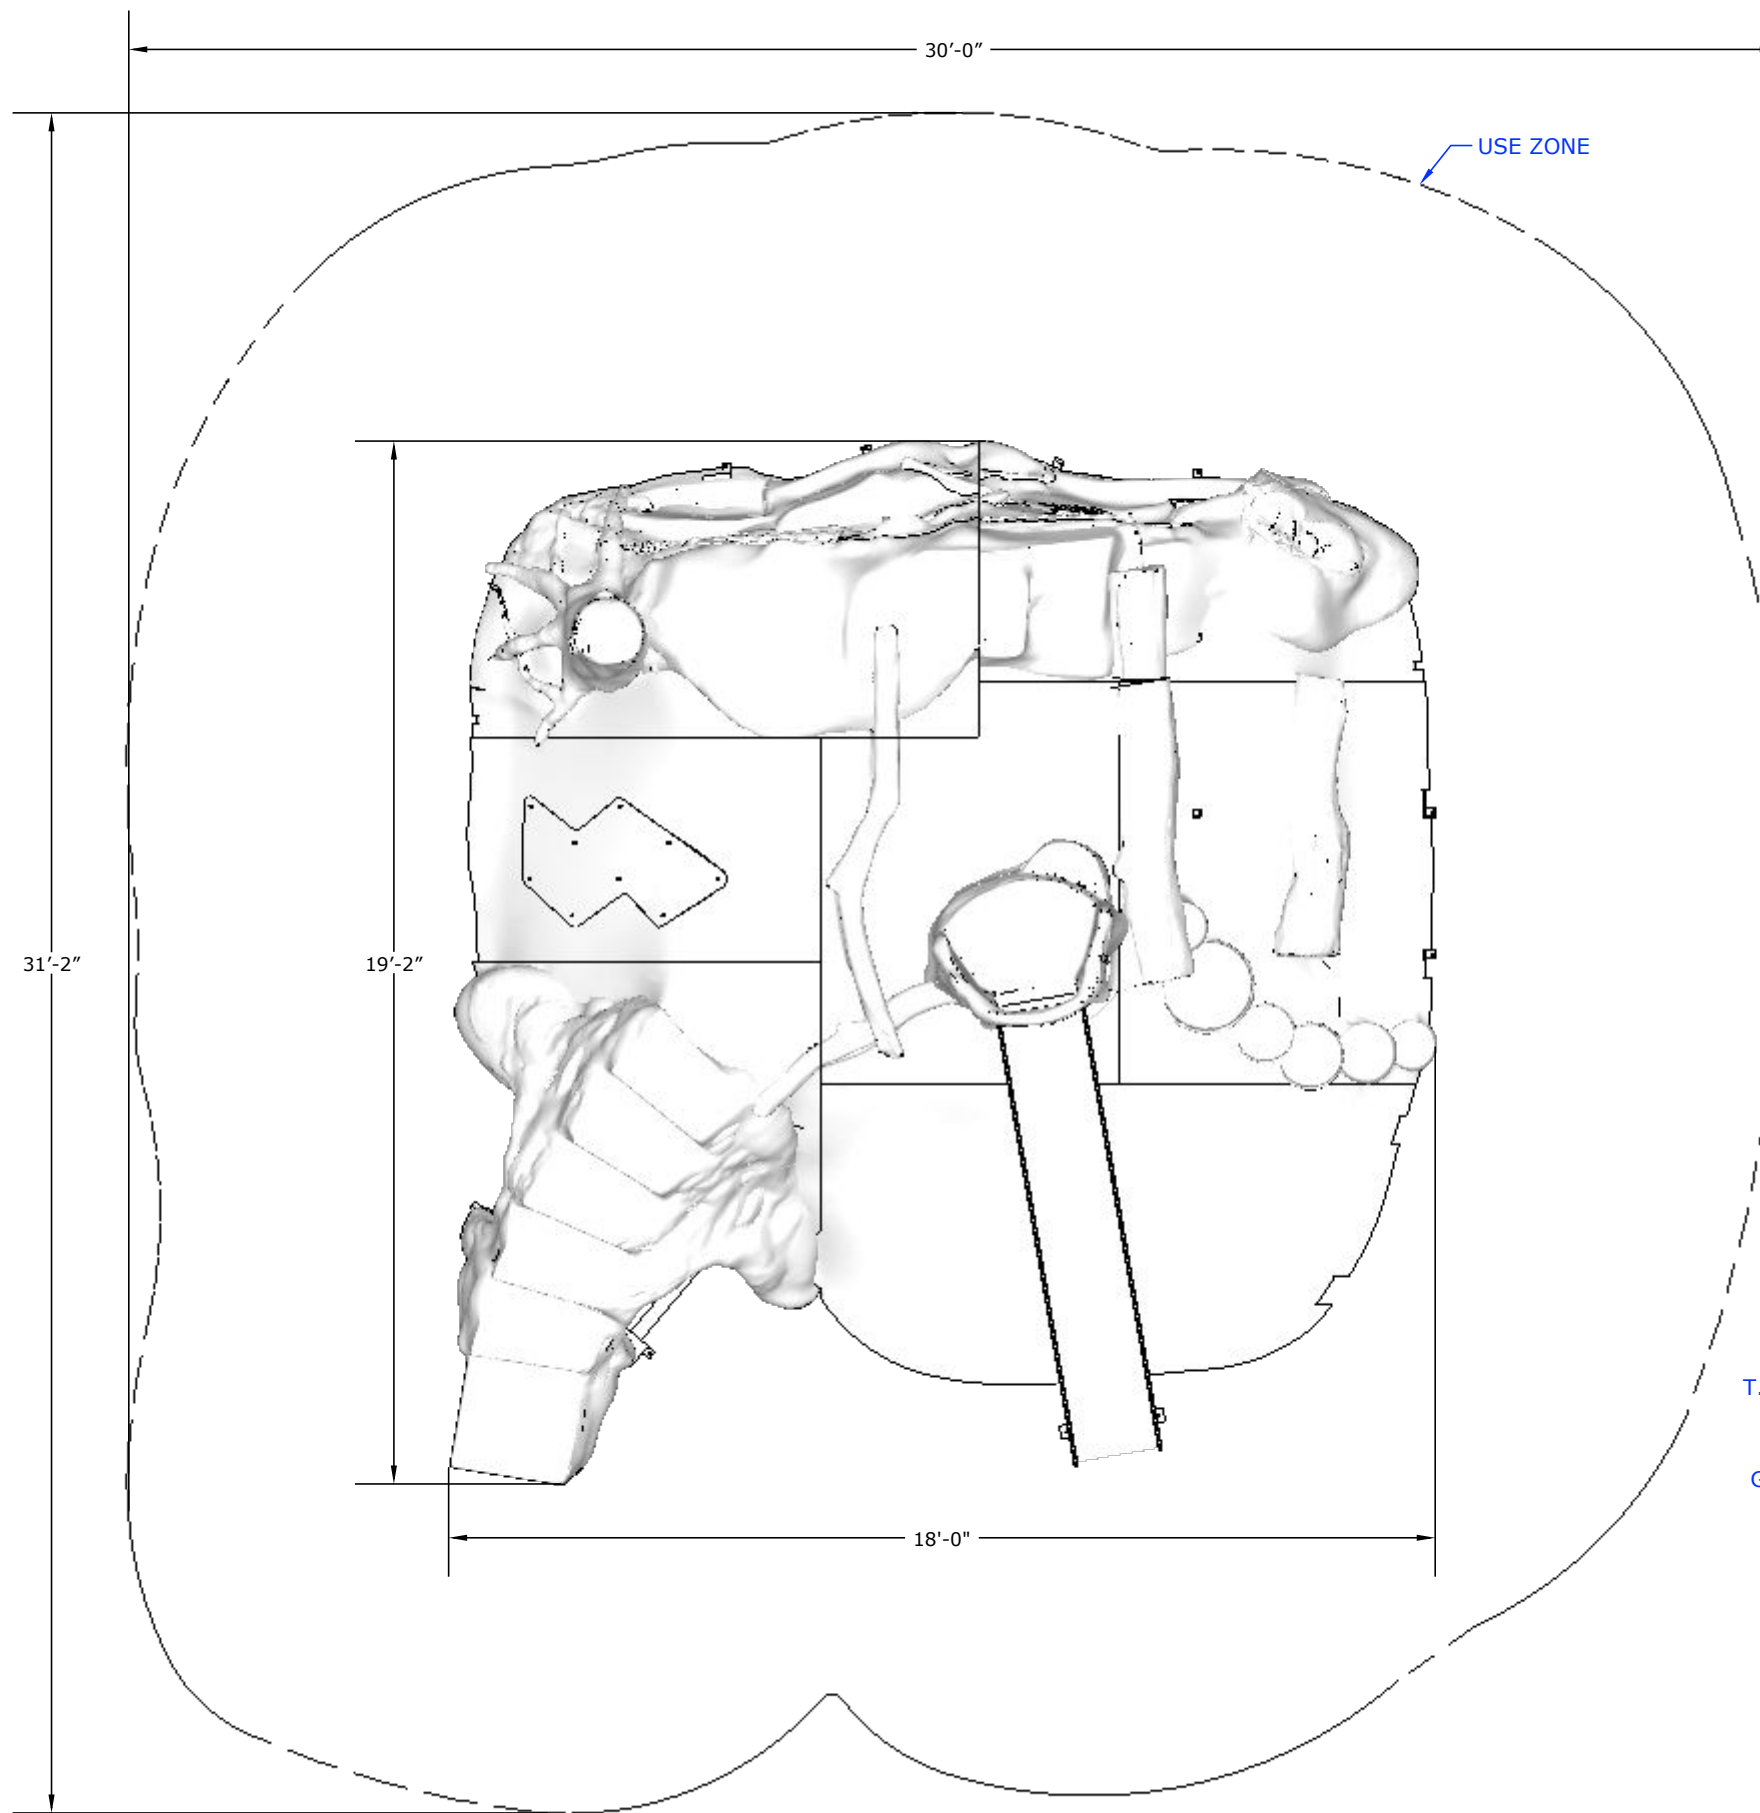



A
3 LANDFORM
PLAN VIEW

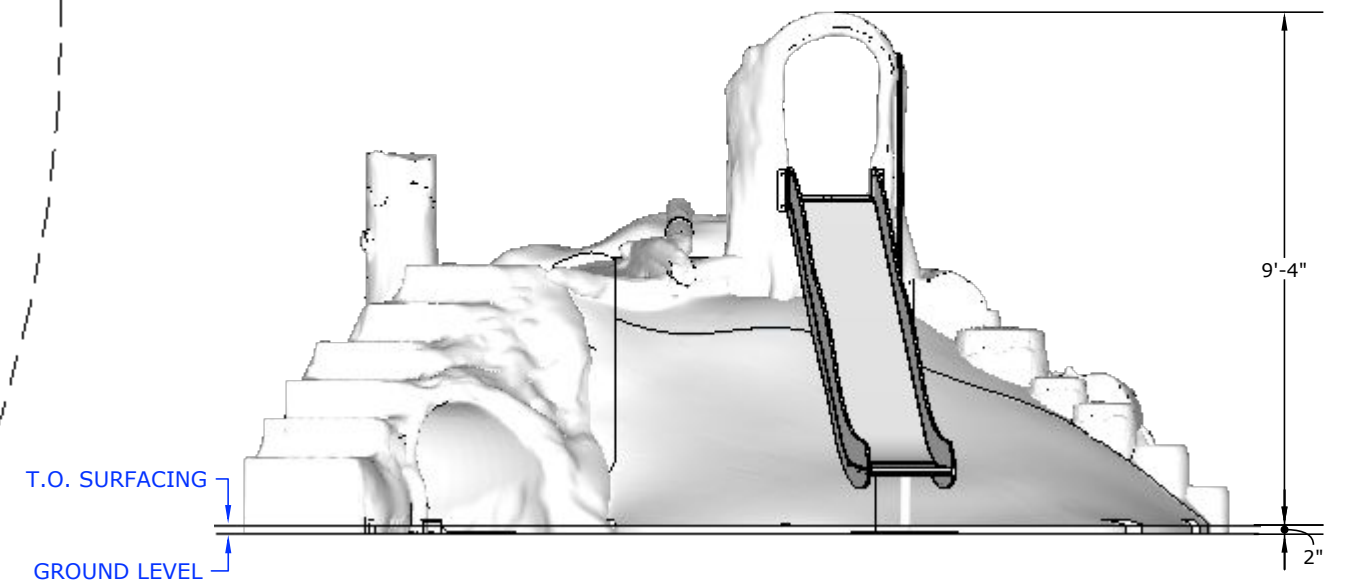

B
3 LANDFORM
ELEVATION

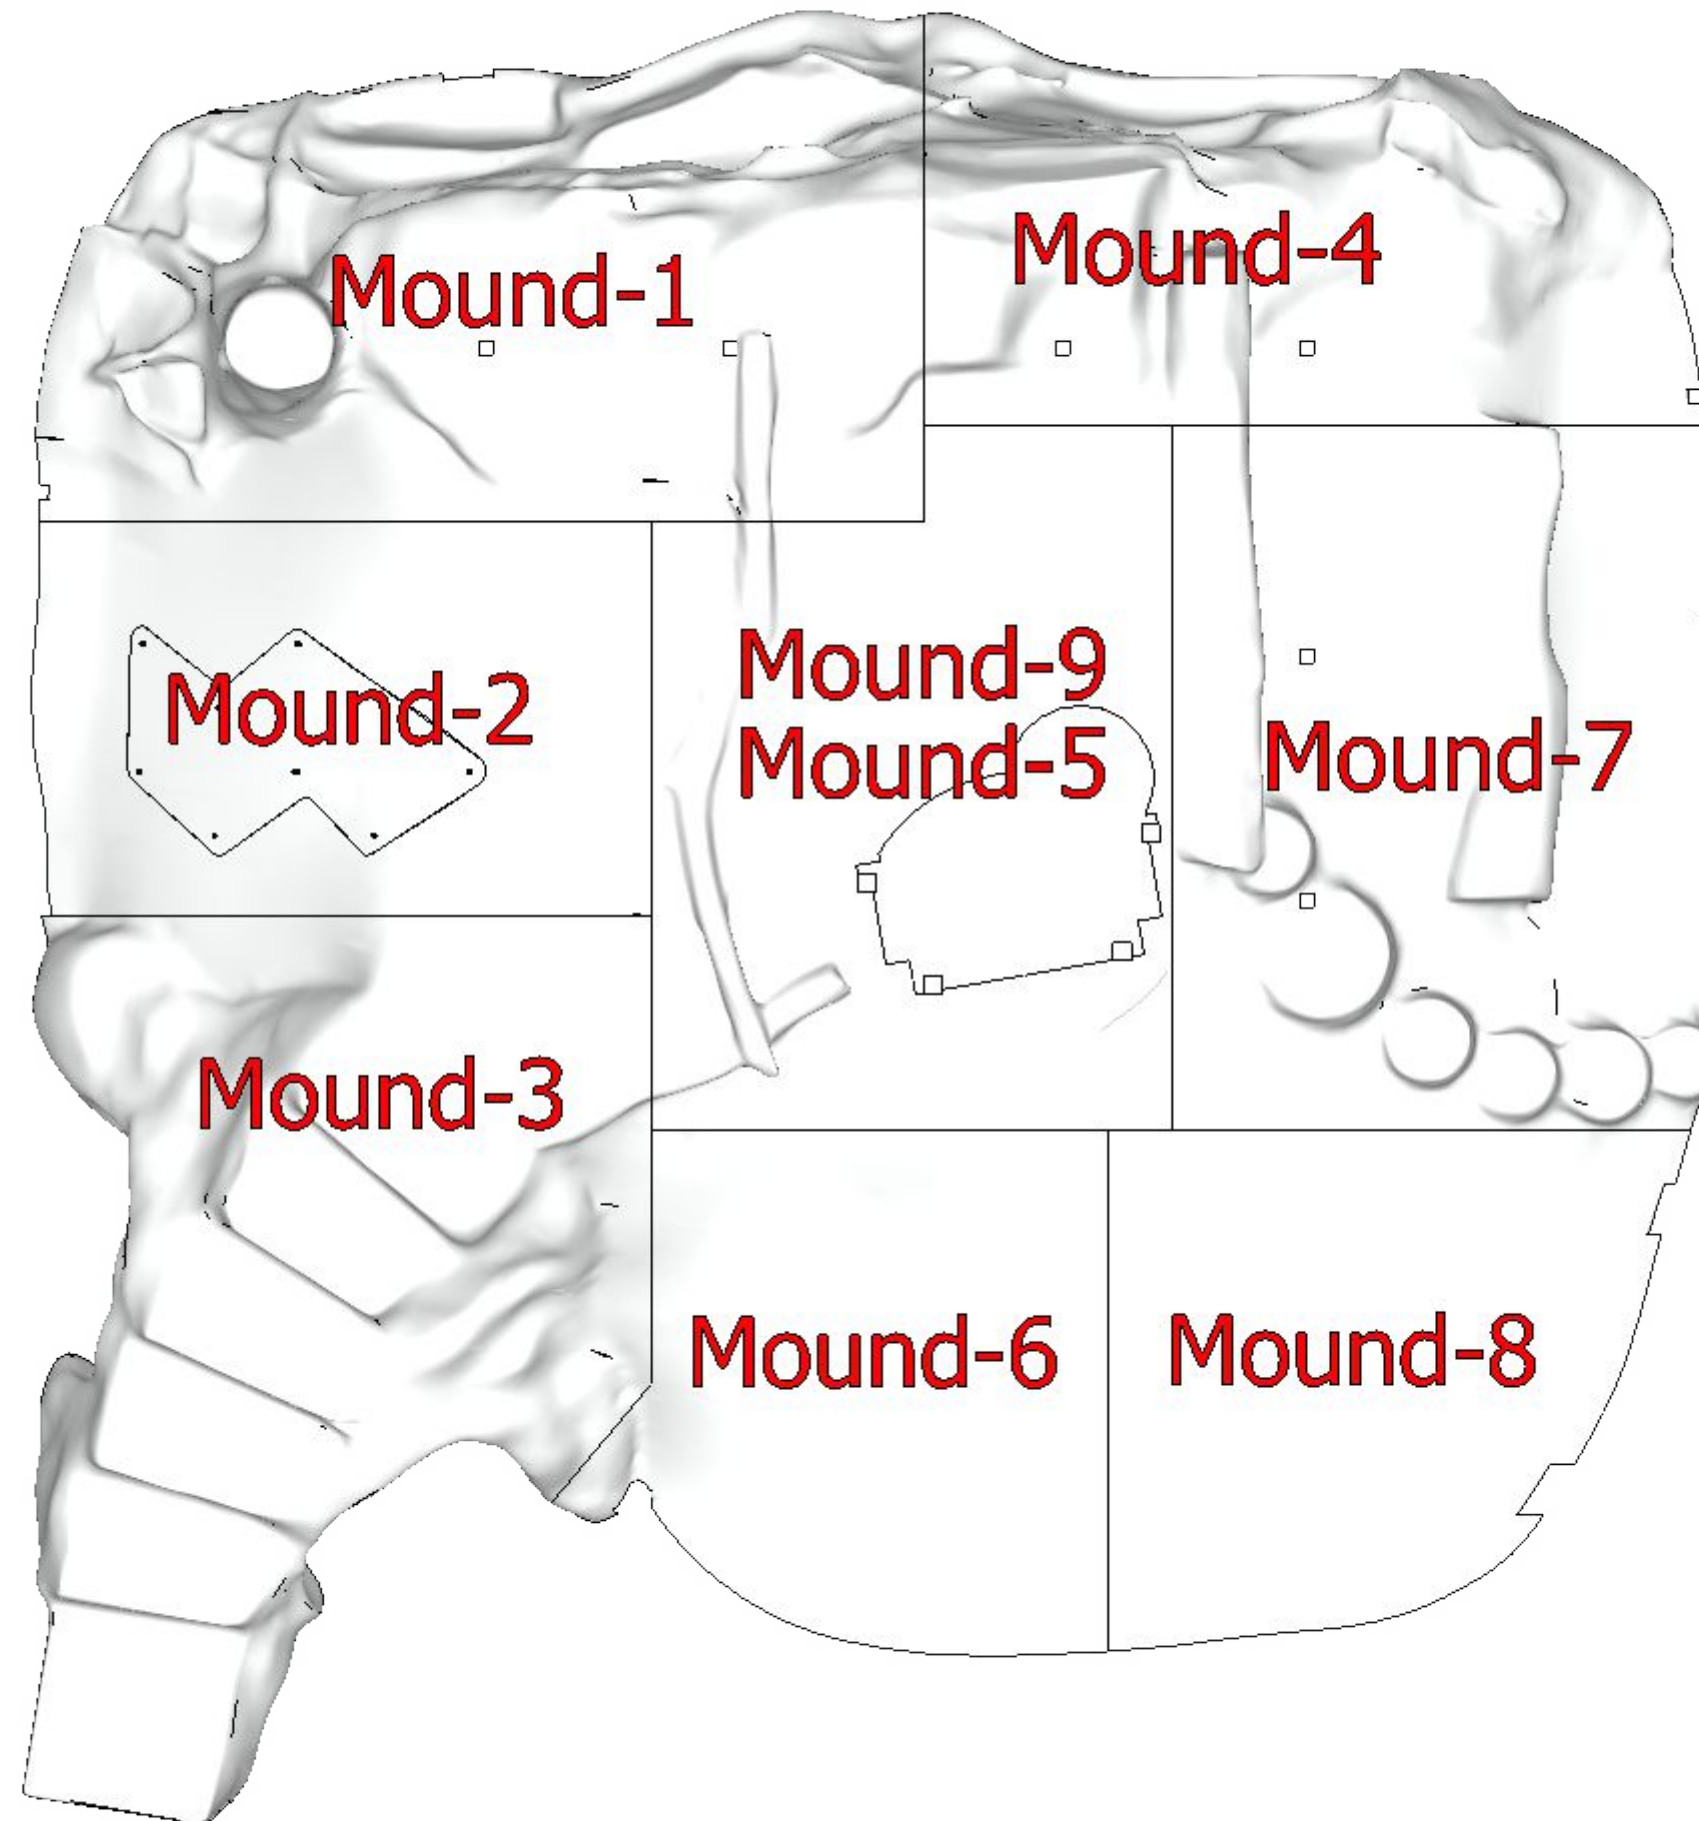


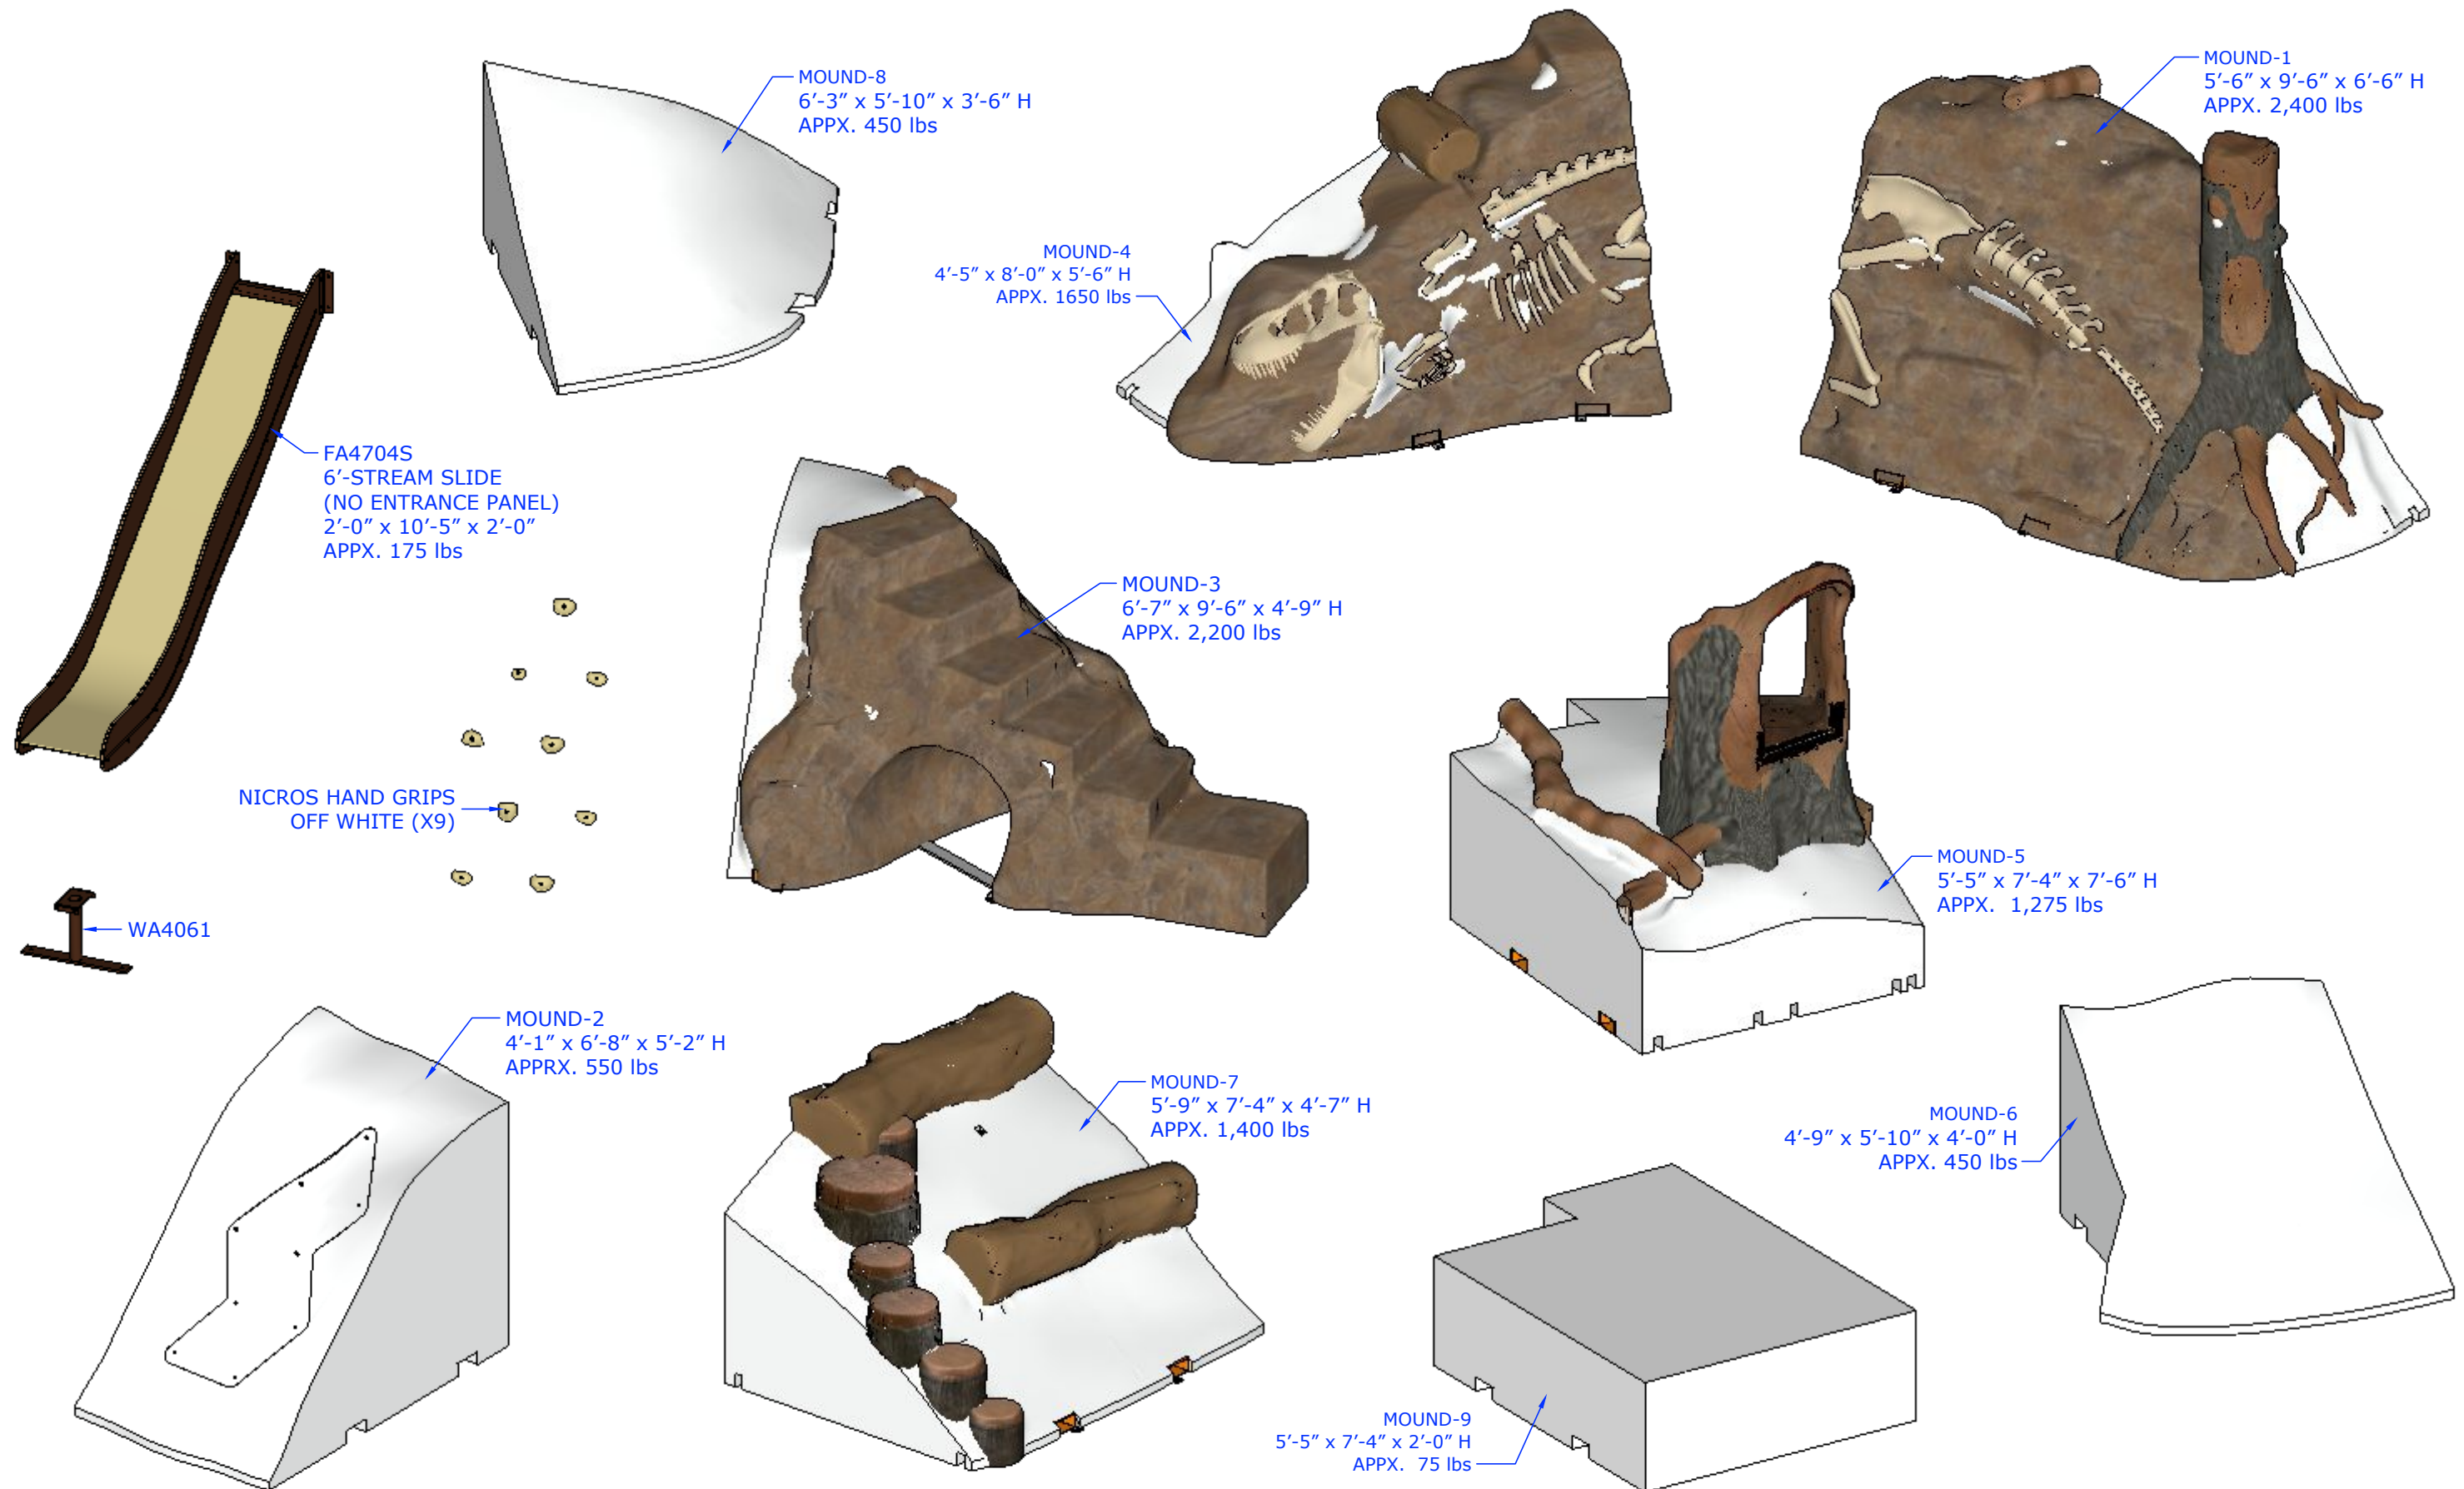

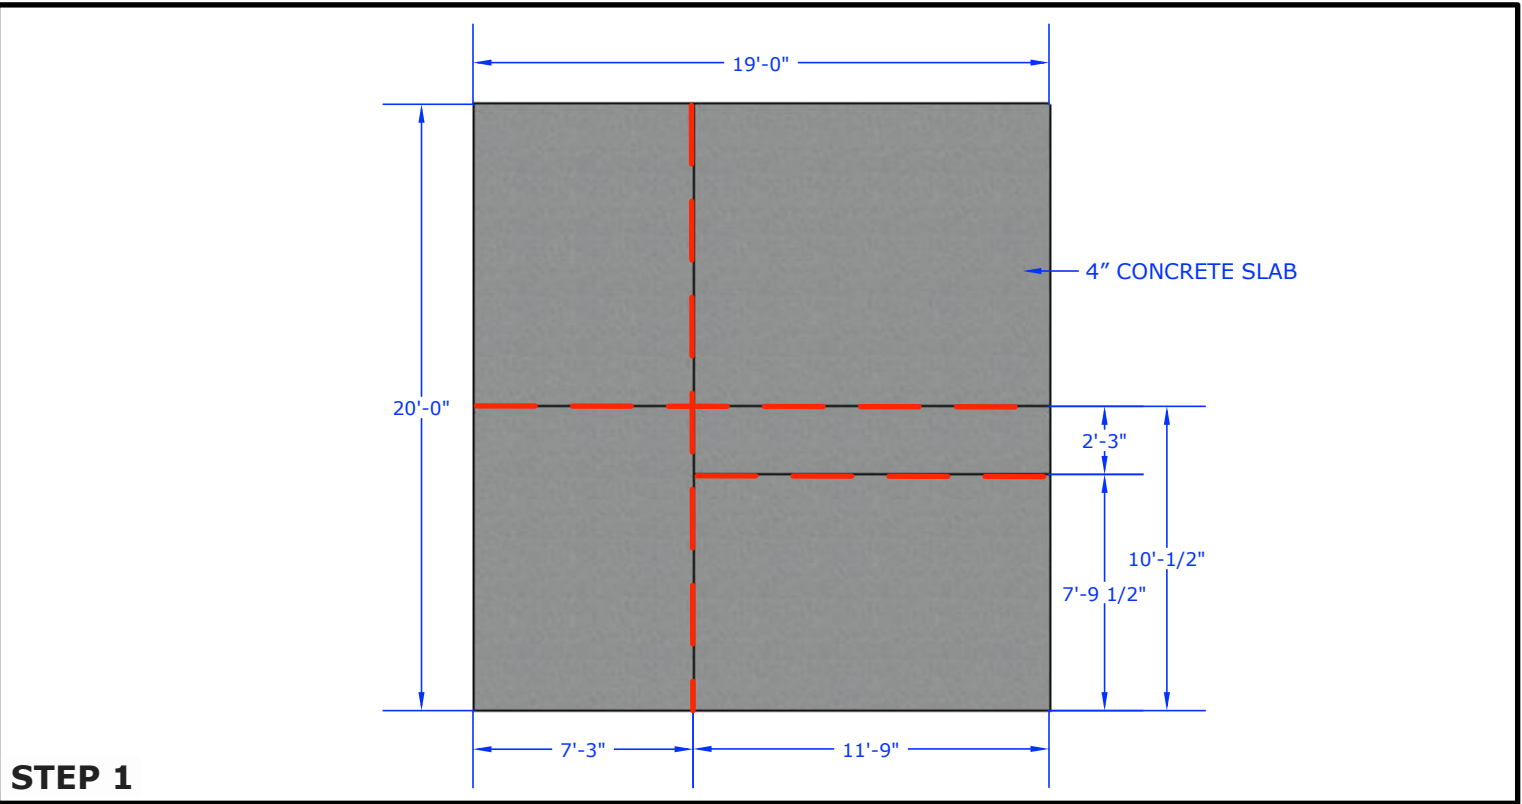


STEP 1

Mark lines on the concrete as shown above (3 places).

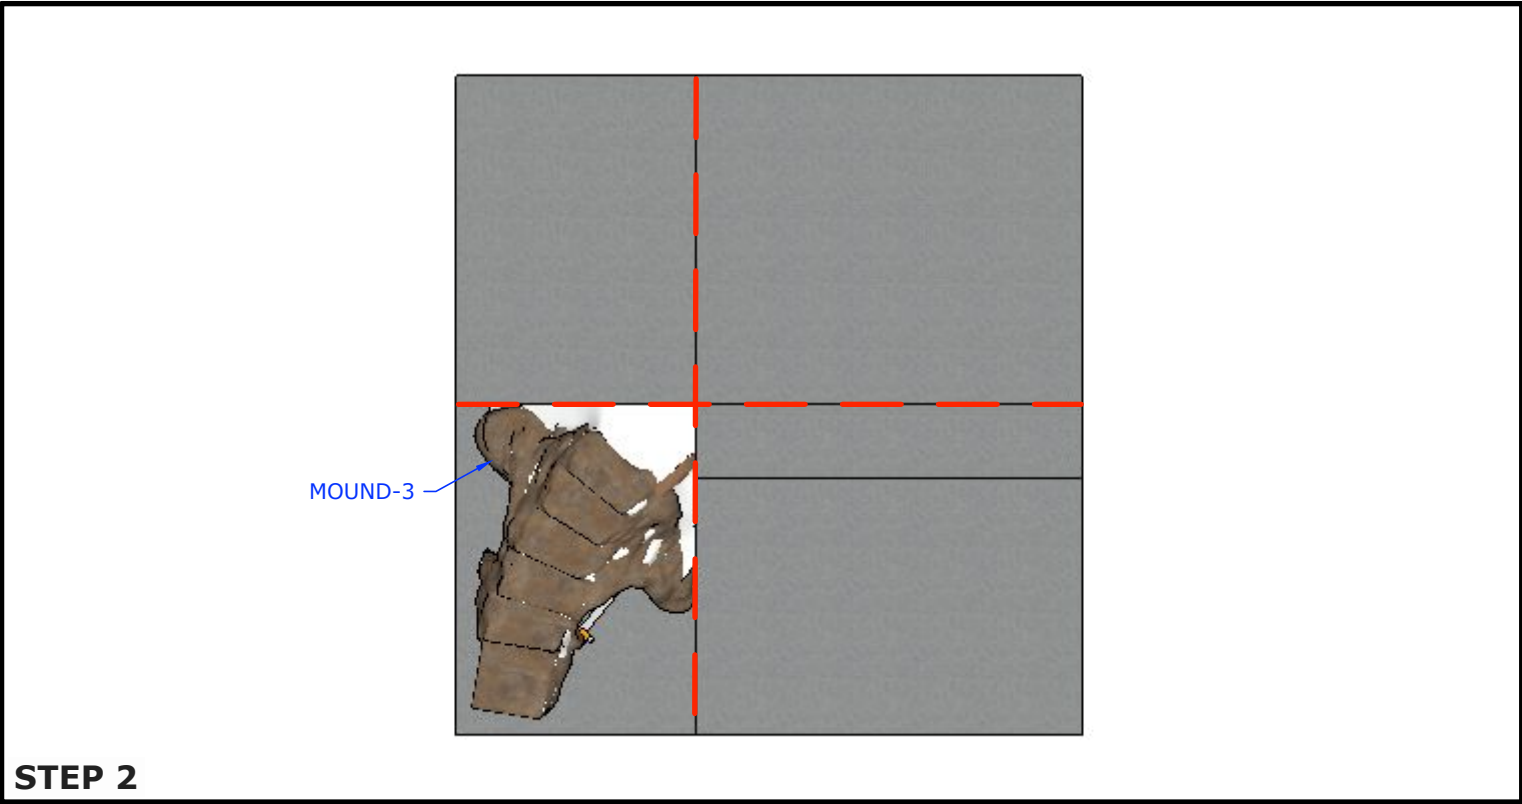


STEP 2

Start by placing Mound-3 as shown above.

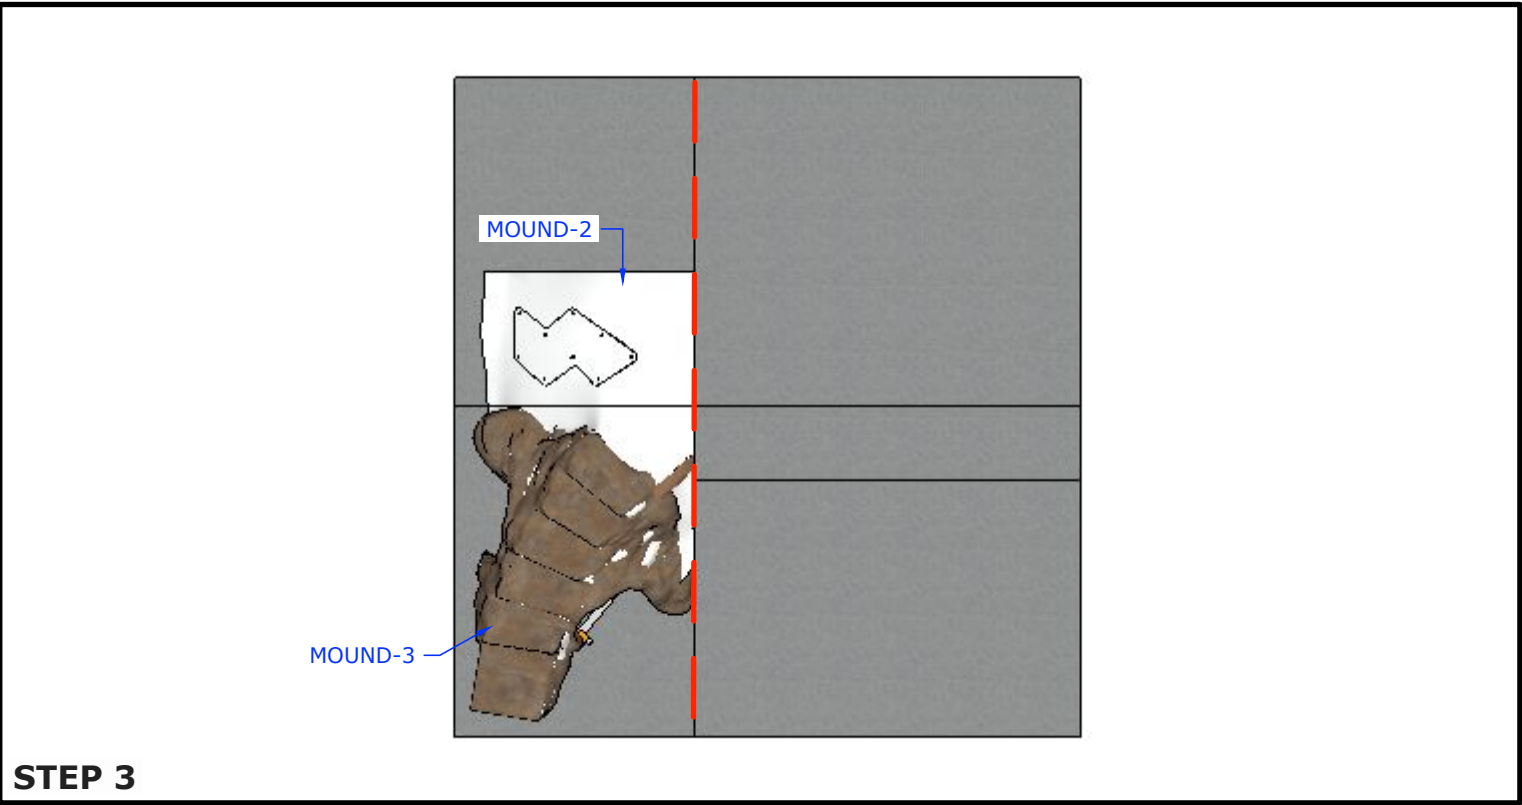


STEP 3

Line Mound-2 up to Mound-3 and glue together using hardware kit HK163. Place the tip of the glue gun between the foam and the floor and apply glue to the 4 corners in each of the foam units.

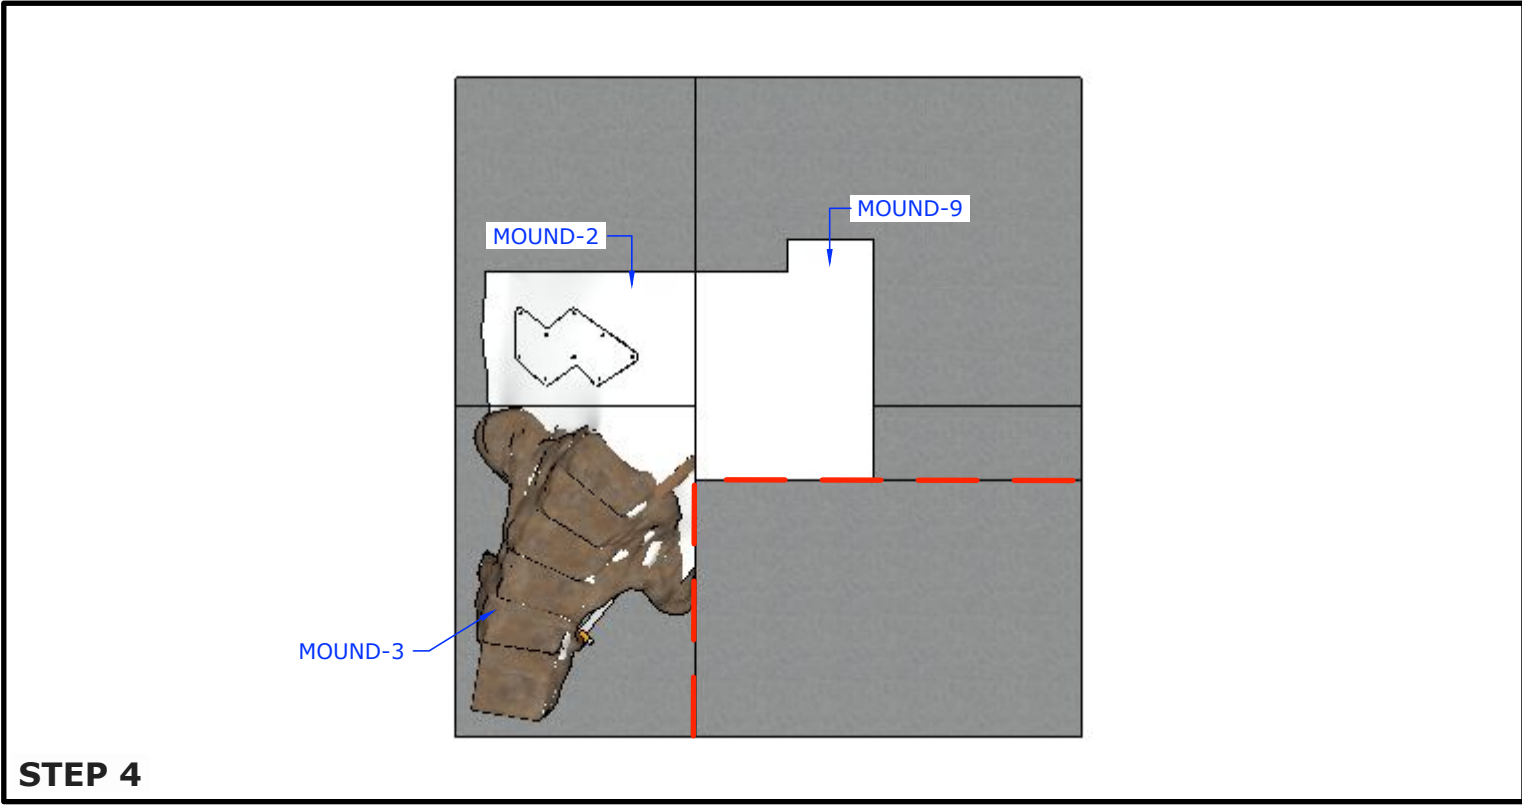


STEP 4

Line Mound-9 up to Mound-2 and Mound-3 as shown above. Glue together using hardware kit HK163. Place the tip of the glue gun between the foam and the floor and apply glue to the 4 corners of the foam unit.

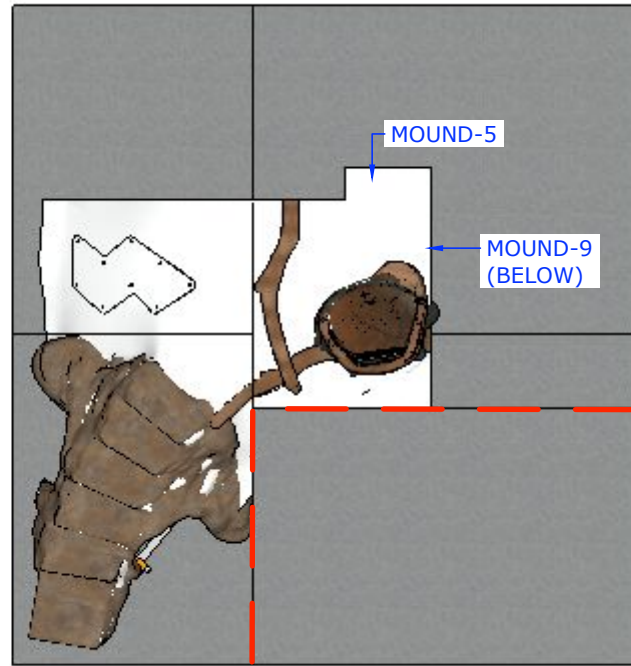


STEP 5

Place Mound-5 on top of Mound-9 and align as shown above. Glue together using hardware kit HK163.

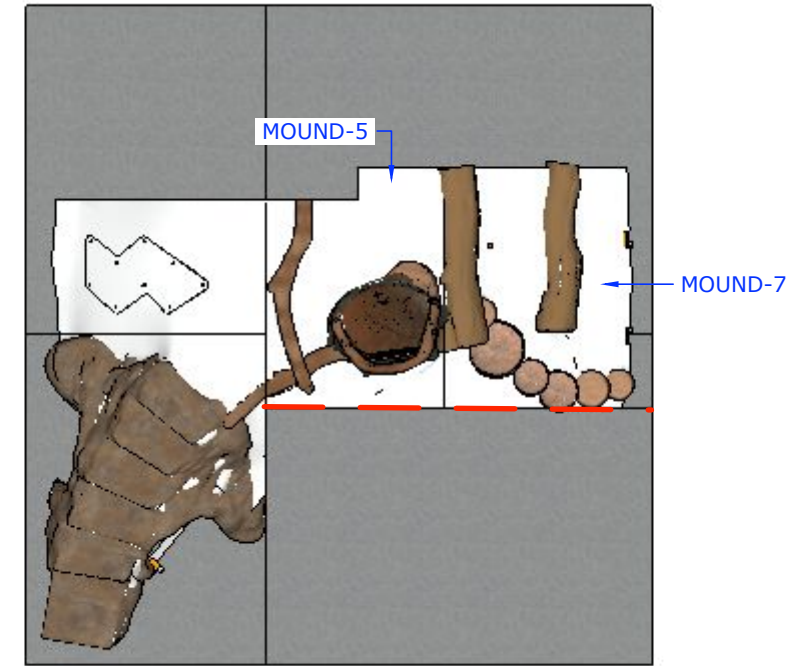


STEP 6

Line Mound-7 up to Mound-5 and glue together using hardware kit HK163. Place the tip of the glue gun between the foam and the floor and apply glue in the 4 corners of the foam unit.

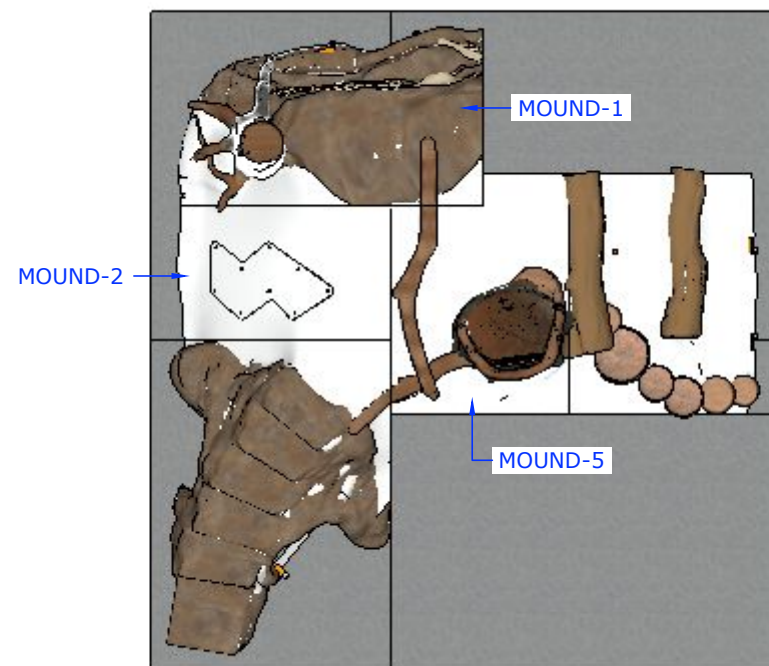


STEP 7

Line Mound-1 up to Mound-2 and Mound-5 as shown above. Glue together using hardware kit HK163. Place the tip of the glue gun between the foam and the floor and apply glue in the 4 corners of the foam unit.

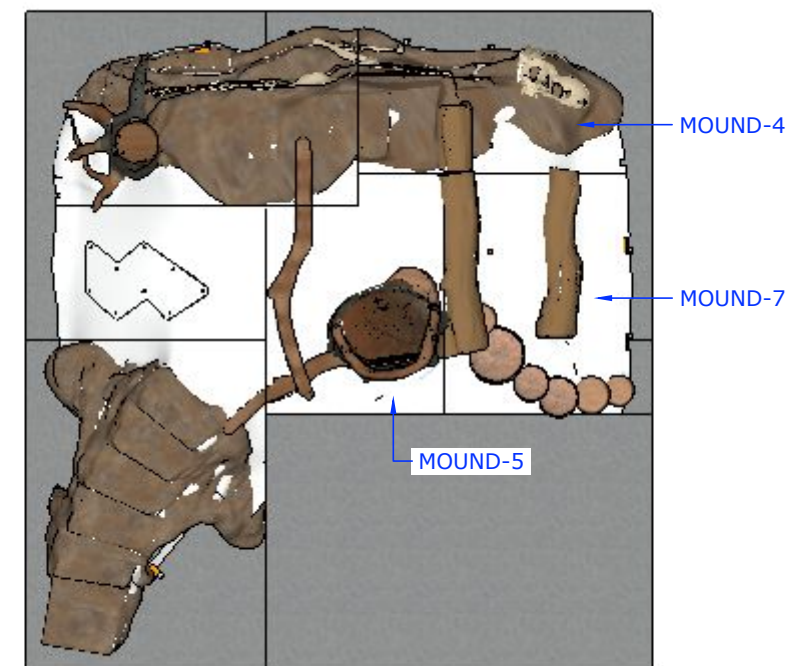


STEP 8

Line Mound-4 up to Mound-5 and Mound-7 as shown above. Glue together using hardware kit HK163. Place the tip of the glue gun between the foam and the floor and apply glue in the 4 corners of the foam unit.

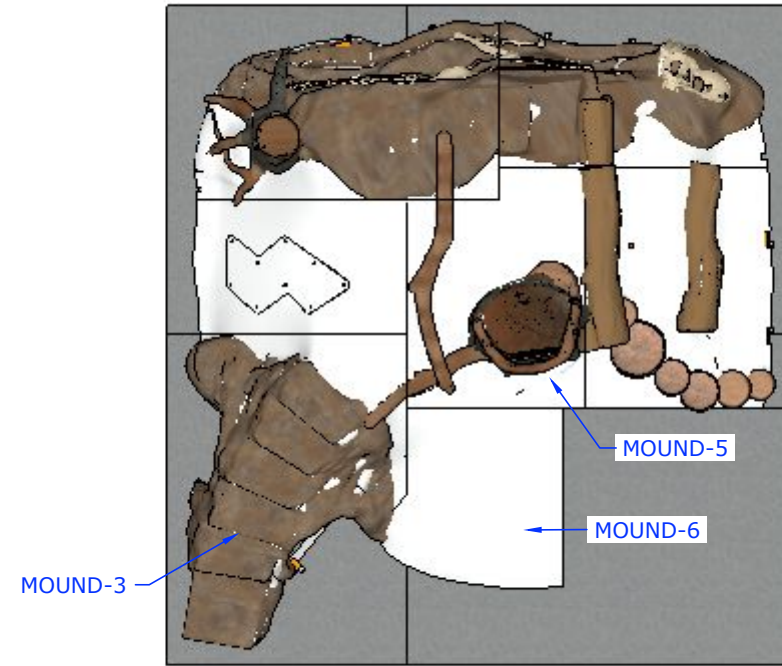


STEP 9

Line Mound-6 up to Mound-5 and Mound-3 as shown above. Glue together using hardware kit HK163. Place the tip of the glue gun between the foam and the floor and apply glue in the 4 corners of the foam unit.

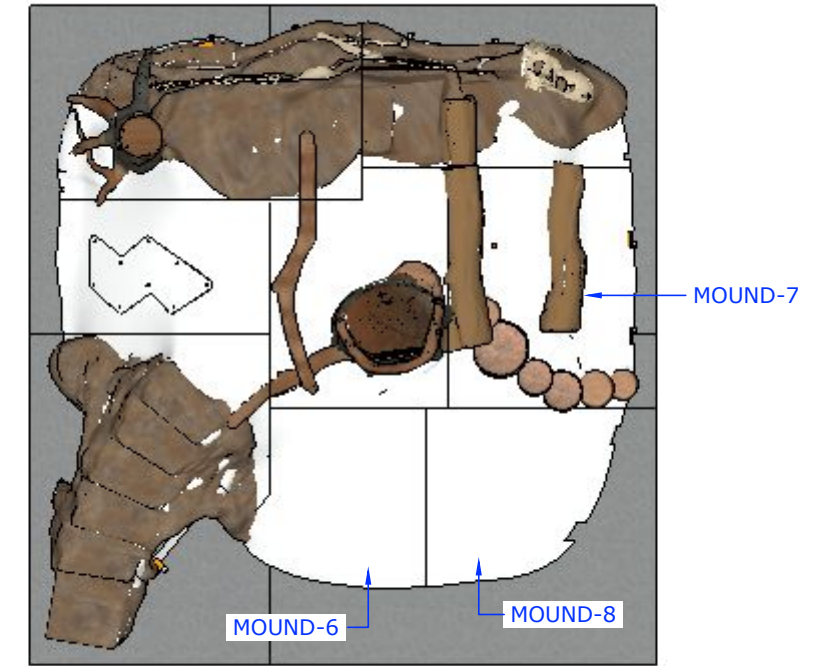


STEP 10

Line Mound-8 up to Mound-6 and Mound-7 as shown above. Glue together using hardware kit HK163. Place the tip of the glue gun between the foam and the floor and apply glue in the 4 corners of the foam unit.

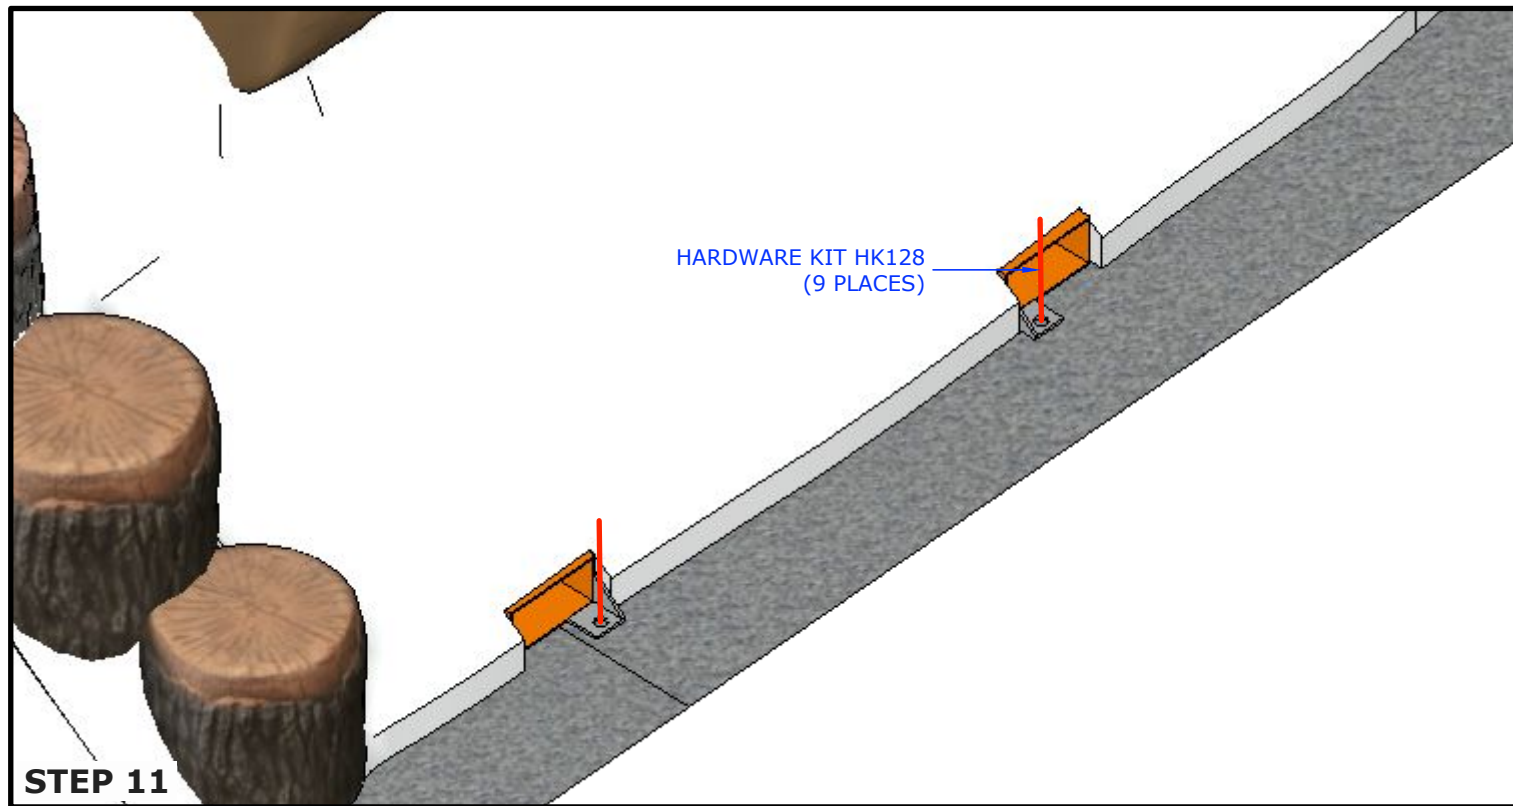


STEP 11

Anchor the fork pockets to the concrete on each of the mound units using hardware kit HK128 (9 Places).

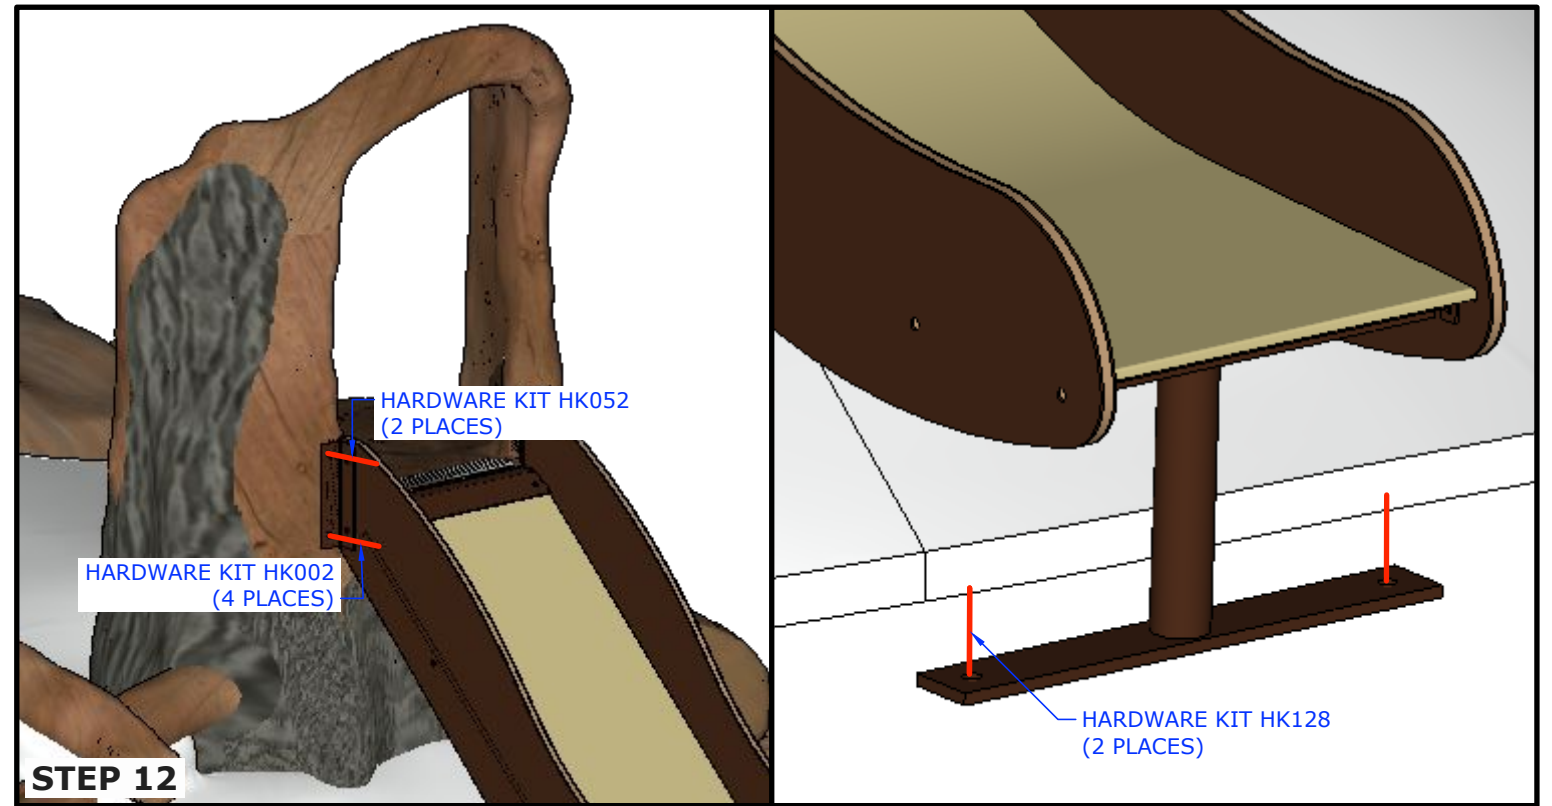

STEP 12

Install the Stream Slide to the slide deck using Hardware Kit HK052 in the top-2 bracket holes (2 places). Attach the bottom of the slide to the slide mount deck using hardware kit HK002 (4 places). Anchor the Stream Slide support to the concrete using hardware kit HK128 (2 places).

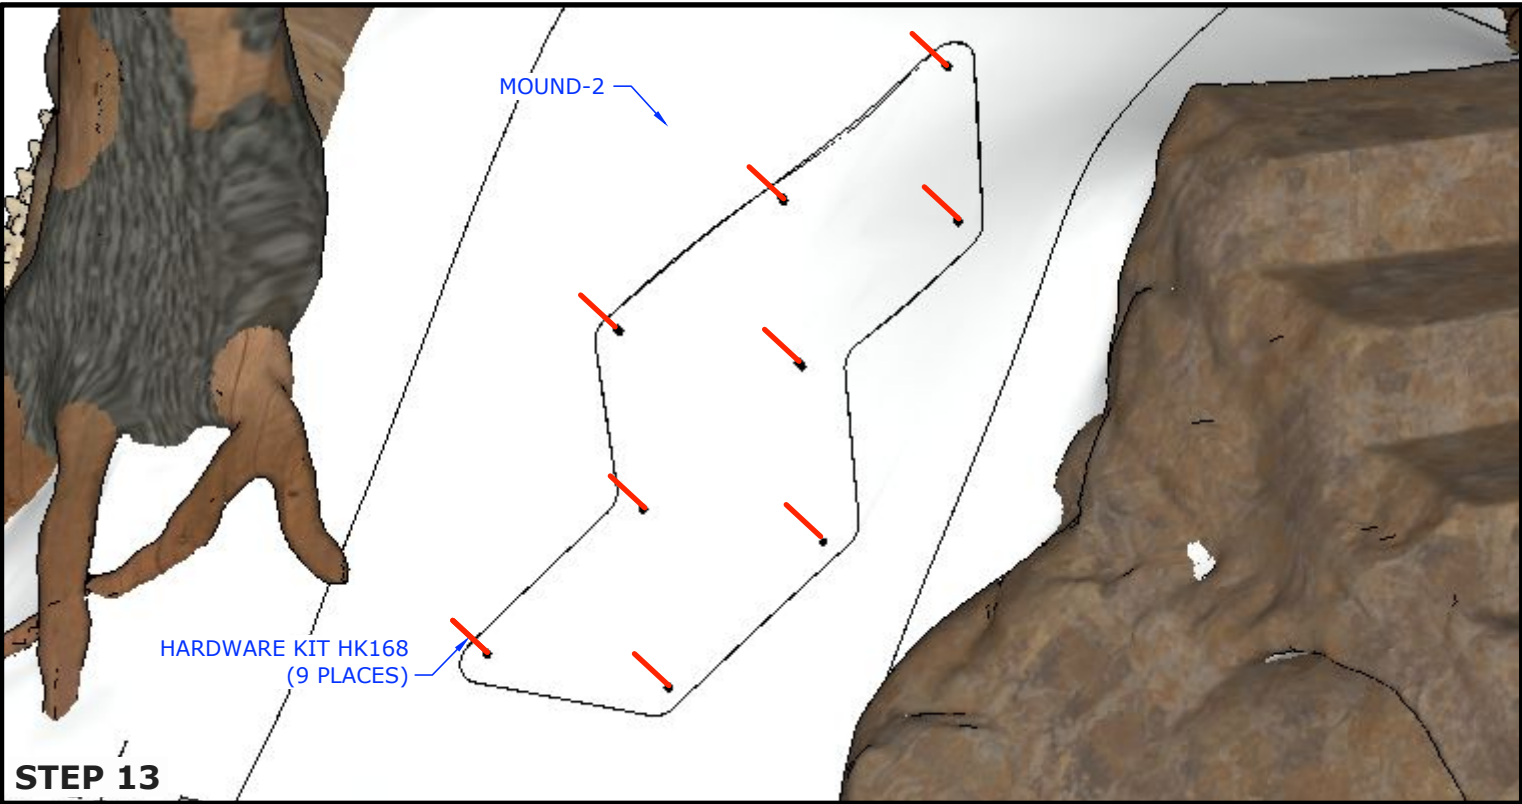

STEP 13

Using hardware kit HK168 insert the hex head bolts into the the handgrip inserts on Mound-2 (9 places).



STEP 14

Install surfacing (by others).




STEP 15

Remove the temporary hex head bolts on Mound-2 & install the hand grips using hardware kit HK169 (9 places). Use the 6" hex bolt in HK170 to help locate the threads. We send several bolt lengths as the attachment bolt length will vary depending on the surfacing thickness.

HARDWARE

HARDWARE KIT HK163			
GREAT STUFF PRO	X3		
GREAT STUFF PRO APPLICATION GUN	X1		
<i>*Great Stuff Pro Polyurethane Foam Adhesive</i>			
<i>With the dispensing gun fully open, dispense foam adhesive with a continuous bead, 4" apart.</i>			
<i>Yields: 120 sq. ft.</i>			
HARDWARE KIT HK128			
5/8" X 3" TAPCON LDT CONCRETE FASTENER	X11		
HARDWARE KIT HK052			
3/8" X 4 1/2" BUTTON HEAD, PIN-IN, SS BOLT	X2		
3/8" FLAT WASHER, SS	X4		
3/8" SPLIT LOCK WASHER, SS	X2		
3/8" NYLOCK NUT, SS	X2		
HARDWARE KIT HK002			
3/8" X 3/4" BUTTON HEAD, PIN-IN, SS BOLT	X4		
3/8" FLAT WASHER, SS	X4		
3/8" SPLIT LOCK WASHER, SS	X4		
HARDWARE KIT HK168			
3/8" X 1 1/2" HEX HEAD ZINC BOLTS		X9	
HARDWARE KIT HK170			
3/8" x 6" HEX HEAD BOLT, ZINC		X1	
HARDWARE KIT HK169			
3/8" X 1 1/2" BUTTON HEAD BOLT		X9	
3/8" X 1 3/4" BUTTON HEAD BOLT		X10	
3/8" X 2" BUTTON HEAD BOLT		X20	
3/8" SPLIT LOCK WASHER		X15	

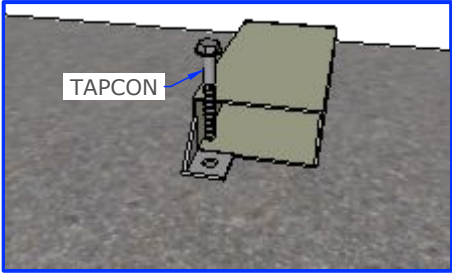

HARDWARE KIT #HK128
CONCRETE ANCHOR DETAIL